

INMATEH -

**AGRICULTURAL
ENGINEERING**

SEPTEMBER - DECEMBER

No liability is assumed by the editorial staff for the content of scientific papers and opinions published in this volume. They represent the author's point of view

Editorial

The National Institute of Research-Development for Machines and Installations designed to Agriculture and Food Industry - INMA Bucharest has the oldest and most prestigious research activity in the field of agricultural machinery and mechanizing technologies in Romania.

Short History

- ✓ *In 1927, the first research Center for Agricultural Machinery in Agricultural Research Institute of Romania - ICAR (Establishing Law was published in O.D. no. 97/05.05.1927) was established;*
- ✓ *In 1930, was founded The Testing Department of Agricultural Machinery and Tools by transforming Agricultural Research Centre of ICAR- that founded the science of methodologies and experimental techniques in the field (Decision no. 2000/1930 of ICAR Manager - GHEORGHE IONESCU ȘIȘEȘTI);*
- ✓ *In 1952, was established the Research Institute for Mechanization and Electrification of Agriculture - ICMA Băneasa, by transforming the Department of Agricultural Machines and Tools Testing;*
- ✓ *In 1979, the Research Institute of Scientific and Technological Engineering for Agricultural Machinery and Tools - ICSITMUA was founded - subordinated to Ministry of Machine Building Industry - MICM, by unifying ICMA subordinated to MAA with ICPMA subordinated to MICM;*
- ✓ *In 1996 the National Institute of Research-Development for Machines and Installations designed to Agriculture and Food Industry - INMA was founded - according to G.D. no.1308/25.11.1996, by reorganizing ICSITMUA, G.D no. 1308/1996 coordinated by the Ministry of Education and Research G.D. no. 823/2004;*
- ✓ *In 2008 INMA has been accredited to carry out research and developing activities financed from public funds under G.D. no. 551/2007, Decision of the National Authority for Scientific Research - ANCSno. 9634/2008.*

As a result of widening the spectrum of communication, dissemination and implementation of scientific research results, in 2000 was founded the institute magazine, issued under the name of SCIENTIFIC PAPERS (INMATEH), ISSN 1583 – 1019.

*Starting with volume 30, no. 1/2010, the magazine changed its name to INMATEH - *Agricultural Engineering*, appearing both in print format (ISSN 2068 - 4215), and online (ISSN online: 2068 - 2239). The magazine is bilingual, abstract being published in native language and English, with a rhythm of three issues / year: January-April, May-August, September-December and is recognized by CNCSIS – with B⁺ category. Published articles are from the field of AGRICULTURAL ENGINEERING: technologies and technical equipment for agriculture and food industry, renewable energy, machinery testing, environment, transport in agriculture etc. and are evaluated by specialists inside the country and abroad, in mentioned domains.*

*Technical level and performance processes, technology and machinery for agriculture and food industry increasing, according to national requirements and European and international regulations, as well as exploitation of renewable resources in terms of efficiency, life, health and environment protection represent referential elements for the magazine „INMATEH - *Agricultural Engineering*”.*

We are thankful to all readers, publishers and assessors.

Editor in chief,

Ph. D. Eng. Vladut Nicolae-Valentin

Managing Editorial Board - INMA Bucharest**Editor in Chief****VLADUȚ Nicolae-Valentin**

Ph.D.Eng, SR I

E-mail: inmatehjournal@gmail.com**Executive Editor****POPA Lucreția**

Ph.D.Eng, SR I

Assistant Editor**MATACHE Mihai-Gabriel**

Ph.D.Eng, SR I

Logistic support, database**MURARU Virgil, Ph.D.Eng, SR I****ȚICU Tania, techn.****Scientific Secretary****Cârdei Petre, math.****Official translators****RADU Daniela-Cristina, Prof. English, French****Editorial Board**

- Acad. Prof. Ph.D. TABĂRA Valeriu - Romania, President of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șişești";
- Ph.D. BOGOESCU Marian - Romania, Vicepresident of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șişești";
- Hon.Prof.Ph.D.Eng. PIRNA Ion - Romania, President of the Department of Agricultural Mechanization of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șişești";
- Ph.D. Eng. NICOLESCU C. Mihai - Romania, Scientific General Secretary of the ASAS-Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șişești";
- Assoc.Prof. Ph.D. Eng. BELC Nastasia - Romania, IBA Bucharest;
- Ph.D. Eng. BUȚU Alina - Romania, INSB Bucharest;
- Prof. Ph.D. Eng. PARASCHIV Gigel - Romania, P.U. Bucharest;
- Prof. Ph.D.Eng. BIRIȘ Sorin - Romania, P.U. Bucharest;
- Prof. Ph.D. Eng. VLASE Sorin - Romania, "Transilvania" University Brașov;
- Prof. Ph.D.Eng. BURNETE Nicolae - Romania, Technical University Cluj Napoca;
- Prof. Ph.D. Eng. FILIP Nicolae - Romania, Technical University Cluj Napoca;
- Prof. Ph.D. Eng. VOICU Gheorghe - Romania, P.U. Bucharest;
- Prof. Ph.D. Eng. GERGEN Iosif -Romania,USAMVB Timișoara;
- Prof. Ph.D. Eng. ȚENU Ioan - Romania, USAMV Iași;
- Assoc.Prof.Ph.D.Eng. BUNGESCU Sorin - Romania, USAMVB Timișoara;
- Prof. Ph.D.Eng. FENYVESI László - Hungary, Hungarian Institute of Agricultural Engineering Godolo;
- Assist.Prof.Ph.D.Eng. BILANDZIJA Nikola - Croatia, University of Zagreb;
- Ph.D. BIOCCA Marcello - Italy Agricultural Research Council, Agricultural Engineering Research Unit;
- Prof.Ph.D.Eng. MIHAILOV Nikolay - Bulgaria, University of Rousse;
- Assoc.Prof.Ph.D.Eng. ATANASOV At. - Bulgaria, University of Rousse;
- Assoc.Prof. Ph.D. ERTEKIN Can - Turkey, Akdeniz University Antalya;
- Prof. Ph.D.Sc. Eng. VARTUKAPTEINIS Kaspars - Latvia, Latvia University of Agriculture, Institute of Agricultural Machinery;
- ir. HUYGHEBAERT Bruno - Belgium, Walloon Agricultural Research Center CRA-W;
- Prof.Ph.D. Eng. FABBRO Dal Inacio Maria - Brazil, Campinas State University;
- Prof. Ph.D. Eng. DE WRACHIEN Daniele - Italy, State University of Milan;
- Prof. Ph.D.Guanxin YAO - P.R.China, Along Agriculture R&DTechnology and Management Consulting Co., Ltd;
- Prof. Ph.D. Eng. GONZÁLEZ Omar - Republic of Cuba, Central University "Marta Abreu" de las Villas;
- Assist. Prof.Dr. KABAŞ Önder –Turkey, Akdeniz University.
- Asist.Prof.Dr. SELVİ Kemal Çağatay - Turkey, Ondokuz Mayıs University.

In the present, *INMATEH - Agricultural Engineering* journal is indexed in the next international databases:
 ELSEVIER /SciVerse SCOPUS, CLARIVATE ANALYTICS' WEB OF SCIENCE- Emerging Sources Citation Index (ESCI),
 ULRICHS Web: Global Serials Directory, CABI, SCPIO, Index COPERNICUS International,
 EBSCO Publishing, Elektronische Zeitschriftenbibliothek

INMATEH - Agricultural Engineering**vol. 56, no.3 / 2018**

NATIONAL INSTITUTE OF RESEARCH-DEVELOPMENT FOR MACHINES AND
 INSTALLATIONS DESIGNED TO AGRICULTURE AND FOOD INDUSTRY -
 INMA Bucharest

6 Ion Ionescu de la Brad Blvd., sector 1, Bucharest

Three issues per year,
 e-ISSN: 2068 – 2239
 p ISSN: 2068 – 4215

Edited by: INMA Bucharest

Copyright: INMA Bucharest / Romania

CONTENT

		Page(s)
1.	<p>EXPERIMENTAL RESEARCH ON THE MOVEMENT STABILITY OF A PLOUGHING AGGREGATE, COMPOSED ACCORDING TO THE “PUSH-PULL” SCHEME / PĚC «PUSH-PULL» SHĚMAS KOMPLEKTĚTA ARŠANAS AGREGĀTA KUSTĪBAS STABILITĀTES EKSPERIMENTĀLS PĒTĪJUMS</p> <p>Ph.D. Ivanovs S.¹⁾, Prof.PhD. Bulgakov V.²⁾, Prof.PhD. Adamchuk V.³⁾, Prof.PhD. Kyurchev V.⁴⁾, Prof.PhD. Kuvachov V.⁴⁾</p> <p>¹⁾Latvia University of Agriculture / Latvia; ²⁾National University of Life and Environmental Sciences of Ukraine / Ukraine; ³⁾National Scientific Centre “Institute for Agricultural Engineering and Electrification” / Ukraine; ⁴⁾Tavria State Agrotechnological University / Ukraine</p>	9
2.	<p>RESEARCH ON THE VIBRATION OF MINI TILLER / 微耕机的振动研究</p> <p>Ph.D. Eng. Liang X.C. [*], Prof. Ph.D. Chen J., Ms.Stud. Eng. Wang Z. Southwest University, College of Engineering and Technology, Chongqing Key Laboratory of Agricultural Equipment for Hilly and Mountainous Regions / P. R. China</p>	17
3.	<p>ANALYSIS OF THE WORKS PERFORMED BY PNEUMATIC AND MECHANICAL SEEDING DEVICE WITHOUT USING VACUUM / АНАЛІЗ РОБОТИ ПНЕВМОМЕХАНІЧНОГО ВИСІВНОГО АПАРАТА БЕЗ ВИКОРИСТАННЯ ВАКУУМУ</p> <p>Lect. Ph.D. Eng. Vasytkovska K.V., Lect. Ph.D. Eng. Vasytkovskyi O.M., Prof. Ph.D. Eng. Sviren M.O., Lect. Ph.D. Agric. Kulik G.A. Central Ukrainian National Technical University / Ukraine</p>	25
4.	<p>PRODUCTION TESTS OF A SEED DRILL CPH 2000 FOR DIRECT SOWING / ESSAIS AU CHAMP D’UN SEMOIR CPH 2000 POUR LE SEMIS DIRECT</p> <p>Warouma Arifa¹⁾, Haidenko Oleh²⁾</p> <p>¹⁾Dan Dicko Dan Koulodo University of Maradi, Niger Republic ²⁾Institute of Steppe Agriculture of the National Academy of Agrarian Sciences of Ukraine</p>	31
5.	<p>RESEARCH ON THE RATIONAL REGIMES OF WHEAT SEEDS DRYING / ДОСЛІДЖЕННЯ РАЦІОНАЛЬНИХ РЕЖИМІВ СУШІННЯ НАСІННЯ ПШЕНИЦІ</p> <p>Assoc. Prof.Ph.D.Eng. Paziuk V.M.¹⁾, Assoc. Prof. Ph.D. Eng. Liubin M.V. ²⁾, Assoc. Prof. Ph.D. Eng. Yaropud V.M. ²⁾, Assoc. Prof. Ph.D. Eng. Tokarchuk O.A. ²⁾, Assoc. Prof. Ph.D. Eng. Tokarchuk D.M. ²⁾</p> <p>¹⁾Institute of technical thermal physics NAS of Ukraine ²⁾Vinnitsa National Agrarian University / Ukraine</p>	39
6.	<p>AN ANALYSIS OF EIGHT TILLAGE METHODS IN A SILTY-CLAY SOIL: PROPOSAL FOR FLEXIBLE TILLAGE CYCLES / ANALISI DI OTTO METODI DI LAVORAZIONE DI TERRENI LIMO-ARGILLOSI: PROPOSTA DI CICLI FLESSIBILI DI LAVORAZIONE</p> <p>Fanigliulo R., Biocca M., Pochi D. Consiglio per la ricerca in agricoltura e l'analisi dell'economia agraria (CREA), Centro di ricerca Ingegneria e Trasformazioni agroalimentari (Research Centre for Engineering and Agro-Food Processing), Monterotondo (Rome), Italy</p>	49
7.	<p>TECHNIQUE FOR CALCULATING THE RESULTANT FORCE AND MOMENT OF SOIL RESISTANCE TO CUTTING BY BLADE OF ROTARY TILLAGE TOOL / МЕТОДИКА РАСЧЕТА РЕЗУЛЬТИРУЮЩЕЙ СИЛЫ И МОМЕНТА СОПРОТИВЛЕНИЯ ПОЧВЫ РЕЗАНИЮ ЛЕЗВИЕМ ЛОПАСТНОГО РОТАЦИОННОГО РАБОЧЕГО ОРГАНА</p> <p>Prof. Ph.D. Eng. Sc. Akimov A.P.[*], Asst. Prof. Ph.D. Eng. Sc. Konstantinov Y.V., Asst. Prof. Ph.D. Stepanov A.V. Chuvash State Agricultural Academy / Russia</p>	59
8.	<p>NUMERIC MODEL OF THE GRAIN MIXTURE FLOW IN A CYLINDRICAL SIEVE WHICH REVOLVES AROUND THE INCLINED AXIS / ДОСЛІДЖЕННЯ РУХУ ЗЕРНОВОЇ СУМІШІ В ЦИЛІНДРИЧНОМУ РЕШЕТІ, ЩО ОБЕРТАЄТЬСЯ НАВКОЛО НАХИЛЕНОЇ ОСІ</p> <p>Lect. Ph.D.Eng. Naumenko M., Lect. Ph.D.Eng. Sokol S., Lect. Ph.D. Eng. Filipenko D., Lect. Ph.D. Eng.Guridova V., Prof. Ph.D. Agri.Sci. Kharytonov M. Dnipro State Agrarian and Economics University, Faculty of Agrarian Engineering / Ukraine</p>	67
9.	<p>RESEARCHES ON THE MONITORING OF AIR PRESSURE IN THE TIRES AT ROAD TRANSPORT MEANS / CERCETARI PRIVIND MONITORIZAREA PRESIUNII AERULUI DIN PNEURI LA MIJLOACELE DE TRANSPORT RUTIERE</p> <p>Ph.D. Eng. Ciupercă R., Ph.D. Stud. Eng. Persu C., Ph.D. Eng. Nedelcu A., Ph.D. Eng. Popa L., Ph.D. Stud. Eng. Zaica A., Ph.D. Stud. Eng. Ștefan V. National Institute of Research-Development for Machines and Installations designed to Agriculture and Food Industry – INMA, Bucharest / Romania</p>	75

		Page(s)
10.	<p>RESEARCHES REGARDING THE OPTIMIZATION OF IMPURITIES REMOVAL TECHNOLOGY FROM THE CEREAL AND INDUSTRIAL PLANT SEEDS FOR ESTABLISHING ECOLOGICAL CROPS / CERCETĂRI PRIVIND OPTIMIZAREA TEHNOLOGIEI DE ELIMINARE A IMPURITĂȚILOR DIN MASA DE SEMINȚE DE CEREALE ȘI PLANTE TEHNICE DESTINATE ÎNFIINȚĂRII CULTURILOR ECOLOGICE</p> <p>Ph.D. Eng. Păun A.¹⁾, Eng. Stroescu Gh.¹⁾, Ph.D. Eng. Vișan A.L.¹⁾, Ph.D. Eng. Olan M.¹⁾, Ph.D. Stud. Eng. Zaica Alexandru¹⁾, Lect.Ph.D.Eng. Moiceanu G.²⁾</p> <p>¹⁾ National Institute of Research-Development for Machines and Installations designed to Agriculture and Food Industry – INMA, Bucharest / Romania; ²⁾ Politehnica University of Bucharest / Romania</p>	83
11.	<p>RESEARCH OF YELLOW-FEATHER CHICKEN BREEDING MODEL BASED ON SMALL CHICKEN CHAMBER / 基于小型鸡舍的黄羽鸡精细化养殖模式研究</p> <p>MAE. Stud. Heyang Yao¹⁾, Ms. Qiyue Sun¹⁾, Assoc. Prof. Ph.D. Xiuguo Zou^{*1)}, MEE. Stud. Siyu Wang²⁾, Senior Exper. Shixiu Zhang¹⁾, MAE. Stud. Shikai Zhang¹⁾, Ms. Shuyue Zhang¹⁾</p> <p>¹⁾ College of Engineering, Nanjing Agricultural University / China; ²⁾ School of environmental science and Engineering, Nanjing University of Information Science and Technology / China</p>	91
12.	<p>RESEARCH ON TEMPERATURE PREPARATION OF DIESEL BIOFUEL IN AN ENERGY VEHICLE FUEL TANK / ДОСЛІДЖЕННЯ ТЕМПЕРАТУРНОЇ ПІДГОТОВКИ ДИЗЕЛЬНОГО БІОПАЛИВА В ПАЛИВНОМУ БАКУ ЕНЕРГОЗАСОБУ</p> <p>Prof.D.Sc. Golub G.A.¹⁾, Ph.D. Eng. Chuba V.V.¹⁾, Ph.D. Eng. Kepko O.I.^{*2)}</p> <p>¹⁾National University of Life and Environmental Sciences of Ukraine, Kyiv / Ukraine; ²⁾Uman National University of Horticulture, Uman / Ukraine</p>	10 1
13.	<p>NUMERICAL ANALYSES OF AIR VELOCITY AND TEMPERATURE DISTRIBUTION IN POULTRY HOUSE USING COMPUTATIONAL FLUID DYNAMICS</p> <p>آنالیز عددی توزیع سرعت و دما در مرغداری با استفاده از دینامیک سیالات محاسباتی</p> <p>Ph.D. Stud. Eng. Pourvosoghi N¹⁾, Assoc.Prof. Ph.D. Eng. Nikbakht A.M.^{*1)}, Assoc.Prof. Ph.D. Eng. Sharifian F.¹⁾, Assist.Prof. Ph.D. Eng. Najafi R.²⁾</p> <p>¹⁾Department of Mechanical Engineering of Biosystems, Urmia University / Iran ²⁾Department of Animal Science, Urmia University / Iran</p>	10 9
14.	<p>RESEARCH ON SUNFLOWER SEEDS SEPARATION BY AIRFLOW / ДОСЛІДЖЕННЯ ПРОЦЕСУ СЕПАРАЦІЇ НАСІННЯ СОЛЯШНИКУ ПІД ДІЄЮ ПОВІТРЯНОГО ПОТОКУ</p> <p>Ph.D. Aliev E.B.¹⁾, Ph.D. Yaropud V.M.²⁾, Ph.D. Dudin V.Yr.³⁾, Ph.D. Pryshliak V.M.²⁾, Ph.D. Pryshliak N.V.²⁾, Ph.D. Ivlev V. V.³⁾</p> <p>¹⁾Institute of Oilseed Crops NAAS, Zaporizhzhia / Ukraine, ²⁾Vinnitsa National Agrarian University / Ukraine ³⁾ Dnipro State Agrarian and Economic University / Ukraine</p>	11 9
15.	<p>DESIGN OF SHAPED-HOLE VOLUME-VARIABLE PRECISION SEEDER / 变容量型孔轮式排种器设计</p> <p>Lect. Ph.D. Jiaxin Zheng¹⁾, M.S. Yanyu Gao¹⁾, Lect. Ph.D. Hongfang Yuan²⁾, Lect. Ph.D. Rong Chen^{*1)}</p> <p>¹⁾ School of Mechanical and Electrical Engineering, Yunnan Agricultural University, Kunming /China; ²⁾ Key Laboratory of Bionics Engineering, Ministry of Education, Jilin University, Changchun / China</p>	12 9
16.	<p>RESEARCH AND DEVELOPMENT OF AIR-SUCTION CORN PRECISION SEED METERING DEVICE / 气吸式精量玉米播种器的研究与开发</p> <p>Prof. Ph.D. Eng. Lv Xiaorong^{*1)}, Prof. Ph.D. Eng. Zhang Lihua¹⁾, Ph.D. Eng. Lv Xiaolian²⁾, M.A. Stud. Eng. Tian Zhiwei¹⁾</p> <p>¹⁾ Sichuan Agricultural University, College of Machinery & Electronics / China; ²⁾ Chuzhou University, College of Machinery & Automotive Engineering / China</p>	13 7
17.	<p>DESIGN AND EXPERIMENTAL STUDY OF THE FINGER-TYPE LIFTER TEST BENCH FOR <i>Cerasus humilis</i> BRANCHES / 拨指式钙果扶禾试验台的设计与试验</p> <p>As. M.S. Stud. Eng. Yongqiang He, Prof. Ph.D. Eng. Junlin He[*], Ph.D. Stud. Eng. Xiaobin Du, M.S. Stud. Eng. Dawei Fang</p> <p>College of Engineering, Shanxi Agriculture University, Taigu / China</p>	14 7
18.	<p>DESIGN AND TEST ON CONTROL SYSTEM OF AUTOMATIC SEEDLING FEEDING MECHANISM FOR TRANSPLANTING MACHINE / 移栽机自动送苗机构控制系统设计和试验</p> <p>As. Ph.D. Stud. Eng. Yong Zhang^{1,2)}, A/Prof. Ph.D. Eng. KaiXing Zhang^{*1)}, M.S. Stud. Eng. Chao Song¹⁾, Prof. Ph.D. Eng. XianXi Liu.¹⁾, Prof. Ph.D. Eng. ZhengHe Song³⁾</p> <p>¹⁾ College of Mechanical and Electrical Engineering, Shandong Agricultural University, Taian / China; ²⁾ School of Information And Electronic Engineering, Shandong Technology and Business University, Yantai / China; ³⁾ College of Engineering, China Agricultural University, Beijing / China</p>	155
19.	<p>THE EFFECT OF POTATOES' COMPRESSIVE MECHANICAL PROPERTIES UNDER DIFFERENT MOISTURE CONTENTS: AN EXPERIMENTAL STUDY / 不同含水率下马铃薯压缩力学特性影响的试验研究</p> <p>Ph.D. Yu Fan^{1,2)}, A. Prof. Ph.D. Ping Zhao^{*1)}, Prof. Ph.D. Lichun Qiu¹⁾, M.S. Jizhe Zhao¹⁾</p> <p>¹⁾ Agricultural University of Shenyang, Shenyang 110886, China ²⁾ Heilongjiang Agricultural Economy Vocational College, Mudanjiang / China</p>	165

		Page(s)
20.	<p>THE INFLUENCE OF BULK MATERIAL FLOW ON TECHNICAL AND ECONOMICAL PERFORMANCE OF A SCREW CONVEYOR / ВПЛИВ ПОТОКУ СИПКОГО МАТЕРІАЛУ НА ТЕХНІКО-ЕКОНОМІЧНІ ПОКАЗНИКИ РОБОТИ ГВИНТОВОГО КОНВЕЄРА</p> <p>Prof. Ph.D. Eng. Hevko R.B.¹⁾, Prof. Ph.D. Eng. Baranovsky V.M.²⁾, Prof. Ph.D. Eng. Lyashuk O.L.,²⁾ Prof. Ph.D. Eng. Pohrishchuk B.V.¹⁾ Assoc. Prof. Ph.D. Eng. Gumeniuk Y.P.¹⁾ Assoc. Ph.D. Eng. Klendii O.M.,³⁾ Assoc. Ph.D. Eng. Dobizha N.V.¹⁾</p> <p>¹⁾Ternopil National Economical University / Ukraine; ²⁾Ternopil Ivan Puluj National Technical University ³⁾Separated Subdivision of National University of Life and Environmental Sciences of Ukraine, Berezhany Agrotechnical Institute / Ukraine</p>	175
21.	<p>THE NUMERICAL SIMULATION OF HYDRODYNAMICS AND MASS TRANSFER PROCESSES FOR VENTILATING SYSTEM EFFECTIVE LOCATION / ЧИСЕЛЬНЕ ДОСЛІДЖЕННЯ ГІДРОДИНАМІКИ І ТЕПЛОПЕРЕНОСУ У ПТАШНИКУ ДЛЯ ЕФЕКТИВНОГО РОЗМІЩЕННЯ ВЕНТИЛЯЦІЙНОГО ОБЛАДНАННЯ</p> <p>Prof. Ph.D. Eng. Gorobets V.G.¹⁾, Senior lecturer Ph.D. Eng. Trokhaniak V.I.¹⁾, Assoc. Prof. Ph.D. Eng. Rogovskii I.L.¹⁾, Senior lecturer Ph.D. Eng. Titova L.L.¹⁾, Senior lecturer Ph.D. Eng. Lendiel T.I.¹⁾, Assoc. Prof. Ph.D. Eng. Dudnyk A.O.¹⁾, PhD student Masiuk M.Yu.¹⁾</p> <p>¹⁾ National University of Life and Environmental Sciences of Ukraine / Ukraine</p>	185
22.	<p>STUDY ON NDVI OPTIMIZATION OF CORN VARIABLE FERTILIZER APPLICATOR / 变量施肥机 NDVI 的优化研究</p> <p>Ph.D. Hongli Liu¹⁾, Prof. Xi Wang²⁾, M.S. Jin Bing-kun²⁾</p> <p>¹⁾ College of Engineering, Heilongjiang Bayi Agricultural University, Daqing/China; ²⁾ Western University, 1151 Richmond Street, London, Ontario / Canada</p>	193
23.	<p>EFFECT OF PRE-SOAKING AND GRAIN SHAPE ON COOKING ENERGY OF PARBOILED AND RAW RICE / තම්බන ලද සහ කැකුළු සහල් ඇටවල භාවය හා පිසීමට කලින් පෙනවීම සහල් පිසීමේ ශක්ති පරිභෝජනය මත බලපෑම</p> <p>K. G. Gunasekara ¹⁾, D. A. N. Dharmasena ²⁾ and F. H. C. A. Silva ²⁾</p> <p>¹⁾ Postgraduate Institute of Agriculture, University of Peradeniya, Peradeniya, Sri Lanka ²⁾ Department of Agricultural Engineering, Faculty of Agriculture, University of Peradeniya, Sri Lanka</p>	203
24.	<p>DETECTION AND CLASSIFICATION OF BRUISES IN "RED DELICIOUS" APPLE FRUITS BY APPLYING PIEZOELECTRIC TRANSDUCERS / تشخیص و طبقه‌بندی کوفتگی سیب "رد دلشیز" با استفاده از ترانس‌دیوسرهای پیزوالکتریک</p> <p>Ph.D. Stud. Mehrdad Foj Laley¹⁾, Assoc. Prof. Parviz Ahmadi Moghadam¹⁾, As Prof. Ali Hasanpour¹⁾, As prof. Vahid Rostampour¹⁾</p> <p>¹⁾ Department of Mechanical Engineering of Biosystems, Urmia University, Urmia / Iran</p>	211

RESEARCH ON SUNFLOWER SEEDS SEPARATION BY AIRFLOW

/

ДОСЛІДЖЕННЯ ПРОЦЕСУ СЕПАРАЦІЇ НАСІННЯ СОНЯШНИКУ ПІД ДІЄЮ ПОВІТРЯНОГО ПОТОКУ

Ph.D. Aliev E.B.¹⁾, Ph.D. Yaropud V.M.²⁾, Ph.D. Dudin V.Yr.³⁾,
Ph.D. Pryshliak V.M.²⁾, Ph.D. Pryshliak N.V.²⁾, Ph.D. Ivlev V. V.³⁾

¹⁾Institute of Oilseed Crops NAAS, Zaporizhzhia / Ukraine,

²⁾Vinnitsa National Agrarian University / Ukraine, ³⁾ Dnipro State Agrarian and Economic University / Ukraine

Tel: +380688614437; E-mail: aliev@meta.ua

Keywords: seeds, sunflower, separation, air, flow, modeling

ABSTRACT

Investigation of the process of sunflower seeds separation during its movement under the influence of air flow has been carried out in two stages. The first (theoretical) stage is implemented in the software package STAR-CCM+ using the corresponding physical models. The second stage has been made to carry out the experimental research on the installation with the base of the aerodynamic separator of the "Almaz" series. The results of numerical simulation and experimental researches of the sunflower seed separation process during its movement in the airflow are presented. As a result of numerical simulation and experimental studies of the mechanical and technological process of sunflower seeds separation during movement under the influence of air flow, there has been developed the dependences of the distribution of each seed fraction on the length of the area (average value, average square deviation, filling factor, distribution coefficient) and the consumed power from the seed effective diameter, air flow velocity and the seed supply. Statistical analysis has showed that the correlation coefficient between the theoretical and experimental dependencies in the variation of the factors' values in the given range is 0.96. During the research, a compromising problem was solved, namely, there had been reached minimization of consumed power at the maximum value of the distribution coefficient and the seed supply.

РЕЗЮМЕ

Дослідження процесу сепарації насіння соняшнику при його переміщенні під дією повітряного потоку проводились в два етапи. Перший (теоретичний) етап реалізовано в програмному пакеті STAR-CCM+ з використанням відповідних фізичних моделей. Другим етапом було проведення експериментальних досліджень на установці із базою аеродинамічного сепаратора серії «Алмаз». Представлені результати чисельного моделювання і експериментальних досліджень процесу сепарації насіння соняшнику при його переміщенні під дією повітряного потоку. В результаті чисельного моделювання і експериментальних досліджень механіко-технологічного процесу сепарації насіння соняшнику при його переміщенні під дією повітряного потоку отримані залежності розподілу кожної фракції насіння по довжині області (середнє значення, середньоквадратичне відхилення, коефіцієнт заповнення, коефіцієнт розподілу) і споживану потужність від ефективного діаметра насінини, швидкості подачі повітря та подачі насіння. Статистичний аналіз показав, що коефіцієнт кореляції між теоретичною і експериментальною залежностями при варіюванні значеннями факторів в заданому діапазоні складає 0,96. В процесі досліджень була вирішена компромісна задача, а саме мінімізація споживаємої потужності при максимальному значенні коефіцієнта розподілу і подачі насіння.

INTRODUCTION

The unsatisfactory quality of sunflower seeds results in a significant reduction in agricultural productivity and a high over expending of seed material (Zaika P., 2006). According to the current standards, oilseed crop varieties and crop yields are determined mainly by their varietal purity, which should equal 99.6-99.9% for the elite seed (elite, superelite) - depending on the crop (Aliev E., 2016).

The task of separating sunflower seeds by density (specific weight, texture) is reduced to its previous calibration by geometric dimensions (Tishchenko L., Olshansky V., Olshansky S., 2010). In other words, there are two variables: sailing and density. It is obvious that at the seed with same density and smaller mass flies further under the air flow influence, than seeds of greater mass that fly shorter distances.

In addition, depending on the orientation of the seed to the vector of the air flow velocity, the sailing range appears, which leads to a random trajectory of the movement of seeds (Nurullin E., Salakhov I., Dmitriev A., 2014). Of course, within the long-term airflow impact, the seed will take the best aerodynamic position in which the lowest resistance is observed (Aliiev E., Shevchenko I., 2017).

In addition to the above, the air flow must have a uniform structure, in terms of the turbulence parameters (scale and intensity), and on the speed diagram (Aliiev E., Yaropud V., 2017).

Considering all the difficulties of the task, the process of sunflower seeds separation during their movement under the air flow influence must be theoretically and experimentally explored.

MATERIALS AND METHODS

Investigation of the process of sunflower seeds separation during their movement under the influence of air flow has been carried out in two stages.

The first (theoretical) stage is implemented in the software package STAR-CCM+ using the corresponding physical models. The initial positions and velocities of sunflower seeds and the air flow have been determined using the finite element method. Then, based on this initial data, given physical laws of contact interaction, the forces acting on each seed at each interval of time have been calculated. For each seed, the resulting force has been calculated and the Cauchy problem has also been solved on the selected time interval, the result of which is the initial data for the next step. The following physical models have been selected for numerical modeling: k-ε disturbed flow turbulence model, gravity field, Van der Waals real gas model, discrete element model, multiphase interaction model (Aliiev E., Bandura V., Pryshliak V., Yaropud V., Trukhanska O., 2018). The method of discrete elements is based on the laws of conservation of impulse and impulse momentum for Lagrangian models of a multiphase environment. However, to construct a physico-mathematical model, one must assume that the seeds are represented in the form of identical ellipsoids with a defined density and effective diameter.

According to previous researches of physical and mechanical properties of Prometheus variety sunflower seeds, selected by the Institute of Oilseeds of NAAS, (Burenko K., Vedmedeva E., Pershin A., 2012; Aliiev E., Shevchenko I., 2017; Aliiev E., Yaropud V., 2017) the following averaged values were adopted for numerical modeling: Poisson's coefficient – 0.5; Young's modulus – 0.2 MPa; density – 200-1000 kg/m³; coefficient of friction of rest – 0.8; normal recovery factor – 0.5; tangential recovery factor – 0.5; coefficient of rolling resistance – 0.3. Properties of the environment have been fixed as follows: environment – air; dynamic viscosity – 1.85508·10⁻⁵ Pa·s; Prandtl's turbulent number – 0.9; free fall acceleration – 9.8 m/s²; temperature – 293 K; pressure – 101325 Pa. The size of the grid cell modeling is 0.001 m. The exposure is from 3 to 7 s.

For the implementation of numerical simulation, a computational scheme of sunflower seed separation process has been made when it was moved under the air flow influence (Fig. 1).

For the factors of numerical modeling, the following most important technological parameters have been adopted: seed effective diameter D_p , air supply rate V , seeding Q .

The effective diameter of sunflower seed D_p was determined by the formula

$$D_p = \sqrt[3]{l_x \cdot l_y \cdot l_z} \quad (1)$$

where: l_x , l_y , l_z – length, width and thickness of sunflower seed, respectively, mm.

According to researches (Vedmedeva K., Makhova T., Kirpichova N., 2017), the geometric dimensions of sunflower seed are $l_x = 8-15$ mm, $l_y = 3-8$ mm, $l_z = 2-4$ mm, so it can be stated, that the effective diameter of sunflower seeds D_p varies in the range of 3-7 mm. Due to the fact that the seeds can be integral, partial and empty, then, according to researches (Vedmedeva K., Makhova T., Karpychova N., 2017), their density can vary in the range of 200-1000 kg/m³. Therefore, the seed flow has been represented by 5 fractions, the weight of 1000 seeds of each being presented in Table 1.

Table 1

Weight of 1000 seeds for a determined effective diameter m_{1000} , g					
Effective diameter of seed D_p , mm	Seeds density ρ , kg/m ³				
	200	400	600	800	1000
3	3	6	9	12	15
5	13	26	39	52	65
7	36	72	108	144	180

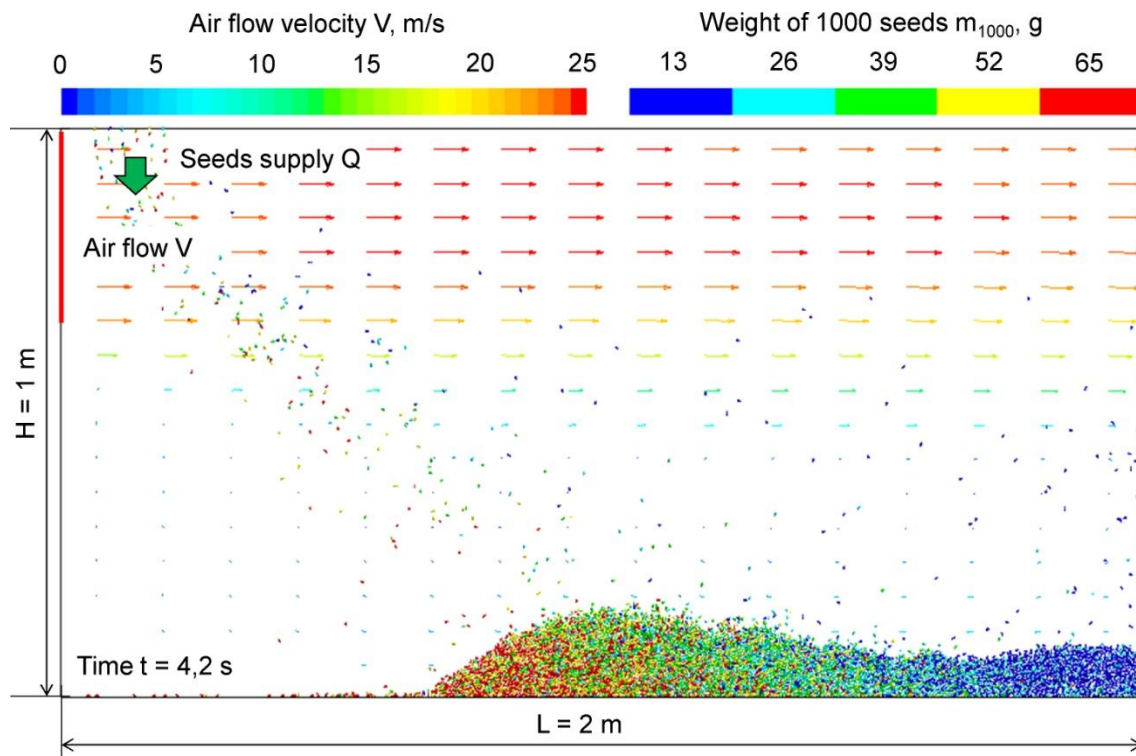


Fig. 1 – Scheme of numerical simulation of the sunflower seed separation process during its movement under the air flow influence

Numerical simulation has been conducted on a complete factorial study with a total number of experiments – $3^3 = 27$. The numerical modeling factors variation boundaries are presented in Table 2 based on the previous studies (Aliev E., 2017).

Table 2

Factors variations levels in numerical simulation of the seeds movement in the air flow

Factors variations level	Factors		
	Seeds' effective diameter D_p , mm	Seeds supply Q , kg/s	Air flow velocity V , m/s
Top level (+)	7	0.09	25
Base level (0)	5	0.06	20
Low level (-)	3	0.03	15
Factors variations interval	2	0.03	5

As a result of the seeds separation under the air flow influence, the distribution of each fraction along the length of the area can be represented by a normal distribution with a defined value and a value deviation σ (fig. 2). For a normal distribution in the area, a probability of 95.45 % is observed.

According to fig. 2, the best separation (95.45 %) is achieved with the condition:

$$2\sigma_1 + 2(2\sigma_2 + 2\sigma_3 + 2\sigma_4) + 2\sigma_5 \leq \bar{x}_5 - \bar{x}_1 \tag{2}$$

or

$$\theta = \frac{\bar{x}_5 - \bar{x}_1}{2\sigma_1 + 2(2\sigma_2 + 2\sigma_3 + 2\sigma_4) + 2\sigma_5} \rightarrow \max \tag{3}$$

where: θ – filling factor.

It should be noted that the entire area has been divided into 20 identical vertical zones, each of which determines the amount of seeds in each fraction.

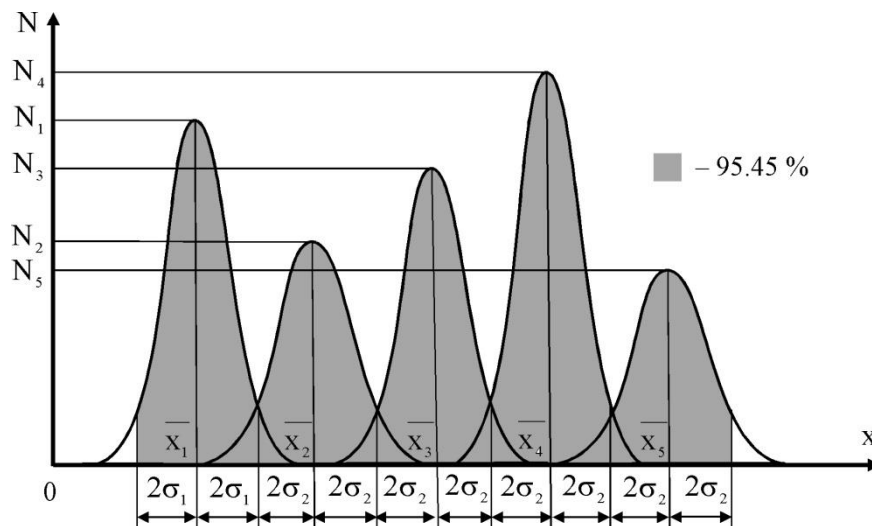


Fig. 2 – Functions of normal distribution of each fraction by area length

The fill factor θ , mentioned before, means values of the fractions distributions in length and their square deviations σ characterize the size and location of the gathering areas (samplings). However, in existing aerodynamic separators, preservatives of the same size are used, which complicates the assessment of the separation process quality. Therefore, another criterion for the quality of fractions distribution in the receptacles is introduced – the distribution coefficient δ , which is defined as follows. Let the input material be divided into N fractions, then the number of gatherable areas should be N . For each fringe area, the fractional composition of the seed mixture is determined, which can be mathematically represented in the form of a square matrix $N \times N$:

$$\begin{pmatrix} w_{11} & w_{12} & \dots & w_{1N} \\ w_{21} & w_{22} & \dots & w_{2N} \\ \dots & \dots & \dots & \dots \\ w_{N1} & w_{N2} & \dots & w_{NN} \end{pmatrix} \quad (4)$$

where: w_{ij} – mass fraction of fraction i in the collection j :

$$w_{ij} = \frac{m_{ij}}{\sum_{i=1}^N \sum_{j=1}^N m_{ij}} \cdot 100\% \quad (5)$$

m_{ij} is the mass of fraction i in the collection j .

The distribution coefficient δ is defined as the largest sum of the diagonal elements of the matrix (4):

$$\delta = \max \left(\sum_{k=1}^N w_{kk}, \sum_{k=1}^N w_{k(k+1)}, \dots, \sum_{k=1}^N w_{k(k+N-1)}, \sum_{k=1}^N w_{(k+1)k}, \dots, \sum_{k=1}^N w_{(k+N-1)k} \right) \quad (6)$$

where: k is a natural number.

The second stage has been made to carry out the experimental research on the installation with the base of the aerodynamic separator of the "Almaz" series (produced by the PE PF "Agrotech"), consisting of a bunker 1 for loading seed material to be separated from a vibroplate 2, generator of air jet cascades 3, which is installed below it and connected to the pressures air flow source 4 into generator 3 and separation chamber 5. Under the separation chamber 5 are the collections of fractions 6 (I-IV). A collection of dust and light fraction 7 (V) was mounted at the end of the separation chamber 5. The design and technological scheme and the general view of the experimental installation are presented in Fig. 3. To ensure a certain supply of seeds, a calibrated valve 8 is used to limit input performance. The specified air supply is set using the 9 (Danfoss VLT Micro Drive) frequency converter, and controlled using the anemometer 10 (Benetech GM-816).

The source material during the experimental researches was represented by sunflower seeds of the Prometheus variety, selection of the Institute of Oilseed Crops NAAS, which were calibrated to a fraction of 3.2-3.4 mm. One experiment was conducted by passing through a pilot sample of a supply unit of 100 kg of seeds.

Factors for experimental studies are the air supply rate V and the supply of seed Q . The intervals and levels of variation by these factors coincide with the theoretical ones (Table 1).

As optimization criteria were adopted: power consumption – P , kW and distribution coefficient – δ . The power consumed by the fan drive is measured using one of the additional functions of the Danfoss VLT Micro Drive frequency converter. Since the task of separating sunflower seeds during its movement under the influence of air flow is the division into 5 fractions (integral, partial, naked core, empty and dust), then at the experimental installation exposed 5 fence regions. For each experiment, for each fringe area, fraction composition is determined according to the generally accepted methodology (GOST 10854-88, 2010) and the corresponding distribution coefficient δ is calculated according to the formula (6).

Experimental studies have been conducted on the D -optimal second-order Boxing-Benkin plan for 2 factors (9 trials) in a three-time repetition. The processing of the research results has been carried out by the mathematical factor planning of experiments method, using the Mathematica software package. The mathematical model is determined by one optimization criterion.

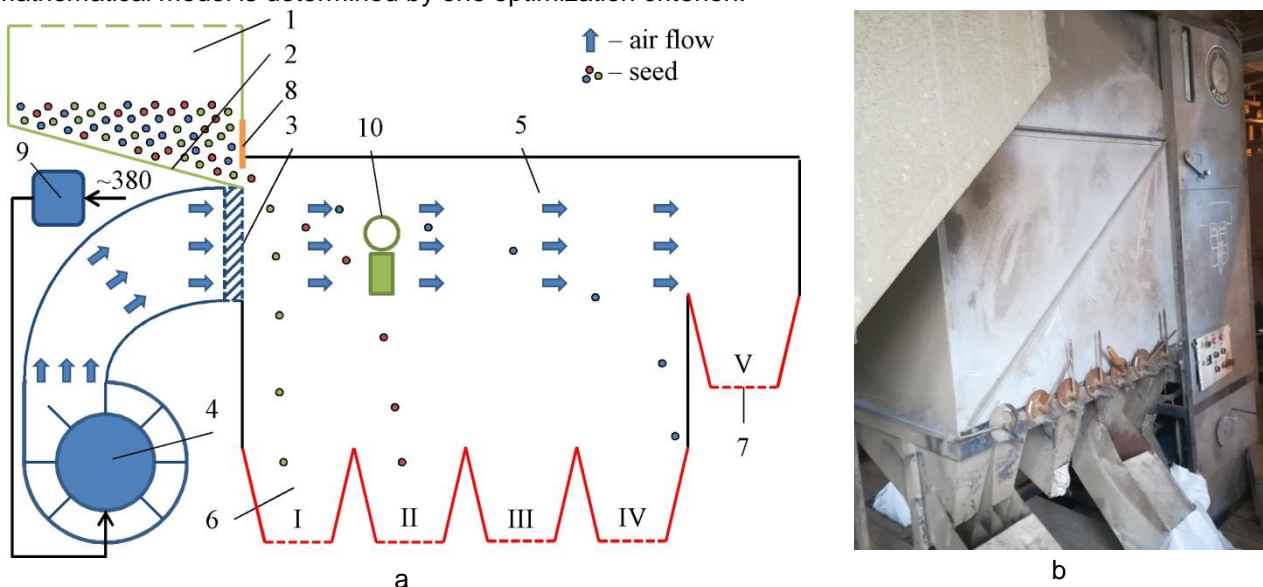


Fig. 3 – Structural-technological scheme (a) and general view (b) of an experimental plant for studying the process of sunflower seeds separation when they are displaced by airflow

1 – bunker; 2 – vibroplate; 3 – air jets oscillator; 4 – fan; 5 – separation chamber; 6 – collections of fractions; 7 – dust collector and light fraction; 8 – valve; 9 – frequency converter 10 – anemometer

RESULTS

According to the first stage, as a result of numerical simulation, a visualization of the technological process of sunflower seeds separation was obtained when they were displaced under the influence of air flow (fig. 4).

The average value and the average square deviation σ have been calculated for each experiment, for each fraction of seeds accordingly. According to the data obtained by formula (3), the filling factor θ is calculated. Using Mathematica software package, a mathematical expression is compiled in a skilled form after the reduction of non-significant parts of the equation according to Student's criterion, which links the coefficient of filling θ with the research factors:

$$\theta = 0.658343 - 0.065448 D_p - 0.00711689 D_p^2 - 4.31791 Q + 0.00181584 V + 0.00683085 D_p V + 0.159939 QV - 0.00138784 V^2 \quad (7)$$

The graphical interpretation of the dependence (7) is shown in Fig. 5. The optimum parameters of equation (7) under the condition of the maximum filling factor θ are $D_p = 3$ mm, $Q = 0.03$ kg/s, $V = 15$ m/s. As it can be seen from Fig. 5: with the increase of the seed diameter D_p , the fill factor θ decreases by parabola; with an increase in the seeds supply Q , the fill factor θ decreases linearly; and for the air flow velocity $V = 15$ m/s, the optimal value of the fill factor θ is present.

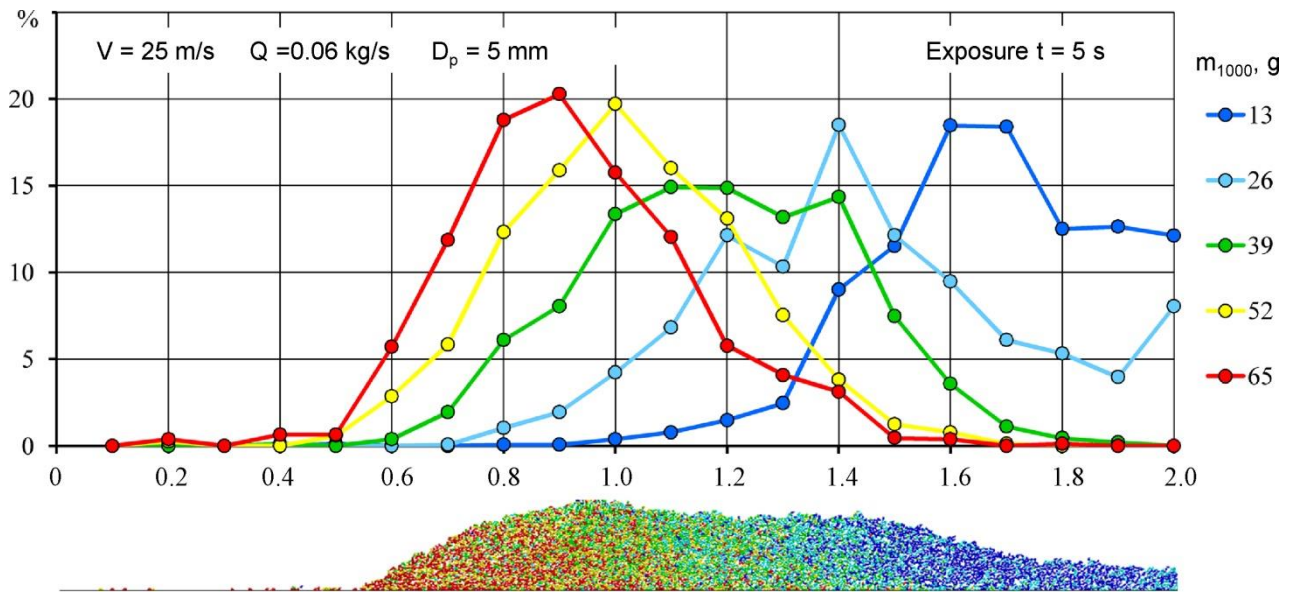


Fig. 4 – Distribution of seed fractions with effective diameter $D_p = 5$ mm along the length of the area formed by the air flow influence

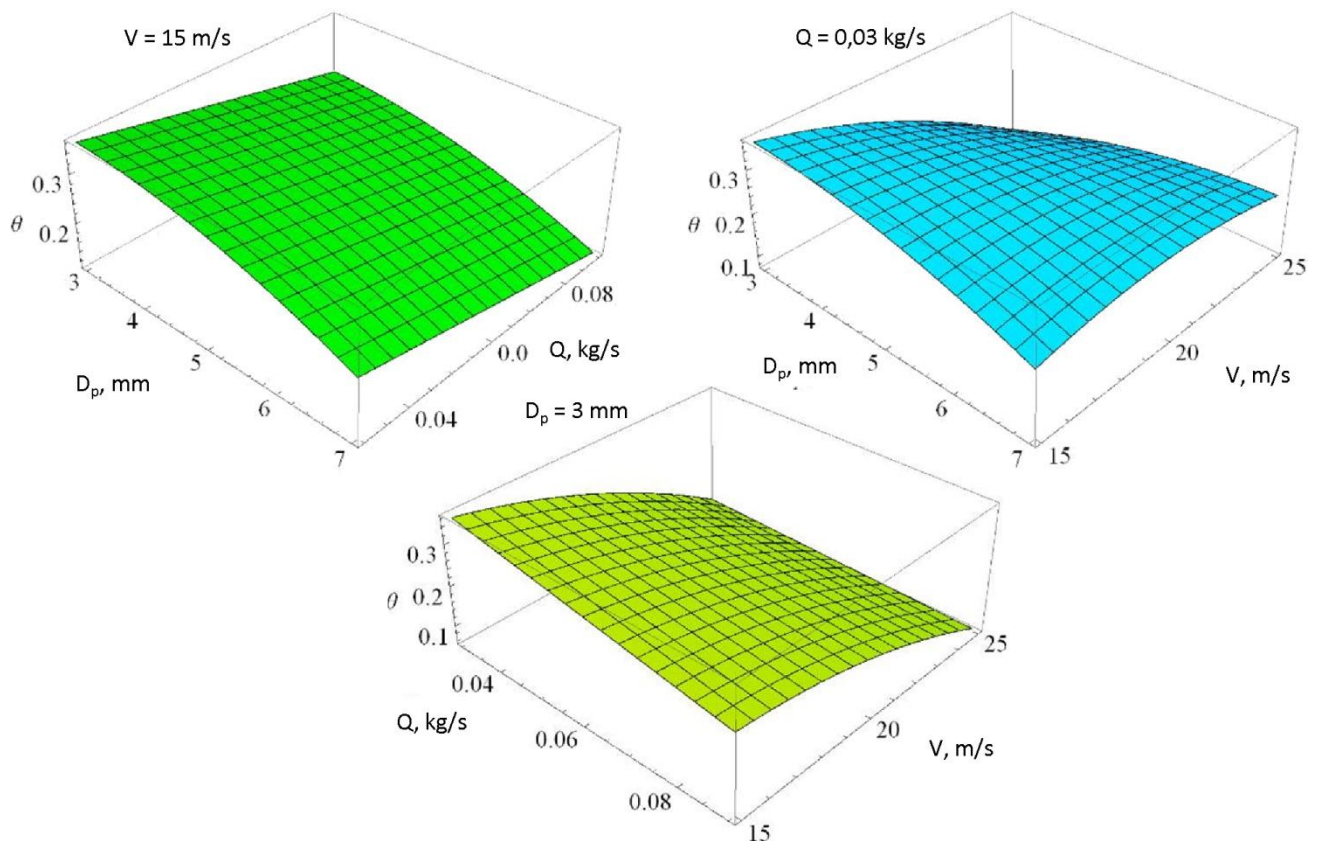


Fig. 5 – The dependence of the filling factor θ on the effective diameter of the seed D_p , the supply of seed Q and the air velocity V

According to the obtained data, the coefficient of distribution δ is calculated by the formula (6). Using Mathematica software package, a mathematical expression is compiled in a skilled form after the reduction of non-significant parts of the equation according to Student's criterion, which links the coefficient of distribution δ to the factors of research:

$$\delta = 67.568 - 4.87605 D - 0.537449 D^2 - 152.139 Q - 1.22609 V + 0.542871 D V + 6.11275 Q V - 0.0510141 V^2 \quad (8)$$

The graphical interpretation of the dependence (8) is shown in Fig. 6. The optimum parameters of equation (8) under the condition of the maximum distribution coefficient δ are $D_p = 3$ mm, $Q = 0.03$ kg/s, $V = 15$ m/s. As it can be seen in Fig. 6, with increasing the seeds supply, the distribution factor θ decreases by parabola; the diameter of the seed D_p and the air velocity V affects the distribution coefficient δ by the function of the hyperbolic paraboloid.

The second stage, namely experimental research, has been carried out using the method of mathematical planning of the multifactorial experiment, which allows determining the mathematical processes' models in the form of regression equations. The obtained mathematical model of the influence of the investigated factors on the coefficient of distribution δ is the following:

$$\delta = 36.8588 - 0.87431 x_1 + 0.0222222 x_1^2 + 3.12163 x_2 + 0.883579 x_1 x_2 - 1.25313 x_2^2 \quad (9)$$

For this equation, the 95 % probability level of the dispersion is homogeneous, the value of the Cochran criterion $G = 0.2594 < G_{0.05} (2; 9) = 0.4755$. Dispersion of the adequacy of the mathematical model $S_{aad}^2 = 1.879$; variance of experimental error $S_y^2 = 1.4870$; Fisher's value $F = 1.26 < F_{0.05} (5; 18) = 2.77$. The model is adequate at any level of confidence probability. According to the calculated values of the correlation coefficients and Student's criterion $t_{0.05} (18) = 2.1$, all coefficients are significant at the confidence level of over 95 %. In a sketched form, the model (9) has the following form:

$$\delta = 6.07089 - 29.1437 Q + 2.62933 V - 0.0501251 V^2 \quad (10)$$

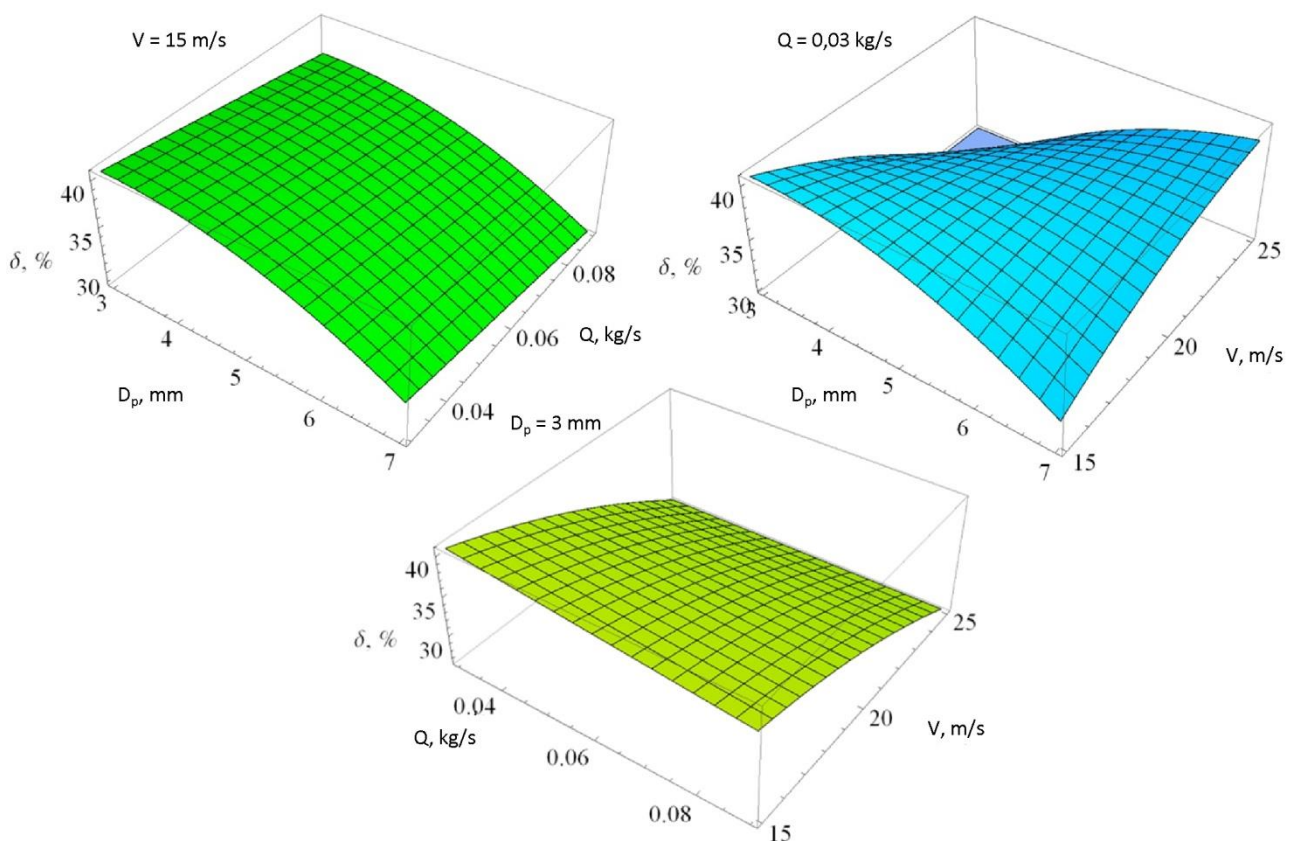


Fig. 6 – The dependence of the distribution coefficient δ on the effective diameter of the seed D_p , the seeding Q and the air flow velocity V

Analyzing equation (10), it can be argued that the factor of distribution δ is affected by all of the above-mentioned factors. At the same time, with increasing air flow velocity V , the distribution coefficient δ increases. And with increasing seed Q supply, the distribution coefficient δ decreases. The graphical interpretation of the experimental (10) and theoretical dependences (8) obtained at $D_{p1} = 6$ mm and $D_{p2} = 7$ mm is shown in Fig. 7. Statistical analysis showed that the correlation coefficient between the theoretical (8) and experimental (10) dependencies in the variation of the factors' values in the given range is 0.96.

The mathematical model of the influence of the investigated factors on the power consumed by the experimental installation, has the form:

$$P = 1.62667 + 0.0116667 x_1 - 0.0183333 x_1^2 + 0.995556 x_2 - 0.000833333 x_1 x_2 - 0.01 x_2^2 \quad (11)$$

For this equation, the 95 % probability level of the dispersion is homogeneous, the value of the Cochran criterion $G = 0.1675 < G_{0.05} (2; 9) = 0.4755$. Dispersion of the adequacy of the mathematical model $S_{aad}^2 = 0.00215$; variance of experimental error $S_y^2 = 0.00135$; value of Fisher's criterion $F = 1.59 < F_{0.05} (7; 18) = 2.58$; the model is adequate at any level of confidence probability. According to the calculated values of the correlation coefficients and Student's criterion $t_{0.05} (18) = 2.1$, all coefficients are significant at the confidence level of over 95 %. In a sketched form, the model (11) has the form:

$$P = - 2.35556 + 0.199111 V \tag{12}$$

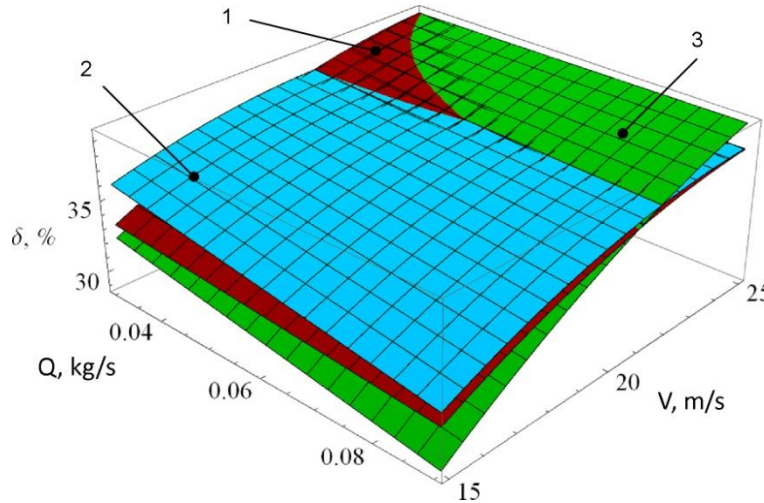


Fig. 7 – The dependence of the distribution coefficient δ on the seeds supply Q and air flow velocity V
 1 – experimental dependence (10); 2 – theoretical dependence (8) with $D_{p1} = 6 \text{ mm}$;
 3 – theoretical dependence (8) with $D_{p2} = 7 \text{ mm}$

The graphic interpretation of the obtained dependence (12) is presented in Fig. 8. Analyzing Equation (12), it can be argued that the power consumed by the experimental installation linearly affects only the air flow velocity V .

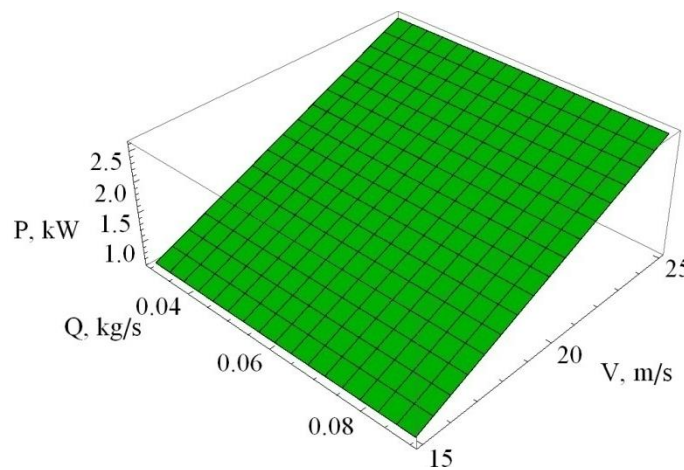


Fig. 8 – The dependence of the power P , consumed by the experimental installation, on the seeds supply Q and air velocity V

The task of solving a compromise problem was to minimize the power P consumed by the experimental installation, with the maximum value of the distribution coefficient δ and the seeds supply Q , that is:

$$\begin{cases} \delta(Q, V) \rightarrow \max, \\ P(Q, V) \rightarrow \min, \\ Q \rightarrow \max. \end{cases} \tag{13}$$

Convert the system of equations (13) to the form:

$$\frac{P(Q,V)}{Q \times \delta(Q,V)} \rightarrow \min . \quad (14)$$

The solution of the problem (14) with the aid of Mathematica software package leads to optimal technological regimes of the sunflower seeds separation during movement under the influence of air flow: $Q = 0.09$ kg/s, $V = 15$ m/s, $\delta = 31.6$ %, $P = 0.63$ kW.

CONCLUSIONS

As a result of numerical simulation of the mechanical and technological process of sunflower seeds separation during movement under the influence of air flow, there has been developed the dependences of the distribution of each fraction of the seeds on the length of the area (average value, average square deviation σ , filling factor θ , distribution coefficient δ) from the seed effective diameter D_p , air flow velocity V and the seed supply Q . Under the condition of a maximum filling factor θ and a distribution coefficient δ , rational regime parameters of the specified process are defined: for effective diameter of the seed $D_p = 5$ mm supply is $Q = 0.03$ kg/s, and air velocity $V = 15$ m/s.

As a result of experimental studies of the mechanical and technological process of sunflower seed separation during its movement under the action of air flow, a physical-mathematical model was developed that linked the distribution coefficient δ and the consumed power P to the supply of seed Q and air velocity V . Statistical analysis has showed that the correlation coefficient between the theoretical and experimental dependencies in the variation of the factors' values in the given range is 0.96.

During the research, the compromise problem has been solved, in particular, the minimization of the power P consumed by the experimental installation with the maximum value of the distribution coefficient δ and the seeds supply Q : $Q = 0.09$ kg/s, $V = 15$ m/s, $\delta = 31.6$ %, $P = 0.63$ kW.

REFERENCES

- [1] Aliev E.B., (2017), Numerical modeling results of the mechano-technological process of the oilseed seeding material transfer under the air flow influence, *Bulletin of Zhytomyr National Agroecological University (Вісник Житомирського національного агроекологічного університету)*, №1 (58), Т.1, pp. 173–180, Zhytomyr / Ukraine;
- [2] Aliev E.B., (2016), Technical and technological support of oil crop seeds purification and separation processes, *Records of the Ukrainian Scientific and Practical Conference of Young Scientists and Specialists from May 25-26, 2016 The role of scientific research in providing the processes of the Ukrainian agrarian production innovative development./ NAAS, GA ISC NAAS, Ministry of Agrarian Policy and Food of Ukraine, Ukrainian Institute of Plant Variety Expertise (Матеріали Всеукраїнської науково-практичної конференції молодих вчених і спеціалістів 25–26 травня 2016 р. Роль наукових досліджень в забезпеченні процесів інноваційного розвитку аграрного виробництва України. / НААН, ДУ ІЗК НААН, М-во аграр. політики та прод. України, Укр. ін-т експертизи сортів рослин.)*, pp. 4-5, Vinnytsya/Ukraine;
- [3] Aliev E.B., Bandura V.M., Pryshliak V.M., Yaropud V.M., Trukhanska O.O., (2018), Modeling of mechanical and technological processes of the agricultural industry, *INMATEH Agricultural Engineering*, Vol. 54, Nr. 1, pp. 95–104, Bucharest/Romania;
- [4] Aliev E.B., Shevchenko I.A., (2017), Investigation of aerodynamic properties of oilseeds, *Bulletin of Agrarian Science (Вісник аграрної науки)*, №3 (769), pp. 63–65, Kiev/Ukraine;
- [5] Aliev E., Yaropud V., (2017), Research of physical and mechanical properties of oilseed crops, *MOTROL. Commission of Motorization and Energetics in Agriculture*, Vol. 19, No 3, pp. 103–108, Lublin/Poland;
- [6] Aliev E.B., Yaropud V.M., (2017), Physical and mathematical apparatus of seeds movement in the air flow, *Ukrainian scientific journal "Technology, energy, transport, agribusiness" (Всеукраїнський науково-технічний журнал «Техніка, енергетика, транспорт АПК»)*, №2 (97), pp. 19–23, Vinnytsia/Ukraine;
- [7] Burenko K.S., Vedmedeva E.V., Pershin A.F., (2012), Studying of sunflower collection for the trait of large fruit (Изучение коллекции подсолнечника по составляющим признакам крупноплодности), *Scientific and technical bulletin Institute oilseeds NAAS (Науково-технічний бюлетень Інституту олійних культур НААН)*, № 17, С. 42–47, Zaporizhia/Ukraine;

- [8] GOST 10854-88 (2010), Oilseeds. Methods for determining the weed, oil and specially accounted impurity, Enter: 23.12.88. *Standartinform*, 10 p, Moscow/Russia.
- [9] Nurullin E.G., Salakhov I.M., Dmitriev A.V., (2014), Mathematical model of the seeds movement in the main chamber of the pneumatic and mechanical treating machine, *Bulletin of the Kazan State University of Agriculture (Вестник Казанского ГАУ)*, № 1 (31), pp. 69–72, Kazan/Russia;
- [10] Tishchenko L.N., Olshansky V.P., Olshansky S.V., (2010), *Hydrodynamics of grain separation: monograph (Гидродинамика сепарирования зерна: монографія)*, 174 p, Kharkiv/Ukraine;
- [11] Vedmedeva K.V. Makhova T.V., Kirpichova N.M., (2017), The result of selection for a large-fatty line and a sunflower variety, *Collection of scientific works of the Selection-Genetic Institute of the National Centre for Seed and Selection Studies (Збірник наукових праць селекційно-генетичного інституту Національного центру насіннезнавства та сортовивчення)*, issue 29 (69), pp. 26–34, Odessa/Ukraine;
- [12] Zaika P.M., (2006), The theory of agricultural machines. Volume 3, Section 7. *Cleaning and sorting seeds (Теорія сільськогосподарських машин. Том.3, розділ 7. Очистка і сортування насіння)*, 407 p, Kharkiv/Ukraine.