

**INMATEH -**

**AGRICULTURAL  
ENGINEERING**

**MAY - AUGUST**

*No liability is assumed by the editorial staff for the content of scientific papers and opinions published in this volume. They represent the author's point of view*

## *Editorial*

*The National Institute of Research-Development for Machines and Installations designed to Agriculture and Food Industry - INMA Bucharest has the oldest and most prestigious research activity in the field of agricultural machinery and mechanizing technologies in Romania.*

### *Short History*

- ✓ *In 1927, the first research Center for Agricultural Machinery in Agricultural Research Institute of Romania - ICAR (Establishing Law was published in O.D. no. 97/05.05.1927) was established;*
- ✓ *In 1930, was founded The Testing Department of Agricultural Machinery and Tools by transforming Agricultural Research Centre of ICAR- that founded the science of methodologies and experimental techniques in the field (Decision no. 2000/1930 of ICAR Manager - GHEORGHE IONESCU ȘIȘEȘTI);*
- ✓ *In 1952, was established the Research Institute for Mechanization and Electrification of Agriculture - ICMA Băneasa, by transforming the Department of Agricultural Machines and Tools Testing;*
- ✓ *In 1979, the Research Institute of Scientific and Technological Engineering for Agricultural Machinery and Tools - ICSITMUA was founded - subordinated to Ministry of Machine Building Industry - MICM, by unifying ICMA subordinated to MAA with ICPMA subordinated to MICM;*
- ✓ *In 1996 the National Institute of Research-Development for Machines and Installations designed to Agriculture and Food Industry - INMA was founded - according to G.D. no.1308/25.11.1996, by reorganizing ICSITMUA, G.D no. 1308/1996 coordinated by the Ministry of Education and Research G.D. no. 823/2004;*
- ✓ *In 2008 INMA has been accredited to carry out research and developing activities financed from public funds under G.D. no. 551/2007, Decision of the National Authority for Scientific Research - ANCSno. 9634/2008.*

*As a result of widening the spectrum of communication, dissemination and implementation of scientific research results, in 2000 was founded the institute magazine, issued under the name of SCIENTIFIC PAPERS (INMATEH), ISSN 1583 – 1019.*

*Starting with volume 30, no. 1/2010, the magazine changed its name to INMATEH - *Agricultural Engineering*, appearing both in print format (ISSN 2068 - 4215), and online (ISSN online: 2068 - 2239). The magazine is bilingual, abstract being published in native language and English, with a rhythm of three issues / year: January-April, May-August, September-December and is recognized by CNCSIS – with B<sup>+</sup> category. Published articles are from the field of AGRICULTURAL ENGINEERING: technologies and technical equipment for agriculture and food industry, renewable energy, machinery testing, environment, transport in agriculture etc. and are evaluated by specialists inside the country and abroad, in mentioned domains.*

*Technical level and performance processes, technology and machinery for agriculture and food industry increasing, according to national requirements and European and international regulations, as well as exploitation of renewable resources in terms of efficiency, life, health and environment protection represent referential elements for the magazine „INMATEH - *Agricultural Engineering*”.*

*We are thankful to all readers, publishers and assessors.*

*Editor in chief,*

*Ph. D. Eng. Vladut Nicolae-Valentin*

**Managing Editorial Board - INMA Bucharest****Editor in Chief****VLADUȚ Nicolae-Valentin**

Ph.D.Eng, SR I

E-mail: [inmatehjournal@gmail.com](mailto:inmatehjournal@gmail.com)**Executive Editor****POPA Lucreția**

Ph.D.Eng, SR I

**Assistant Editor****MATACHE Mihai-Gabriel**

Ph.D.Eng, SR I

**Logistic support, database****MURARU Virgil, Ph.D.Eng, SR I****ȚICU Tania, techn.****Scientific Secretary****Cârdei Petre, math.****Official translators****RADU Daniela-Cristina, Prof. English, French****Editorial Board**

- Acad. Prof. Ph.D. TABĂRA Valeriu - Romania, President of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șișești";
- Ph.D. BOGOESCU Marian - Romania, Vicepresident of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șișești";
- Hon.Prof.Ph.D.Eng. PIRNA Ion - Romania, President of the Department of Agricultural Mechanization of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șișești";
- Ph.D. Eng. NICOLESCU C. Mihai - Romania, Scientific General Secretary of the ASAS-Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șișești";
- Assoc.Prof. Ph.D. Eng. BELC Nastasia - Romania, IBA Bucharest;
- Ph.D. Eng. BUȚU Alina - Romania, INSB Bucharest;
- Prof. Ph.D. Eng. PARASCHIV Gigel - Romania, P.U. Bucharest;
- Prof. Ph.D.Eng. BIRIȘ Sorin - Romania, P.U. Bucharest;
- Prof. Ph.D. Eng. VLASE Sorin - Romania, "Transilvania" University Brașov;
- Prof. Ph.D.Eng. BURNETE Nicolae - Romania, Technical University Cluj Napoca;
- Prof. Ph.D. Eng. FILIP Nicolae - Romania, Technical University Cluj Napoca;
- Prof. Ph.D. Eng. VOICU Gheorghe - Romania, P.U. Bucharest;
- Prof. Ph.D. Eng. GERGEN Iosif -Romania,USAMVB Timișoara;
- Prof. Ph.D. Eng. ȚENU Ioan - Romania, USAMV Iași;
- Assoc.Prof.Ph.D.Eng. BUNGESCU Sorin - Romania, USAMVB Timișoara;
- Prof. Ph.D.Eng. FENYVESI László - Hungary, Hungarian Institute of Agricultural Engineering Godolo;
- Assist.Prof.Ph.D.Eng. BILANDZIJA Nikola - Croatia, University of Zagreb;
- Ph.D. BIOCCA Marcello - Italy Agricultural Research Council, Agricultural Engineering Research Unit;
- Prof.Ph.D.Eng. MIHAILOV Nikolay - Bulgaria, University of Rousse;
- Assoc.Prof.Ph.D.Eng. ATANASOV At. - Bulgaria, University of Rousse;
- Assoc.Prof. Ph.D. ERTEKIN Can - Turkey, Akdeniz University Antalya;
- Prof. Ph.D.Sc. Eng. VARTUKAPTEINIS Kaspars - Latvia, Latvia University of Agriculture, Institute of Agricultural Machinery;
- ir. HUYGHEBAERT Bruno - Belgium, Walloon Agricultural Research Center CRA-W;
- Prof.Ph.D. Eng. FABBRO Dal Inacio Maria - Brazil, Campinas State University;
- Prof. Ph.D. Eng. DE WRACHIEN Daniele - Italy, State University of Milan;
- Prof. Ph.D.Guanxin YAO - P.R.China, Along Agriculture R&DTechnology and Management Consulting Co., Ltd;
- Prof. Ph.D. Eng. GONZÁLEZ Omar - Republic of Cuba, Central University "Marta Abreu" de las Villas;
- Assist. Prof.Dr. KABAŞ Önder –Turkey, Akdeniz University.
- Asist.Prof.Dr. SELVİ Kemal Çağatay - Turkey, Ondokuz Mayıs University.

**In the present, *INMATEH - Agricultural Engineering* journal is indexed in the next international databases:**  
 ELSEVIER /SciVerse SCOPUS, CLARIVATE ANALYTICS' WEB OF SCIENCE- Emerging Sources Citation Index (ESCI),  
 ULRICHS Web: Global Serials Directory, CABI, SCPIO, Index COPERNICUS International,  
 EBSCO Publishing, Elektronische Zeitschriftenbibliothek

**INMATEH - Agricultural Engineering****vol. 55, no.2 / 2018**

NATIONAL INSTITUTE OF RESEARCH-DEVELOPMENT FOR MACHINES AND  
 INSTALLATIONS DESIGNED TO AGRICULTURE AND FOOD INDUSTRY -  
 INMA Bucharest

6 Ion Ionescu de la Brad Blvd., sector 1, Bucharest

Three issues per year,  
 e-ISSN: 2068 – 2239  
 p ISSN: 2068 – 4215

Edited by: INMA Bucharest

**Copyright: INMA Bucharest / Romania**

# CONTENT

		Page(s)
1.	<p style="text-align: center;"><b>RESEARCH ON A BOILER FURNACE MODULE EFFECTIVENESS WORKING ON SMALL FRACTURE WASTES / ДОСЛІДЖЕННЯ ЕФЕКТИВНОСТІ РОБОТИ ТОПКОВОГО ПРИСТРОЮ КОТЛОАГРЕГАТУ НА ПАЛИВІ З ДРІБНОЗЕРНИСТИХ ВІДХОДІВ</b></p> <p style="text-align: center;">Prof.D.Sc. Golub G.A.<sup>1)</sup>, Prof. D.Sc. Kukharets S.M.<sup>2)</sup>, S.Lect. Ph.D. Tsyvenkova N.M.<sup>2)</sup>, Teach. Assis. Grad.Stud. Golubenko A.A.<sup>2)</sup>, Grad.Stud. Kalenichenko P.S.<sup>2)</sup></p> <p style="text-align: center;"><sup>1)</sup>National University of Life and Environmental Sciences of Ukraine / Ukraine, <sup>2)</sup>Zhytomyr National Agroecological University / Ukraine</p>	9
2.	<p style="text-align: center;"><b>DESIGN AND EXPERIMENTAL STUDY OF A RAPESEED BROADCAST SPREADER OF SCREW-DROP TYPE / 螺旋排种式油菜籽撒播机设计及试验</b></p> <p style="text-align: center;">Prof. Ph.D. Eng. Xie S.Y., Ms. Stud. Eng. Yu T., Ms. Stud. Eng. Chen T.H., Ms. Stud. Eng. Yang Z.R., Prof. Ph.D. Eng. Yang L., Prof. Ph.D. Eng. Yang M.J.*)</p> <p style="text-align: center;">Southwest University, College of Engineering and Technology, Chongqing Key Laboratory of Agricultural Equipment for Hilly and Mountainous Regions / P. R. China</p>	19
3.	<p style="text-align: center;"><b>EXPERIMENTAL RESEARCHES ON THE WORKING PROCESS OF A SEEDBED PREPARATION EQUIPMENT FOR HEAVY SOILS / CERCETĂRI EXPERIMENTALE PRIVIND PROCESUL DE LUCRU AL UNUI ECHIPAMENT DE PREGĂTIT PATUL GERMINATIV PENTRU SOLURI GRELE</b></p> <p style="text-align: center;">PhD. Stud. Vlăduț D.I.<sup>1)</sup>, Prof. PhD. Eng. Biriș S.<sup>1)</sup>, PhD. Eng. Vlăduț V.<sup>2)</sup>, PhD. Stud. Eng. Cujbescu D.<sup>2)</sup>, Lect. PhD. Eng. Ungureanu N.<sup>1)</sup>, PhD. Stud. Eng. Găgeanu I.<sup>2)</sup></p> <p style="text-align: center;"><sup>1)</sup>University "POLITEHNICA" Bucharest / Romania; <sup>2)</sup>INMA Bucharest / Romania</p>	27
4.	<p style="text-align: center;"><b>MATHEMATICAL MODEL OF BENDING VIBRATIONS OF A HORIZONTAL FEEDER-MIXER ALONG THE FLOW OF GRAIN MIXTURE / МАТЕМАТИЧНА МОДЕЛЬ ЗГИННИХ КОЛИВАНЬ ГОРИЗОНТАЛЬНОГО ЗАВАНТАЖУВАЧА-ЗМІШУВАЧА ВЗДОВЖ ПОТОКУ ЗЕРНОВОЇ СУМІШІ</b></p> <p style="text-align: center;">DSc. Eng. Lyashuk O.L.<sup>1)</sup>, Lect. Ph.D. Eng. Sokil M.B.<sup>3)</sup>, PhD Eng. Klendiy V.M.<sup>1)</sup>, PhD Eng. Skyba O.P.<sup>1)</sup>, Tretiakov O.L.<sup>1)</sup>, Slobodian L.M.<sup>1)</sup>, PhD Econ. Slobodian N.O.<sup>2)</sup></p> <p style="text-align: center;"><sup>1)</sup>Ternopil Ivan Pul'uj National Technical University/ Ukraine; <sup>2)</sup>SHEI "Ternopil State Medical University Gorbachevskiy / Ukraine; <sup>3)</sup>National University Lviv Polytechnic / Ukraine</p>	35
5.	<p style="text-align: center;"><b>INVESTIGATION OF OIL EXTRACTION FROM THE CANOLA AND SOYBEAN SEEDS, USING A MICROWAVE INTENSIFIER / ДОСЛІДЖЕННЯ ЕКСТРАКЦІЇ ОЛІЇ З НАСІННЯ РІПАКУ ТА СОЇ ПРИ ВИКОРИСТАННІ МІКРОХВИЛЬОВОГО ІНТЕНСИФІКАТОРА</b></p> <p style="text-align: center;">Prof. PhD. Bandura V.<sup>1)</sup>, Prof. Ph.D. Eng. Bulgakov V.<sup>2)</sup>, Prof. Ph.D. Eng. Adamchuk V.<sup>3)</sup>, Ph.D. Eng. Ivanovs S.<sup>4)</sup></p> <p style="text-align: center;"><sup>1)</sup>Vinnitsia National Agrarian University/ Ukraine; <sup>2)</sup>National University of Life and Environmental Sciences / Ukraine, <sup>3)</sup>National Scientific Centre "Institute for Agricultural Engineering and Electrification" / Ukraine; <sup>4)</sup>Latvia University of Agriculture / Latvia</p>	45
6.	<p style="text-align: center;"><b>HOT-AIR DRYING CHARACTERISTICS AND QUALITY EVALUATION OF BITTER MELON SLICE / 苦瓜片热风干燥特性及品质评价</b></p> <p style="text-align: center;">Ms.Eng. Liang Yang, Ms.Eng. Zhonghuan Hu, Prof. Ling Yang, Prof. Shouyong Xie, Prof. Mingjin Yang*)</p> <p style="text-align: center;">Southwest University, College of Engineering and Technology / P. R. China</p>	53
7.	<p style="text-align: center;"><b>ONION BULBS ORIENTATION DURING ALIGNED PLANTING OF SEED-ONION USING VIBRATION-PNEUMATIC PLANTING DEVICE / ОРИЕНТИРОВАНИЕ ЛУКОВИЦ ПРИ ПОСАДКЕ ВИБРАЦИОННО-ПНЕВМАТИЧЕСКИМ ВЫСАЖИВАЮЩИМ АППАРАТОМ ДЛЯ ПОСАДКИ ЛУКОВИЦ ЛУКА-СЕВКА</b></p> <p style="text-align: center;">PhD. Eng.Sc. Aksenov A.G., Prof. PhD. Eng.Sc. Izmaylov A.Iu., Prof. PhD. Eng.Sc. Dorokhov. A.S., PhD. Eng.Sc. Sibirev A.V.</p> <p style="text-align: center;">FSBSI "Federal Scientific Agronomic and Engineering Centre VIM" / Russia</p>	63
8.	<p style="text-align: center;"><b>NEW WORKING ELEMENT OF STRIPPER HEADER "OZON" / НОВЫЙ РАБОЧИЙ ОРГАН ОЧЕСЫВАЮЩЕЙ ЖАТКИ "ОЗОН"</b></p> <p style="text-align: center;">Prof. PhD. Eng.Sc. Aldoshin N.V.<sup>1)</sup>, Prof. PhD. Eng.Sc. Kravchenko I.N.<sup>1)</sup>, Prof. PhD. Eng.Sc. Kuznetsov Y.A.<sup>2)</sup>, Prof. PhD. Phil.Sc. Kalashnikova L.V.<sup>3)</sup>, Assoc. Prof. D.Eng.Sc. Korneev V.M.<sup>1)</sup></p> <p style="text-align: center;"><sup>1)</sup>Russian State Agrarian University – Moscow Agricultural Academy Timiryazev, Moscow / Russia; <sup>2)</sup>Orel State Agrarian University -Parakhin / Russia; <sup>3)</sup>Orel State University -Turgenev / Russia</p>	71
9.	<p style="text-align: center;"><b>SOIL COMPRESSION DEGREE BY USING THE VIBRO-COMBINATOR / GRADUL DE COMPACTARE A SOLULUI LA UTILIZAREA VIBRO-COMBINATORULUI</b></p> <p style="text-align: center;">Assoc. Prof. Ph.D. Eng. Boja N.*<sup>1)</sup>, Lect. Ph.D. Eng. Boja F.<sup>1)</sup>, Stud. Ph.D.Eng. Vidrean D.<sup>1)</sup>, Lect. Ph.D. Eng. Teusdea A.<sup>2)</sup>, Assoc. Prof. Ph.D. Eng. Bungescu S.<sup>3)</sup> Prof. Ph.D. Eng. Borz SA.<sup>4)</sup></p> <p style="text-align: center;"><sup>1)</sup>"Vasile Goldiș" Western University of Arad / Romania; <sup>2)</sup>University of Oradea, Faculty of Environmental Protection / Romania; <sup>3)</sup>University of Agricultural Sciences and Veterinary Medicine of Banat Timișoara, Faculty of Agriculture, Timișoara / Romania; <sup>4)</sup>Transilvania University of Brasov, Faculty of Silviculture and Forest Engineering, Brasov / Romania</p>	77

		Page(s)
10.	<p><b>THE NUMERICAL SIMULATION OF HEAT AND MASS TRANSFER PROCESSES IN TUNNELING AIR VENTILATION SYSTEM IN POULTRY HOUSES /</b>  <b>ЧИСЕЛЬНЕ МОДЕЛЮВАННЯ ПРОЦЕСІВ ТЕПЛО- І МАСООБМІНУ ПРИ ТУНЕЛЬНІЙ СИСТЕМІ ВЕНТИЛЯЦІЇ ПОВІТРЯ У ПТАШНИКАХ</b></p> <p>Prof. Ph.D. Eng. Gorobets V.G.<sup>1)</sup>, Senior lecturer Ph.D. Eng. Trokhaniak V.I.<sup>1)</sup>, Senior lecturer Ph.D. Eng. Antypov I.O.<sup>1)</sup>, Assoc. Prof. Ph.D. Eng. Bohdan Yu.O.<sup>2)</sup></p> <p><sup>1)</sup> National University of Life and Environmental Sciences of Ukraine;  <sup>2)</sup> Kherson State Maritime Academy / Ukraine</p>	87
11.	<p><b>DETERMINATION OF THE PARAMETERS OF TRANSPORTING AND MIXING FEED MIXTURES ALONG THE CURVILINEAR PATHS OF TUBULAR CONVEYORS /</b>  <b>ВИЗНАЧЕННЯ ПАРАМЕТРІВ ПРОЦЕСУ ТРАНСПОРТУВАННЯ ТА ЗМІШУВАННЯ КОРМОВИХ СУМІШЕЙ НА КРИВОЛІНІЙНИХ ТРАСАХ ТРУБЧАТИХ КОНВЕЄРІВ</b></p> <p>Prof.Ph.D.Eng. Hevko R.B.<sup>1)</sup>, Assoc.Prof.Ph.D. Eng. Liubin M.V.<sup>2)</sup>, Assoc. Prof. Ph.D. Eng. Tokarchuk O.A.<sup>2)</sup>, Prof. Ph.D. Eng. Lyashuk O.L.<sup>3)</sup>, Prof. Ph.D. Eng. Pohrishchuk B.V.<sup>1)</sup>, Assoc. Prof. Ph.D. Eng. Klendii O.M.<sup>4)</sup></p> <p><sup>1)</sup>Ternopil National Economical University / Ukraine; <sup>2)</sup> Vinnytsia National Agrarian University / Ukraine; <sup>3)</sup>Ternopil Ivan Puluj National Technical University; <sup>4)</sup>Separated Subdivision of National University of Life and Environmental Sciences of Ukraine Berezhany Agrotechnical Institute / Ukraine</p>	97
12.	<p><b>EFFECTS OF STEM REGION, MOISTURE CONTENT AND BLADE OBLIQUE ANGLE ON MECHANICAL CUTTING OF MILLET STEMS /</b>  <b>秸秆部位、含水率和刀片倾斜角对谷子秸秆切割力学性质的影响</b></p> <p>As. Ph.D. Stud. Eng. Yanqing Zhang, Prof. Ph.D. Eng. Qingliang Cui<sup>*</sup>, Prof. Ph.D. Eng. Hongbo Li, M.S. Stud. Eng. Deng Sun, Ph.D. Stud. Eng. Huaming Hou</p> <p>College of Engineering, Shanxi Agriculture University, Taigu / China</p>	105
13.	<p><b>VERIFICATION OF THE MATHEMATICAL MODEL OF THE ENERGY CONSUMPTION DRIVE FOR VIBRATING DISC CRUSHER /</b>  <b>ВЕРИФІКАЦІЯ МАТЕМАТИЧНОЇ МОДЕЛІ СПОЖИВАНИХ ЕНЕРГОВИТРАТ ПРИВОДА ВІБРАЦІЙНОЇ ДИСКОВОЇ ДРОБАРКИ</b></p> <p>Ph.D. Eng. Kupchuk I.M., Ph.D. Eng. Solona O.V., Ph.D. Eng. Derevenko I.A., Ph.D. Eng. Tverdokhlib I.V.</p> <p>Vinnytsia National Agrarian University / Ukraine</p>	113
14.	<p><b>EVALUATION INDEX SYSTEM OF MECHANIZED MAIZE PRODUCTION /</b>  <b>玉米生产全程机械化水平评价指标体系的研究与应用</b></p> <p>Lecturer Li Xin<sup>1)</sup></p> <p><sup>1)</sup> College of Electrical and Mechanical Engineering, Agricultural University of Hebei, Baoding / China</p>	121
15.	<p><b>PERFORMANCE AND KINETIC STUDY OF THE ANAEROBIC CO-DIGESTION OF COCOA HUSK AND DIGESTED COW MANURE WITH HIGH ORGANIC LOADING RATE /</b>  <b>PERFORMANSI DAN STUDI KINETIKA PADA PROSES ANAEROBIK CO-DIGESI KULIT KAKAO DAN LIMBAH MANURE SAPI DENGAN LAJU PEMASUKAN BAHAN ORGANIK YANG TINGGI</b></p> <p>Darwin, Muhammad Ilham, Afrizal Fazil</p> <p>Department of Agricultural Engineering, Syiah Kuala University, Darussalam, Banda Aceh 23111, Indonesia</p>	131
16.	<p><b>MEASUREMENT OF DOWNWASH VELOCITY GENERATED BY ROTORS OF AGRICULTURE DRONES / 植保无人机旋翼下洗气流速度的测量</b></p> <p>As. Prof. Ph.D. Tan Feng<sup>*1)</sup>, Ph.D. Lian Qi<sup>2)</sup>, M.S. Liu Chang-liang<sup>3)</sup>, M.S. Jin Bing-kun<sup>4)</sup></p> <p><sup>1)</sup> School of Electrical and Information, Heilongjiang Bayi Agricultural University, Daqing / China; <sup>2)</sup> School of Engineering, Heilongjiang Bayi Agricultural University, Daqing / China; <sup>3)</sup> Key Laboratory of Surface Engineering of Equipment for Hydraulic Engineering of Zhejiang Province, Hangzhou / China; <sup>4)</sup> Faculty of Mechanical and Materials Engineer, Western University, London/Canada</p>	141
17.	<p><b>DROUGHT MONITORING AND FORECASTING METHOD BASED ON GOOGLE CLOUD COMPUTING SERVICE PLATFORM / 基于 GOOGLE 云计算服务平台的旱情监测预测方法</b></p> <p>Kai Zhao<sup>*1).2)</sup>, Jingwei Chang<sup>1)</sup>, Xinming Ma<sup>2)</sup>, Feng Zhao<sup>3)</sup></p> <p><sup>1)</sup>Information Engineering College, North China University of Water Resources and Electric Power, Zhengzhou/China; <sup>2)</sup> Henan Agricultural University, Zhengzhou/China; <sup>3)</sup>Department of Aerospace Sciences School of Engineering, Cranfield University, Bedfordshire/U.K.</p>	151
18.	<p><b>THEORETICAL SUBSTANTIATION OF THE SCRAPER INSTALLATION PARAMETERS FOR REMOVING MANURE / ТЕОРЕТИЧНЕ ОБҐРУНТУВАННЯ ПАРАМЕТРІВ СКРЕПЕРНОЇ УСТАНОВКИ ДЛЯ ПРИБИРАННЯ ГНОЮ</b></p> <p>Prof. Dr. Eng. Sc. Golub G.A.<sup>1)</sup>, Ph.D. Eng. Ikalchuk M.I.<sup>2)</sup>, Prof., Dr. Eng. Sc. Pilipaka S.F.<sup>1)</sup>, Prof., Dr. Agr. Sc. Teslyuk V.V.<sup>1)</sup>, Ph.D.Eng. Khmelevskiy V.S.<sup>1)</sup>, Eng. Shvets R.L.<sup>1)</sup></p> <p><sup>1)</sup> National University of Life and Environmental Sciences of Ukraine, Kyiv / Ukraine;  <sup>2)</sup> Separated subdivision of the National University of Bioresources and Nature Management of Ukraine "Nizhyn Agrotechnical Institute", Nizhyn / Ukraine</p>	161

		Page(s)
19.	<p><b>ANALYTICAL INVESTIGATION OF THE INTERACTION OF THE SUNFLOWER STEM WITH THE LATERAL FACE OF THE REAPER LIFTER / АНАЛІТИЧНЕ ДОСЛІДЖЕННЯ ВЗАЄМОДІЇ СТЕБЛА СОНЯШНИКУ ІЗ БІЧНОЮ ГРАННЮ ЛІФТЕРА ЖАТКИ</b></p> <p>Prof. Ph.D. Eng. Nalobina O.O. <sup>1)</sup>, Ph.D. Eng. Gerasymchuk O.P. <sup>2)</sup>, Ph.D. Eng. Puts V.S. <sup>2)</sup>,  Ph.D. Eng. Martyniuk V.L. <sup>2)</sup>, Ph.D. Eng. Shovkomyd O.V. <sup>2)</sup>, Vasylchuk N.V. <sup>2)</sup>,  Ph.D. Eng. Bundza O.Z. <sup>1)</sup>, Ph.D. Eng. Holotiuk M.V. <sup>1)</sup>, Ph.D. Eng. Serilko D.L. <sup>1)</sup></p> <p><sup>1)</sup>National University of Water and Environmental Engineering / Ukraine  <sup>2)</sup>Lutsk National Technical University / Lvivska str., 75, Lutsk, Ukraine</p>	171
20.	<p><b>KRAWTCHOUK MOMENT AND PARTICLE SWARM OPTIMIZED BP NEURAL NETWORK TO RECOGNIZE RICE PLANTHOPPER /</b></p> <p><i>基于 Krawtchouk 矩和 PSO 神经网络的稻飞虱识别研究</i></p> <p>Assoc. Prof. Ph.D. Xiuguo Zou <sup>*1)</sup>, MEE. Stud. Siyu Wang <sup>2)</sup>, Assoc. Prof. Ph.D. Yan Qian <sup>1)</sup>,  MAE. Stud. Shuaitang Zhang <sup>1)</sup></p> <p><sup>1)</sup> College of Engineering, Nanjing Agricultural University / China;  <sup>2)</sup> School of environmental science and Engineering, Nanjing University of Information Science and Technology / China</p>	181

## DETERMINATION OF THE PARAMETERS OF TRANSPORTING AND MIXING FEED MIXTURES ALONG THE CURVILINEAR PATHS OF TUBULAR CONVEYORS

/

## ВИЗНАЧЕННЯ ПАРАМЕТРІВ ПРОЦЕСУ ТРАНСПОРТУВАННЯ ТА ЗМІШУВАННЯ КОРМОВИХ СУМІШЕЙ НА КРИВОЛІНІЙНИХ ТРАСАХ ТРУБЧАТИХ КОНВЕЄРІВ

Prof. Ph.D. Eng. Hevko R.B.<sup>1)</sup>, Assoc. Prof. Ph.D. Eng. Liubin M.V.<sup>2)</sup>, Assoc. Prof. Ph.D. Eng. Tokarchuk O.A.<sup>2)</sup>, Prof. Ph.D. Eng. Lyashuk O.L.<sup>3)</sup>, Prof. Ph.D. Eng. Pohrishchuk B.V.<sup>1)</sup>, Assoc. Prof. Ph.D. Eng. Klendii O.M.<sup>4)</sup>

<sup>1)</sup>Ternopil National Economical University / Ukraine; <sup>2)</sup>Vinnytsia National Agrarian University / Ukraine; <sup>3)</sup>Ternopil Ivan Puluj National Technical University; <sup>4)</sup>Separated Subdivision of National University of Life and Environmental Sciences of Ukraine Berezhanay Agrotechnical Institute / Ukraine  
E-mail: klendii\_o@ukr.net

**Keywords:** *curvilinear path; tubular conveyor; feed mixture; transporting; mixing; scraper.*

### ABSTRACT

The results of theoretical and experimental studies of simultaneous transporting and mixing the components of feed mixtures along the curvilinear paths of tubular conveyors are presented in this article. A mathematical model of the dependence of the change of elementary work performed while transporting the bulk material elementary mass along the curvilinear section is developed. Based on experimental researches, the technique of determining the technological parameters, which ensure the reduction of energy consumption while mixing bulk materials with the given quality of feed mixtures, is proposed. When considering the range of changes in the inner holes of the washers  $d_h = 14...25$  mm and the angles of their position to the horizon  $\alpha = 30^\circ...75^\circ$ , the intensity of the material components passing-through and their consequent mixing increases with the increase of the value of the parameter  $d_h$  and the reduction of the angle  $\alpha$ .

### РЕЗЮМЕ

У статті представлено результати теоретичних і експериментальних досліджень одночасного транспортування та змішування компонентів кормових сумішей на криволінійних трасах трубчатих конвеєрів. Побудована математична модель, яка характеризує залежність зміни елементарної роботи, що виконується під час переміщення елементарної маси сипкого матеріалу по криволінійній ділянці. Запропонована методика та проведені експериментальні дослідження з визначення параметрів виконання технологічного процесу, які забезпечать зниження енерговитрат при змішуванні сипких тіл та задану якість кормових сумішей. Встановлено, що для діапазону зміни внутрішніх отворів шайб  $d_h = 14...25$  мм і кутів їх розташування до горизонту  $\alpha = 30^\circ...75^\circ$  інтенсивність пересипання компонентів матеріалів та відповідно їх змішування зростає при збільшенні значення параметр  $d_h$  і зменшенні величини кута  $\alpha$ .

### INTRODUCTION

Based on the analysis of literature sources and experimental results of studying the processes of bulk materials transportation in closed jackets (Loveikin V. et al., 2010; Lyashuk O.L. et al., 2015; Owen Philip J. and Cleary Paul W., 2010; Rogatynska O. et al., 2015; Rohatynskyi R. M. et al., 2016; Roberts Alan W. and Bulk Solids, 2015) the vast majority of screw conveyors are found to possess the limited functionality; therefore, they can be used only on short paths of material movement. The challenge is to minimize the degree of damage to agricultural materials by applying the elastic working bodies (Loveikin V. and Rogatynska L., 2011; Rogatynska L.R., 2010) or by combining the processes of shredding and transporting lump materials (e.g., root crops) for feed preparation (Pankiv V.R. and Tokarchuk O.A., 2017). Due to such minimization of damages, the functional performance of transporters can be significantly improved. To increase the conveyors' performance, the material flow movement should be intensified by means of pneumatic devices (Manjula E.V.P.J. et al., 2017; Naveen Tripathi et al., 2015; Baranovsky V.M. et al., 2018; Hevko R.B. et al., 2018) and screw and tubular conveyors (Haydl H.M., 1986; Yao Y.P., et al., 2014). Many scientists have studied the methods of improving the operational and functional performance of screw and tubular conveyors, and the ways of reliable protecting their drive elements (Hevko B.M. et al., 2017; Hevko R.B. et al., 2016; Hevko R.B. et al., 2017) The objective of the present research is to ensure the reduction of energy consumption during simultaneous transporting and mixing bulk components of feed mixtures along the curvilinear paths of tubular conveyors.




**MATERIALS AND METHODS**

The material movement along the curvilinear section of the conveyor (Hevko R.B. et al., 2017, Fig. c) is considered as a case of the plane motion of the elementary mass  $dm_c$  (Fig.1a); the mass is located between the scraper spaces of the working body moving uniformly at the initial average velocity  $\vartheta_c$ . The movement of the elementary volume  $dV_m$  along the curvilinear section of the path is considered in polar coordinates; the path's axis is at point  $O$  (Fig.1b). The scraper moves along the trajectory of the fourth section of the ring with an average diameter  $D_c$ , transporting the average elementary mass of the bulk material  $dm_c$ .

The position of the elementary mass centre of the bulk material  $dm_c$  in the vector form is determined by the polar coordinates  $\vec{R}_c$  (radius-vector of the mass center movement  $dm_c$ ) and  $\varphi_c$  (polar angle).

The elementary mass center of the material  $dm_{Ac}$  (Fig.1b) at the initial moment of motion at the rate  $\vartheta_A$  (at  $t = 0$ ) is at point  $A$ . Its position is determined by the radius-vector  $\vec{R}_A$ , where  $\varphi_A = 0$ . In time  $t = t_B$ , the elementary mass center of the material  $dm_{Ac}$ , moves to point  $B$  under the action of centrifugal forces. The elementary mass center of the material  $dm_{Bc}$  is determined by the radius-vector and the polar angle  $\varphi_B$ .

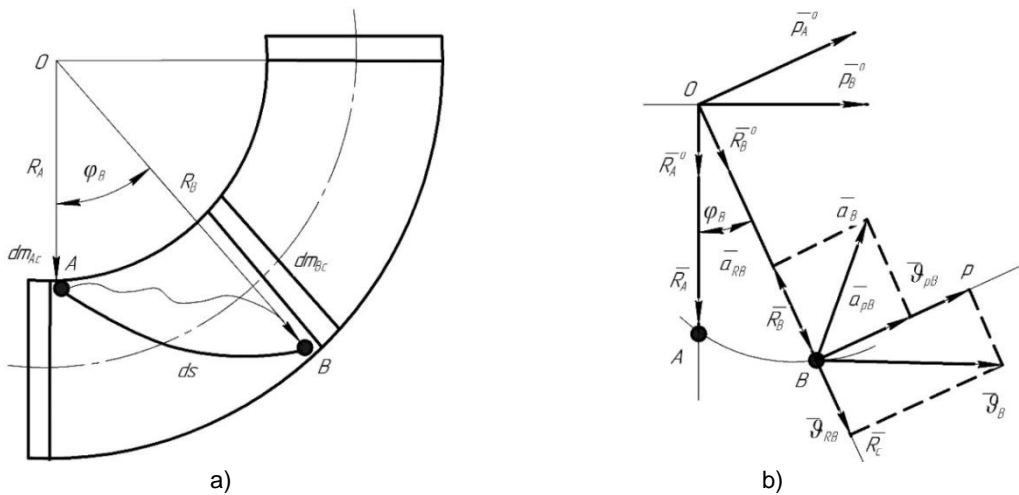

**Fig. 1 - Analytical models: a - for determining the movement of the elementary mass center of the material along the curvilinear path; b - for determining the kinematic parameters of the bulk material movement**

The motion equations of the elementary mass center of the bulk material  $dm_c$  in the polar coordinates for the case of the plane motion of the material body are deduced

$$\vec{R}_c = f_1(t); \quad \varphi_c = f_2(t) \tag{1}$$

For further analysis, the single vectors  $\vec{R}_A^0$  and  $\vec{R}_B^0$  are introduced (Fig. 1b); the vectors are directed in corresponding radii-vectors of corresponding points that characterize the corresponding elementary mass centres of the bulk material  $dm_{Ac}$  and  $dm_{Bc}$ , as well as the vectors  $\vec{p}_A^0$  and  $\vec{p}_B^0$ , which are perpendicular to the corresponding radii-vectors  $\vec{R}_A$  and  $\vec{R}_B$  and directed towards the increase of the polar angle  $\varphi_B$ .

Applying the radial  $\vartheta_{RB}$  and tangential  $\vartheta_{pB}$  velocities, the magnitude and direction of the scalar velocity  $\vartheta_B$  of the elementary mass center of the bulk material  $dm_{Bc}$  are determined

$$\vartheta_B = \sqrt{(\vartheta_{RB})^2 + (\vartheta_{pB})^2} = \sqrt{(\dot{R}_B)^2 + (R_B\dot{\varphi})^2} = \sqrt{\left(\frac{dR_B}{dt}\right)^2 + R_B^2\left(\frac{d\varphi_B}{dt}\right)^2} \tag{2}$$

Directional cosines are defined by formulas

- between the directions of the vectors  $\vec{g}_B$  and  $\vec{R}_B^0$

$$\cos(\vec{g}_B, \vec{R}_B^0) = \frac{d\vec{R}_B}{\vec{g}_B} = \frac{\dot{R}_B}{\vartheta_B} = \frac{\dot{R}_B}{\sqrt{(\dot{R}_B)^2 + (R_B\dot{\varphi})^2}} \tag{3}$$

- between the directions of the vectors  $\vec{g}_B$  and  $\vec{p}_B^0$

$$\cos(\vec{g}_B, \vec{p}_B) = \frac{\vec{R}_B \frac{d\varphi_B}{dt}}{\vec{g}_B} = \frac{R_B \dot{\varphi}_B}{\vec{g}_B} = \frac{R_B \dot{\varphi}_B}{\sqrt{(\dot{R}_B)^2 + (R_B \dot{\varphi})^2}} \quad (4)$$

Differential equation for determining the vector acceleration  $\vec{a}_B$  of point  $B$ , which specifies the position of the elementary mass center of the bulk material  $dm_{Bc}$  in time  $t = t_B$ , is deduced

$$\begin{aligned} \vec{a}_B &= \frac{d^2 R_B}{dt^2} \vec{R}_B^0 + \frac{dR_B}{dt} \frac{d\varphi_B}{dt} \vec{p}_B^0 + \frac{dR_B}{dt} \frac{d\varphi_B}{dt} \vec{p}_B^0 + R_B \frac{d^2 \varphi_B}{dt^2} \vec{p}_B^0 - R_B \frac{d\varphi_B}{dt} \frac{d\varphi_B}{dt} \vec{R}_B^0 = \\ &= \ddot{R}_B \vec{R}_B^0 + \dot{R}_B \dot{\varphi}_B \vec{p}_B^0 + \dot{R}_B \dot{\varphi}_B \vec{p}_B^0 + R_B \ddot{\varphi}_B \vec{p}_B^0 - R_B (\dot{\varphi}_B)^2 \vec{R}_B^0 = \\ &= [\ddot{R}_B - R_B (\dot{\varphi}_B)^2] \vec{R}_B^0 + (R_B \ddot{\varphi}_B + 2\dot{R}_B \dot{\varphi}_B) \vec{p}_B^0 \end{aligned} \quad (5)$$

Similar to the velocity vector  $\vec{g}_B$ , the acceleration vector  $\vec{a}_B$  of point  $B$  is equal to the geometric sum of two vectors, in particular the first vector, which is located on the radius-vector of point  $B$   $\vec{R}_B = \overline{OB}$  and directed along it, and the second vector, which is perpendicular to this radius-vector.

The scalar value of the projection of the acceleration vector  $\vec{a}_{R_B}$  directed along the radius-vector  $\vec{R}_B$  of point  $B$ , or the scalar value of the projection of the radial acceleration of point  $B$  are determined by the formula

$$a_{R_B} = \frac{d^2 R_B}{dt^2} - R_B \left( \frac{d\varphi_B}{dt} \right)^2 = \ddot{R}_B - R_B (\dot{\varphi}_B)^2 \quad (6)$$

and the scalar value of the acceleration vector  $\vec{a}_{p_B}$  projection, which is perpendicular to the radius-vector  $\vec{R}_B$  of point  $B$ , or the scalar value of the projection of the tangential acceleration of point  $B$  are equal to

$$a_{p_B} = R_B \frac{d^2 \varphi_B}{dt^2} + 2 \frac{dR_B}{dt} \frac{d\varphi_B}{dt} = R_B \ddot{\varphi}_B + 2\dot{R}_B \dot{\varphi}_B \quad (7)$$

Applying the radial  $a_{R_B}$  and tangential  $a_{p_B}$  accelerations, the magnitude and direction of the scalar acceleration of motion  $a_B$  of the elementary mass center of the bulk material  $dm_{Bc}$  are determined.

$$a_B = \sqrt{(a_{R_B})^2 + (a_{p_B})^2} = \sqrt{(\ddot{R}_B - R_B \dot{\varphi}_B^2)^2 + (R_B \ddot{\varphi}_B + 2\dot{R}_B \dot{\varphi}_B)^2} \quad (8)$$

To operationalize the above provisions, the technological process of moving the elementary mass center  $A$  of the bulk material  $dm_c$  is formalized as follows. The uniformly variable motion of the elementary mass center  $A$  of the bulk material  $dm_c$  is supposed to be set by parametric equations with consideration of aerodynamic forces of air resistance, which is assumed as a quadratic dependence of the resistance forces on the motion velocity.

At the first stage of the research, the force analysis of moving the elementary mass center  $A$  of the bulk material  $dm_c$  along the curvilinear trajectory from point  $A$  to point  $B$  is considered.

In Fig. 2, an equivalent model of forces arising during the movement of the elementary mass center  $A$  of the bulk material  $dm_c$  along the curvilinear trajectory of the plane curve without the rolling friction action is shown. To find the total generalized force  $Q_c$  acting on the elementary mass center  $B$  of the bulk material  $dm_{Bc}$ , a differential equation of particle motion is deduced

$$dm_{Bc} \frac{d\vartheta_B}{dt} = Q_c = dm_{Bc} d\vartheta_B = Q_c dt = 0 \quad (9)$$

where  $Q_c$  is the total generalized force acting on the elementary mass center  $B$  of the bulk material  $dm_c$  during its motion along the curvilinear trajectory from the initial position with the coordinates  $A\{0, 0\}$  to position  $B\{x_B, y_B\}$ . Taking into account the components of the forces acting on the elementary mass center  $B$  of the bulk material  $dm_{Bc}$ , the dependence is developed

$$dm_{Bc} \left\{ p \left[ \left( \frac{dR_B}{dt} \right)^2 + R_B^2 \left( \frac{d\varphi_B}{dt} \right)^2 \right] + \left[ \frac{f}{R_B} \frac{d\vartheta_B}{dt} + g \left( f \cos \left( \arctg \frac{dy}{dx} \right) - \sin \left( \arctg \frac{dy}{dx} \right) \right) \right] \right\} = 0 \quad (10)$$

where  $f$  – friction coefficient;  $g$  – free fall acceleration.

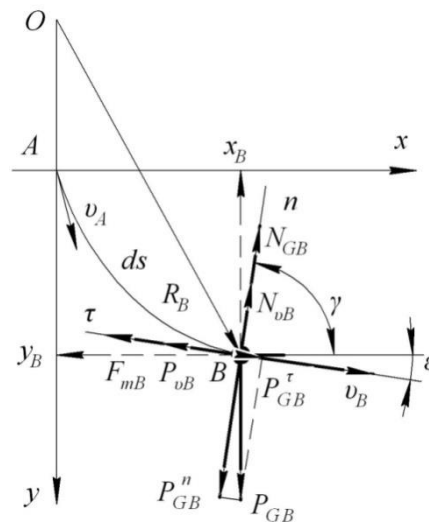


Fig. 2 - Analytical model for determining the dynamic parameters of the bulk cargo movement

The formula of an elementary work  $\delta A_{dm_c}$  that is consumed during the motion of the elementary mass of the bulk material  $dm_c$  along the curvilinear trajectory from the initial position with coordinates  $A \{0, 0\}$  to position  $B \{x_B, y_B\}$  is deduced

$$\delta A_{dm_{Bc}} = dV_{Bc} \psi \int_0^{x_B} \left[ p \left[ \left( \frac{dR_B}{dt} \right)^2 + R_B^2 \left( \frac{d\phi_B}{dt} \right)^2 \right] + \left[ \frac{f}{R_B} \sqrt{(\ddot{R}_B - R_B \dot{\phi}_B^2)^2 + (R_B \ddot{\phi}_B + 2\dot{R}_B \dot{\phi}_B)^2} + \sqrt{1 + \dot{y}_x} \right] + g [f \cos(\arctg(\dot{y}_x)) - \sin(\arctg(\dot{y}_x))] \right] dx, \quad (11)$$

where  $dV_{Bc}$  - elementary volume of the material at point  $B$ ,  $m^3$ ;  $\psi$  - specific mass of the bulk material,  $kg/m^3$ .

The deduced equation (Eq.11) is a deterministic mathematical model of the dependence of the change of the elementary work  $\delta A_{dm_c}$  performed during the motion of the elementary mass of the bulk material  $dm_c$  along the  $dc$  arc in time  $t_B$  on the structural and kinematic parameters of the working body path, or the parameters of material movement with consideration of air resistance forces.

To minimize the elementary work performance during the motion of the bulk material along the curvilinear section of the working body path, the trajectory of the bulk material motion should be determined and optimized by integrating the above analyzed mathematical model (Eq.11). Furthermore, the minimum time of moving the bulk material along the curvilinear section of the working body path can be substantiated.

For experimental research, the working body of the scraper conveyor-mixer is design in the form of separate hinged sections (Fig.3). The design consists of a guiding jacket 1. In the jacket, there are hinged scraper sections arranged in the form of a ring 2, and hooks 3 and 7. The ring part of the sections is covered by a disc 4 with a central inner opening 5. The working body is driven by a gear wheel, which contacts with the conical surface of the disc. The components of the bulk material 6 are captured by disks and partially passed through the central openings; then, they are mixed into a solid mixture, which is transported to the unloading zone.

To determine the degree of passing the bulk agricultural materials through the washer holes at their various angular positions along the curvilinear sections of the conveyor-mixer, an experimental stand with a working body is developed in the form of washer scrapers with different inner holes of various diameters (Fig. 4). The stand was located vertically; its overall dimensions were horizontally - 500mm; vertically - 650 mm. Radius of knee position - 400 mm; its inner radius - 46 mm; the washer outer diameter - 45mm.

The method for determining the time of the bulk material passing through the washer scrapers is as follows. In the curved knee, which consists of five sections, the bulk cargo weighing from 100 to 150 g was delivered; the coefficient of the space between scrapers is  $\psi = 0.6 \dots 0.9$ . After opening the damper valve, the pressure of the cargo flow pushed the lever pedal, activating an electric timing device. When the flow stopped moving, the electric timing device was disconnected. The amount of cargo was weighed on electronic weighting machines.

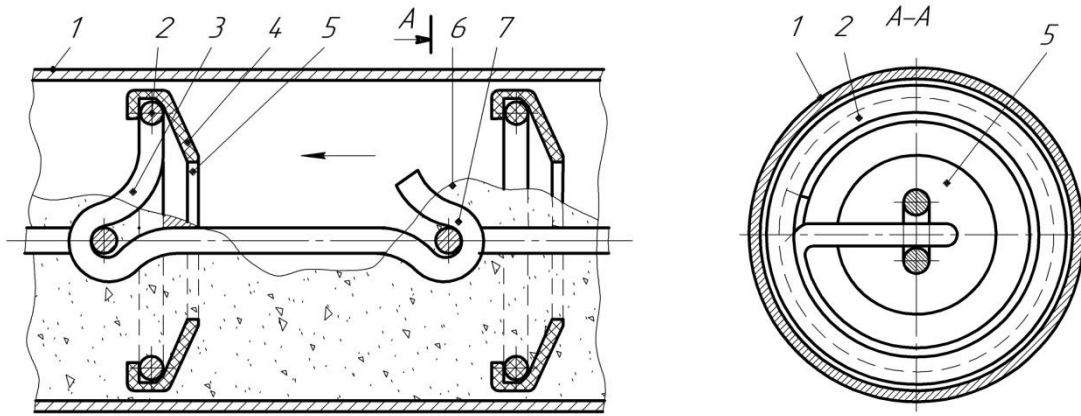


Fig. 3 - Working body of the scraper conveyor-mixer

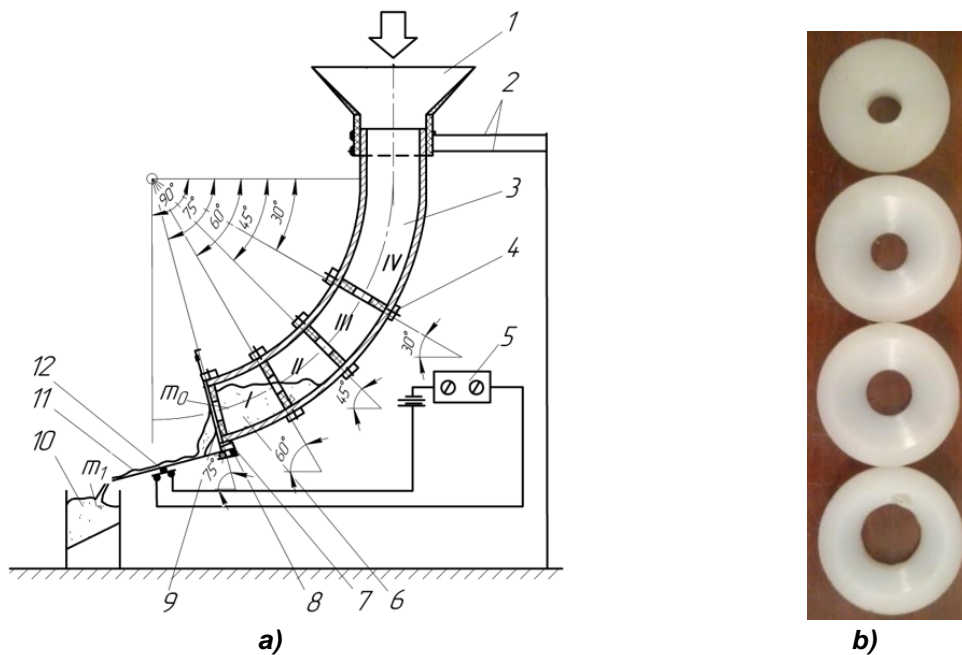


Fig. 4 - General view of the experimental stand (a) and washer scrapers with different inner holes (b)

1 - neck; 2 - stand; 3 - knee; 4 - a clamp; 5 - electric timing device; 6 - bulk material;  
7 - scraper; 8 - spring of a lever; 9 - damper valve, 10 - capacity; 11 - lever pedal; 12 - contacts

In the knee sections, the washer scrapers were arranged at the angles:  $\alpha_1 = 75^\circ$ ;  $\alpha_1 = 60^\circ$ ;  $\alpha_1 = 45^\circ$ ;  $\alpha_1 = 30^\circ$ . The inner holes in the washers varied within the range from 14 to 25 mm.

To provide the process of agricultural product transporting, a passing of the bulk material through the washer scrapers per second was calculated at their various angles of inclination to the horizon:  $Q = m / t$ , where  $m$  – cargo weight;  $t$  - time of passing.

## RESULTS

The research results are presented on the graphic dependences shown in Fig. 5-6.

Experimental studies were conducted to define the maximum possible loading coefficient between the scraper spaces  $\psi = 0.95$ .


The graphic dependences of the mass  $m$  of the combined feed passed through the washer holes with diameters  $d_h = 20 \dots 25$  mm on the moment of time  $t$  are shown in Fig. 5 a. The change in the hole diameter from 20 to 25 mm is found to cut time for the combined feed passing-through from 3.5 s to 2.25 s, providing the washer location angle to the horizon is  $\alpha = 30^\circ$ . At the same time, respectively 84.6% and 96.1% of the combined feed are passed through in the space between the scrapers.

Providing the washer location angle  $\alpha = 75^\circ$ ,

The time of passing-through the combined feed is  $t = 4.9$  s, provided  $d_h = 20$  mm and  $\alpha = 75^\circ$ . The time of passing-through the combined feed is  $t = 5.2$  s, provided  $d_h = 25$  mm  $\alpha = 75^\circ$ . At the same time, respectively, only 17.3% and 30.8% of the combined feed is passed through.

Thus, the angle of the washers' arrangement dominantly influences the process of the combined feed passing-through. Therefore, with the approach to the vertical section, the process of passing-through and consequent mixing the feed components significantly intensifies.

The wheat grain is passed through the washer hole of the diameter  $d_h = 18$  mm (Fig. 5 b).

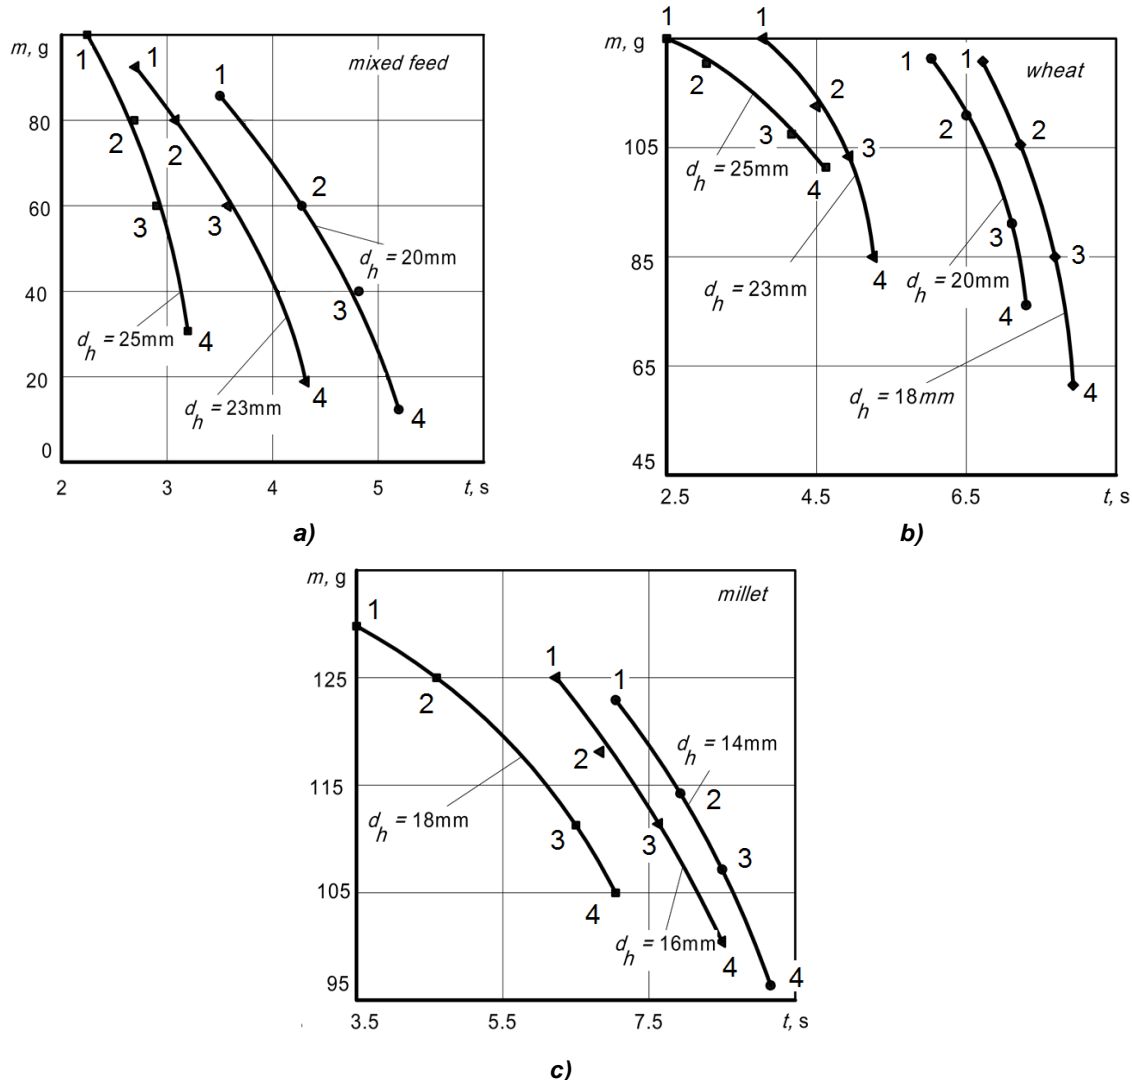

**Fig. 5 - Graphic dependences of the mass  $m$  of the mixed feed (a), wheat (b), and millet (c) passed through washer holes with different diameters  $d_h$  and their location angles to the horizon on the moment (1 –  $\alpha = 30^\circ$ , 2 –  $\alpha = 45^\circ$ , 3 –  $\alpha = 60^\circ$ , 4 –  $\alpha = 75^\circ$ ) of time  $t$**

Thus, providing  $d_h = 18$  mm,  $\alpha = 30^\circ$ , and  $t = 6.8$  s, 96% of wheat is passed-through. Providing  $d_h = 20$  mm,  $\alpha = 30^\circ$ , and 96% of passed-through wheat, the process takes 6 s.

The diameter of the washer hole  $d_h$  increases from 23 to 25 mm, the time of wheat passing-through sharply decreases (if  $\alpha = 30^\circ$ ), respectively, from 3.7 s to 2.5 s. In both cases, the percentage of passed-through wheat is 98.4%.

At the same time, providing  $\alpha = 75^\circ$  and  $d_h = 18$  mm, 47% of wheat is passed-through in time  $t = 8$  s; and, respectively, providing  $\alpha = 75^\circ$  and  $d_h = 25$  mm, 80% of wheat is passed-through in time  $t = 4.6$  s.

Based on the analysis of the graphic dependencies shown in Fig. 5c, the scrapers with the diameter of the inner openings  $d_h = 14$  and 18 mm are found more effective for transporting the millet and its further mixing with the appropriate concentrated additives. Such diameter values are proved to ensure the implementation of the technological process with the corresponding indicators, similar to the above considered cases.

The dependence of passing the combined feed and millet through different holes of scraper washers per second  $g$  (g/s) on their location angle to the horizon was experimentally developed.

The research results are presented in the form of graphical dependencies shown in Fig. 6.

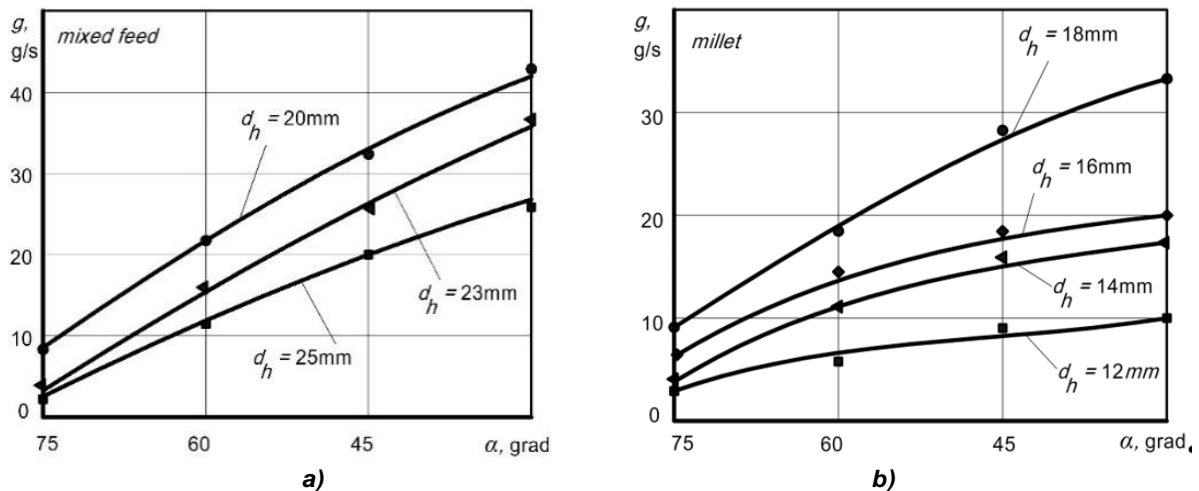


Fig. 6 - Graphical dependencies of passing  $g$  the combined feed (a) and millet (b) on the inclination angle  $\alpha$  of the washer scrapers to the horizon per second

Based on the developed dependencies, the necessary structural parameters of the working bodies of the washer conveyor-mixer can be defined. To provide a certain degree of mixing feed mixtures, their main components should be considered.

## CONCLUSIONS

Based on the known research results, a new technological model of simultaneous transporting and mixing the components of bulk cargo along curvilinear paths is proposed.

The process of moving the bulk material by scraper and washer working bodies along the curvilinear section of the technological path is simulated; the dynamic parameters of the bulk cargo movement are determined. The developed equation is a deterministic mathematical model of the dependence of the change of elementary work performed during the movement of the bulk material elementary mass. The model allows determining the minimum time of moving the bulk material along the curvilinear section of the working body path.

The dependences of the mass  $m$  of the combined feed passed through the holes of diameter  $d_h = 20 \dots 25$  mm on time  $t$  were analyzed. The change in the washer hole' diameter was found to cut time for passing the combined feed in time from 3.5 s to 2.25 s, providing the angle of washer location is  $\alpha = 30^\circ$ . Correspondently, the amount of passed combined feed in the space between scrapers is 84.6% and 96.1% of its total mass. In the range of changing in the holes and angles parameters, the washer location angle is considered to influence dominantly the process of the combined feed passing-through. Therefore, with the approach to the vertical section, the process of passing and mixing the components of feeds significantly intensifies.

The washer hole diameter  $d_h = 18$  mm is found more applicable for transporting the wheat grain. Thus, providing  $d_h = 18$  mm,  $\alpha = 30^\circ$ , and  $t = 6.8$  s, 96% of wheat is passed-through; providing  $d_h = 20$  mm,  $\alpha = 30^\circ$ , and 96% of passed-through wheat, the process takes 6 s. Then, providing  $\alpha = 75^\circ$ ,  $d_h = 18$  and 25 mm, the percentages of the passed wheat are, respectively, 47% at  $t = 8$  s and 80% at  $t = 4.6$  s.

The scrapers with the diameter of the inner holes  $d_h = 14$  and 18 mm are found more applicable for transporting the millet and its further mixing with the appropriate concentrated additives. Such diameter values are proved to ensure the implementation of the technological process with the corresponding indicators, similar to the above considered cases.

## REFERENCES

- [1] Baranovsky V.M., Hevko R.B., Dzyura V.O., Klendii O.M., Klendii M.B., Romanovsky R.M., (2018), Justification of rational parameters of a pneumoconveyor screw feeder, *INMATEH: Agricultural Engineering*, vol.54, no.1, pp. 15-24, Bucharest/Romania;

- [2] Haydl H.M., (1986), Design aspects of large-diameter tubular conveyor galleries, *Proceedings of the institution of civil engineers, Part 1 – Design and construction*, Vol. 80, pp. 633-639, London/England;
- [3] Hevko B.M., Hevko R.B., Klendii O.M., Buriak M.V., Dzyadykevych Y.V., Rozum R.I., (2018), Improvement of machine safety devices. *Acta Polytechnica, Journal of Advanced Engineering*, Vol.58, no.1, pp.17-25, Prague/Czech Republic;
- [4] Hevko R.B., Klendii M.B., Klendii O.M., (2016), Investigation of a transfer branch of a flexible screw conveyer, *INMATEH: Agricultural Engineering*, vol.48. no.1, pp.29-34, Bucharest/Romania;
- [5] Hevko R.B., Rozum R.I., Klendiy O.M., (2016), Development of design and investigation of operation processes of loading pipes of screw conveyors, *INMATEH: Agricultural engineering*, vol.50, no.3, pp.89-94, Bucharest/Romania;
- [6] Hevko R.B., Yazlyuk B.O., Liubin M.V., Tokarchuk O.A., Klendii O.M., Pankiv V.R., (2017), Feasibility study of mixture transportation and stirring process in continuous-flow conveyors, *INMATEH: Agricultural Engineering*, vol.51, no.1, pp.49-59, Bucharest/Romania;
- [7] Hevko R.B., Strishenets O.M., Lyashuk O.L., Tkachenko I.G., Klendii O.M., Dzyura V.O., (2018), Development of a pneumatic screw conveyor design and substantiation of its parameters, *INMATEH: Agricultural Engineering*, vol.54, no.1, pp.153-160, Bucharest/Romania.
- [8] Loveikin V., Rogatynska O., Rogatynska L., Dudun Y., (2010), Dynamics of Screw Conveyers (Динаміка гвинтових конвеєрів), *Bulletin of I.Pyliui Ternopil National Technical University (Вісник ТНТУ ім. І.Пулюя)*, Vol.15, pp.100-105, Ternopil/Ukraine;
- [9] Loveikin V., Rogatynska L., (2011), A Model of Loose Material Transportation by Means of High-Speed Conveyers with Elastic Operating Devices (Модель транспортування сипкого вантажу швидкохідними гвинтовими конвеєрами з еластичними робочими органами). *Bulletin of I.Pyliui Ternopil National Technical University (Вісник ТНТУ ім. І.Пулюя)*, Vol.16, pp.66-70, Ternopil/Ukraine;
- [10] Lyashuk O.L., Rogatynska O.R., Serilko D.L., (2015), Modelling of the vertical screw conveyer loading, *INMATEH Agricultural Engineering*, vol. 45, no. 1, pp. 87-94, Bucharest/Romania;
- [11] Manjula E.V.P.J., Hiromi W.K. Ariyaratne, Ratnayake Chandana, Morten C. Melaen, (2017), A review of CFD modelling studies on pneumatic conveying and challenges in modelling offshore drill cuttings transport, *Powder Technology*, Vol.305, pp.782-793;
- [12] Naveen Tripathi, Atul Sharma, S.S. Mallick, Wypych P.W., (2015), Energy loss at bends in the pneumatic conveying of fly ash, *Particuology*, vol.21, pp. 65-73;
- [13] Owen Philip J., Cleary Paul W., (2010), Screw conveyor performance: comparison of discrete element modelling with laboratory experiments. *Progress in computational fluid dynamics*, Vol. 10, Issue 5-6, pp.327-333, Geneva/ Switzerland;
- [14] Pankiv V.R., Tokarchuk O.A., (2017), Investigation of constructive geometrical and filling coefficients of combined grinding screw conveyor. *INMATEH Agricultural Engineering*, vol.51, no.1, pp.59-68, Bucharest/Romania;
- [15] Rogatynska L.R., (2010), Evaluation of Stress-Strained State of Elastic Helixes of Screw Conveyers when Loading (Оцінювання напружено-деформованого стану еластичних спіралей гвинтових конвеєрів при навантаженні), *Bulletin of I. Pyliui Ternopil National Technical University (Вісник ТНТУ ім. І.Пулюя)*, Vol.15, pp.131-137. Ternopil/Ukraine;
- [16] Rogatynska O., Liashuk O., Peleshok T., Liubachivskiy R., (2015), Investigation of the Process of Loose Material Transportation by Means of Inclined Screw Conveyers (Дослідження процесу транспортування сипкого вантажу похилими гвинтовими конвеєрами), *Bulletin of I.Pyliui Ternopil National Technical University (Вісник ТНТУ ім. І.Пулюя)*, Vol.79, pp.137-143, Ternopil/Ukraine;
- [17] Rohatynskiy R.M., Diachun A.I., Varian A.R., (2016), Investigation of Kinematics of Grain Material in a Screw Conveyor with a Rotating Casing (Дослідження кінематики зернового матеріалу у гвинтовому конвеєрі із обертовим кожухом), *Bulletin of Kharkiv Petro Vasylenko National Technical University of Agriculture (Вісник ХНТУСГ імю Петра Василенка №168)*. Vol. 168, pp.24-31. Kharkiv/Ukraine;
- [18] Roberts Alan W., Bulk Solids, (2015), Optimizing Screw Conveyors. *Chemical engineering*. Vol.122 (2), pp.62-67, New York/USA;
- [19] Yao Y.P., Kou Z.M., Meng W.J., Han G., (2014), Overall Performance Evaluation of Tubular Scraper Conveyors Using a TOPSIS-Based Multi-attribute Decision-Making Method, *Scientific World Journal*, New York/USA.



**Edited by: INMA Bucharest**

6 Ion Ionescu de la Brad Blvd., sect. 1, Bucharest, ROMANIA

Tel: +4021.269.32.60; Fax: +4021.269.32.73

<http://www.inmateh.eu>

e-mail: [inmatehjournal@gmail.com](mailto:inmatehjournal@gmail.com)