



# PRZEGLĄD ELEKTROTECHNICZNY

ROK XCVIII




WYDAWNICTWO  
SIGMA-NOT



cena 58 zł  
(w tym 8% VAT)



W numerze wybrane  
artykuły autoreów  
ukraińskich z Kijowa,  
Charkowa, Lwów i  
Winnicy  
str. 1-19

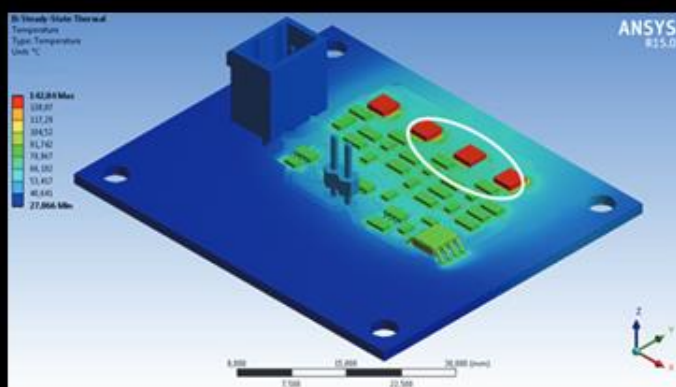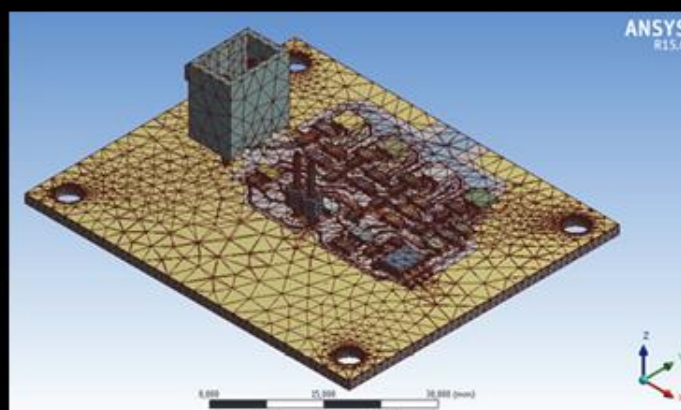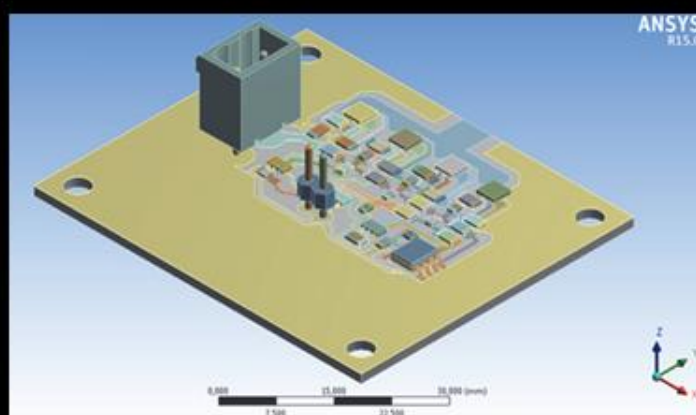

Symulacja termiczna sterownika bramkowego tranzystora MOSFET  
mocy pracującego z częstotliwością 30 MHz – str 49

Spis treści

01	<b>Sergey GOOLAK<sup>1</sup>, Ievgen RIABOV<sup>2</sup>, Oleksandr GOROBCHENKO<sup>1</sup>, Viktor YURCHENKO<sup>4</sup>, Olena NEZLINA</b> - Udoskonalenie modelu asynchronicznego silnika trakcyjnego lokomotywy elektrycznej poprzez uwzględnienie <i>strat mocy</i>	1
02	<b>Anatolii SPIRIN, Ihor KUPCHUK, Ihor TVERDOKHLIB, Yurii POLIEVODA, Kateryna KOVALOVA, Victor DMYTRENKO</b> - Analiza sposobów suszenia miazgi lucerny przez aktywną wentylację w laboratoryjnej suszarce elektrycznej	11
03	<b>Petro Baran, Yuriy Varetsky, Viktor Kidyba, Yaroslava Pryshliak, Igor Sabadash, Oleksandr Franchuk</b> - <b>Monitorowanie obiektów systemu elektroenergetycznego w oparciu na sieć VPN</b>	16
04	<b>Helena NOWAKOWSKA</b> - Wpływ właściwości rury wyladowczej na parametry plazmy mikrofalowej wytwarzanej przez fale powierzchniową	20
05	<b>Sławomir SAMBOR, Jarosław EMILIANOWICZ, Rafał OWCZARCZAK<sup>1</sup></b> - Przykład zastosowania sieci LoRaWAN do monitorowania parametrów środowiskowych w budynku wielkopowierzchniowym	27
06	<b>Piotr WĘGLARSKI, Jarosław JUNG</b> - Termiczne usuwanie warstwy pokrycia akrylowego z włókien światłowodowych	33
07	<b>Tomasz JAKUBOWSKI, Serhiy SYROTYUK, Vasyi LOPUSHNIAK, Atilgan ATILGAN</b> - Wpływ stymulacji zmiennym polem magnetycznym nasion pszenicy o różnym przeznaczeniu technologicznym	38
08	<b>Marian HYLA</b> - Filtracja wyższych harmonicznych w układzie zasilania tyrystorowej maszyny wyciągowej transportu szybowego w kopalni	43
09	<b>Piotr LEGUTKO</b> - Symulacja termiczna sterownika bramkowego tranzystora MOSFET mocy pracującego z częstotliwością 30 MHz	49
10	<b>Marian WNUK</b> - Antena mikropaskowa o polaryzacji wirującej przeznaczona do systemu DSRC	55
11	<b>Leszek NOWOSIELSKI, Bartosz DUDZIŃSKI, Aleksandra Maria ŚLUBOWSKA</b> - "Odzież „Smart” do monitorowania parametrów życiowych	62
12	<b>K. Sivaranjani, P. Evanzalin Ebenanjar, D. Ponmary Pushpa Latha</b> - Wyzwalana zdarzeniem niezawodna synchronizacja chaotycznego układu t <sub>e</sub> tnic wiencowych	67
13	<b>Mohd Hafiz Jali<sup>1</sup>, Ahmad Nur Azeim Ahmad Zamzuri, Hazli Rafis Abdul Rahim, Md. Ashadi Md Johari, Aminah Ahmad, Mohamad Faizal Baharom, Huda Adnan Zain, Sulaiman Wadi Harun</b> - Wykrywanie acetonu jako potencjalnego nieinwazyjnego narzędzia diagnostycznego dla pacjentów z cukrzycą	71
14	<b>Wasana BOONSONG</b> - Nowatorskie programowanie sztucznej inteligencji — dynamiczne programowanie termometru na podczerwień w oparciu o Internet rzeczy (IoT)	76
15	<b>Indar Chaerah GUNADIN, Agus SISWANTO, Safrizal SAFRIZAL, Syukriyadin SYUKRIYADIN, Marwan ROSYADI, Zaenab MUSLIMIN, GASSING, Ramly RASYID</b> - Prognozowanie zapadu napięcia, gdy wielkoskalowe turbiny wiatrowe przenikną do systemów energetycznych przy użyciu optymalnie przyciętych maszyn do nauki ekstremalnych (OPELM) — studium przypadku: system elektroenergetyczny South Sulawesi-Indonesia	80
16	<b>Boumediene BENABDALLAH SEREIR, Radhawane SADOUNI, Ahmed TAHOUR, Habib HAMDAR, Salim DJERIO</b> - Rozmyte bezpośrednie sterowanie zorientowane na pole silnika indukcyjnego z podwójnym stojanem (DSIM) z obserwatorem MRAS przeznaczonym do fotowoltaicznego układu pompowego	85
17	<b>Felix KALUNTA, Tolulope AKINBULIRE, Frank OKAFOR</b> - Analiza rezonansu szeregowego w sieciach dystrybucyjnych z zagregowanymi źródłami harmonicznych	92
18	<b>Fatiha Zaghrat, Brahim Gasbaoui, Boussema Bouchiba, Ismail Bousserhane, Imane Chaoufi</b> - Odporne Slizgowe sterowanie silnikiem DC	97
19	<b>Nuchanart SANTALUNAI, Samran SANTALUNAI, Adisak RATTANANAMLOM, Pichaya CHAIPANYA, Piyaporn MEESAWAD Chanchai THONGSOPA, Tajchai PUMPOUNG</b> - Badanie właściwości metamateriałów przy użyciu metalicznej struktury prętów w inżynierii antenowej	103
20	<b>Safwan A. HAMOODI, Ali N. HAMOODI Farah I. HAMEED</b> - Sterowanie twornikiem silnika prądu stałego w oparciu o programowalny sterownik logiczny	110
21	<b>Karam Mudhafar Younus, Ahmed M. A. Sabaawi</b> - Projektowanie wielosektorowej macierzy mmWave z wykorzystaniem elementów anteny Bowtie dla mobilnych stacji bazowych 5G	115
22	<b>Armin Sofijan, Bhakti. Y Suprpto, Zainuddin Nawawi</b> - Eksperymentalna analiza ACP w fotowoltaice jako konwekcja swobodna w celu zwiększenia mocy wyjściowej	121
23	<b>Mustafa Hussein Ibrahim, Muhammed A Ibrahim, Salam Ibrahim khather</b> - Modelowanie i analiza systemu SA-SPV z dwukierunkowym falownikiem do obciążenia oświetleniowego	126
24	<b>Fairouz Belilita, Tewfik Bekkouche, Nourredine Amardjia</b> - Ulepszona, oparta na systemie chaotycznym mapa logistyczna 1D stosowana do sztyfowania obrazów w skali szarości	130
25	<b>Phatsakul THITIMAHATTANAKUSOL, Adirek JANTAKUN, Saksit SUMMART</b> - Elektronicznie sterowany filtr dwukwadratowy oparty na pojedynczym MO-CCCCTA	134
26	<b>Siham Khelifa, Abdelhafid Semmah</b> - Poprawa jakości energii w DFIG opartym na turbinie wiatrowej przy użyciu sterowania rozmytego i neural-RIP w celu łagodzenia harmonicznych	140
27	<b>Paweł KIEŁBASA, Anna MIERNIK, Tomasz DRÓŹDŹ</b> - Wpływ stymulacji stałym polem elektrycznym zawiesin wybranych mikroorganizmów na strukturę geometryczną komórek	148
28	<b>Paweł KIEŁBASA, Anna MIERNIK, Tomasz DRÓŹDŹ, Tomasz SZCZEGIELNIAK</b> - Wpływ stymulacji elektromagnetycznej substancji czynnej wybranych roślin na ich możliwości antyseptyczne	152
29	<b>Oleksii Hyka, Andres Vejar, Tomasz Rymarczyk</b> - Projektowanie systemu do analizy danych potencjału powierzchniowego na tkankach biologicznych	157
30	<b>Anna MIERNIK, Paweł KIEŁBASA, Tomasz DRÓŹDŹ, Bartłomiej WIŚNIEWSKI</b> - Wykorzystanie emisji fotonowej do identyfikacji stopnia zanieczyszczenia mikrobiologicznego płynnych substancji biologicznych	161
31	<b>Łukasz MACIURA, Wojciech ROSA, Dariusz WÓJCIK, Tomasz Rymarczyk, Michał MAJ, Edward KOZŁOWSKI</b> - Nowy algorytm segmentacji 3D płuc na seriach z tomografii komputerowej bazujący na Chan – Vese 2D	165
32	<b>Tomasz RYMARCZYK, Grzegorz KŁOSOWSKI, Edward KOZŁOWSKI, Jan SIKORA, Przemysław ADAMKIEWICZ I</b> - Algorytmiczne metody poprawy obrazowania wnętrza wałów przeciwpowodziowych z wykorzystaniem tomografii elektrycznej	169
33	<b>Andrzej KRAWCZYK, Ewa KORZENIEWSKA</b> - Elektromagnetyzm stosowany i obliczeniowy w Polsce w dwustulecie odkrycia Oerstedą	173
34	<b>Witold SYGOCKI, Ewa KORZENIEWSKA</b> - Czy warto publikować po chińsku? – odpowiedzi na przykładach artykułów z zakresu BHP i elektromagnetyzmu indeksowanych w wybranych bazach	177

## Substantiation of modes of drying alfalfa pulp by active ventilation in a laboratory electric dryer

**Abstract.** The article presents theoretical and experimental studies to determine the rational modes of the drying process of alfalfa pulp. Theoretical research was based on the basic laws of drying of capillary – porous bodies which include alfalfa pulp. Experimental studies were conducted in a laboratory installation, which recorded the main mode parameters of the process, such as temperature, relative humidity and consumption of the drying agent (air), the specific gravity of the load layer of the material, its current moisture content. The obtained dependences of the total duration of the process can be used in the design of plants for drying pulp from alfalfa and other similar materials.

**Streszczenie.** W artykule przedstawiono badania teoretyczne i eksperymentalne mające na celu określenie racjonalnych trybów procesu suszenia miazgi lucerny. Badania teoretyczne oparto na podstawowych prawach suszenia kapilar – ciał porowatych zawierających miazgę lucerny. Badania eksperymentalne przeprowadzono na instalacji laboratoryjnej, w której rejestrowano główne parametry modowe procesu, takie jak temperatura, wilgotność względna i zużycie środka suszącego (powietrza), ciężar właściwy warstwy obciążonej materiału, jego aktualna wilgotność. Otrzymane zależności całkowitego czasu trwania procesu można wykorzystać w projektowaniu instalacji do suszenia pulpy z lucerny i innych podobnych materiałów. (Analiza sposobów suszenia miazgi lucerny przez aktywną wentylację w laboratoryjnej suszarce elektrycznej)

**Keywords:** periods of drying, process parameters, specific load of pulp material, warm air.

**Słowa kluczowe:** suszenie miazgi lucerny, gorące powietrze.

### Introduction

The number of vegetarians on the Earth is gradually increasing. But not so fast that humanity could do without livestock products. For example, in Ukraine the vegetarians are now accounted for just over 5%. Thus, the production of animal products is an important problem that cannot be solved without advanced feed production. After all, due to the shortage of quality feed, 4 million tons of milk and almost 0.2 million tons of meat are under produced annually in Ukraine [1, 2]. It should be noted that now the most important task is to provide quality feed, such feed that has a high coefficient of digestibility.

Traditional types of feed (hay, haylage, silage, etc.) can not provide the required level of digestibility, especially for new highly productive breeds of animals [3]. This problem can be solved by supplementing the traditional diet with new high-energy feeds [4].

### Analysis of literary sources and problem statement

The digestibility of feed nutrients is affected by the ratio in the diet between digestible protein and without nitrogenous substances [5]. A rational combination of amino acid composition and high energy value can be achieved by fractional processing of green mass of alfalfa, which helps to obtain two main components: protein-vitamin paste and pulp [6]. The authors have already focused in [7] on the technology of fractional processing of alfalfa and the nutritional qualities of the feed, so let's move on to the question of drying one of the fractions, namely the one that comes out after squeezing the crushed plant mass. Why is the drying of the pulp? For efficient use of feed fractions, they need to be accumulated, stored, and therefore somehow preserved. The most common way of preserving feed is their drying, so the process of bringing the moisture content of the material to a level at which it can be stored for a long time without damage of its quality [8].

However, the loss of nutrients, and also the quality of feed, energy consumption for the drying process depend on the method and mode parameters of the process, which must be scientifically justified for specific production conditions. One of the effective and widespread methods of

drying similar materials is active ventilation with atmospheric or heated air of a fixed dense layer of material. Knowledge of the laws of the drying process in a dense layer will allow you to control this complex process, to identify ways to make fuller use of the drying potential of air, to determine the rational flow of air blown through the layer of material.

General theoretical issues of transformation of heat and substance during the drying process are solved for bodies of classical form. But in the real case it is necessary to simplify this process a little and to accept certain assumptions [8, 9].

For example, in [10] the process of drying leaf-stem materials is studied only from the point of view of mass exchange processes, in [11] the internal heat source is taken into account, which is in a thick layer, in [12] it is developed an analytical mathematical model of heating and drying processes of plant materials in thick stationary layer whose density varies in height. In [13] the issue of modeling of drying modes of dispersed materials in real dryers of column type is considered. These and many other theoretical studies are implemented in real machines, units for processing and storage of crop products [14, 15].

### Purpose and tasks of research

The aim of the research is to increase the efficiency of use of alfalfa feed by determining the rational parameters of the drying process of one of the components of fractional processing – alfalfa pulp.

But despite such a wide range of theoretical and experimental studies, as we have already indicated, in each case it is necessary to conduct research to substantiate the method and determine the rational parameters of the drying process of vegetable raw materials. So, such studies on the drying of alfalfa processed products are relevant.

Improving the efficiency of the drying process of products of fractional processing of alfalfa by obtaining analytical dependences for the analysis of the drying process with their subsequent use, to justify the operating parameters of the real drying equipment.

## Materials and methods

Most wet plant materials and their components, including pulp from green alfalfa plants, belong to capillary-porous bodies. The drying curves of these bodies have two distinct periods: constant and falling velocities.

The equation of the drying speed curve in the first period has the form [16, 17, 18]:

$$(1) \quad -\frac{dw}{d\tau} = N = const,$$

where  $\frac{dw}{d\tau}$  – drying speed  $\frac{kg_{moist}}{kg_{a.c.p} \cdot hours}$ ;  $N$  – drying speed in the first period;  $\tau$  – time, hours.

Analysis of the results of experimental studies shows that to describe the drying process of alfalfa pulp in the second period, you can use the equation [16, 17]:

$$(2) \quad \frac{dw}{d\tau} / N = \Psi = \frac{(W - W_p)^m}{A + \beta (W - W_p)^m},$$

where  $\Psi$  – common drying speed;  $W$ ,  $W_p$  – current and equilibrium moisture content of the material,  $\frac{kg_{moist}}{kg_{a.c.p}}$ .

We have already written about the equilibrium moisture content of products of fractional processing of alfalfa in [6]. The exponent of degree  $m$  characterizes the relationship of moisture with the material or the index of internal diffusion of moisture and does not depend on the parameters of the layer and the moisture content of the material.

Dimensionless coefficients  $A$  and  $\beta$  depend on the parameters of the material layer (mainly on its thickness).

The time during which the average moisture content of the material layer decreases from the initial  $W_0$  to the final  $W_2$  value, consists of the duration of drying in the first  $\tau_1$  and the second  $\tau_2$  periods:

$$(3) \quad \tau = \tau_1 + \tau_2.$$

Let's integrate equation (1) in the range from  $W_0$  to  $W_{cr}$ , and equation (2) from  $W_{cr}$  to  $W_2$ , and as a result we obtain expressions to determine the drying time of alfalfa pulp, respectively, in the first and second periods:

$$(4) \quad \tau_1 = \frac{W_0 - W_{cr}}{N},$$

$$(5) \quad \tau = \frac{1}{N} \left[ A \int_{W_2}^{W_{cr}} \frac{dw}{(w - W_p)^m} + \beta (W_{cr} - W_2) \right],$$

where  $W_{cr}$  – the average critical moisture content of the material layer,  $kg / kg$ , so the moisture content at which the first drying period passes into the second.

After substituting in equation (3) the values of  $\tau_1$  and  $\tau_2$  from (4) and (5), as well as taking into account that for capillary-porous bodies, which include alfalfa pulp, the exponent  $m = 1$  [17], we obtain the equation to determine the total drying time of the pulp layer:

$$(6) \quad \tau = \frac{1}{N} \left[ W_0 - W_{cr} + A \ln \frac{W_{cr} - W_p}{W_2 - W_p} + \beta (W_{cr} - W_2) \right].$$

In equation (6), the coefficients  $A$  and  $\beta$ , the values of critical and equilibrium moisture content are determined experimentally.

The drying speed of the material in the first period  $N$  depends on the parameters of the layer (height, its density) and the coolant (temperature, humidity, speed and flow rate) [18, 19].

As a result of analytical researches the criterion equation by means of which it is possible to define  $N$  was received:

$$(7) \quad N_{uv} = B \left( \frac{\nu \rho_n l}{\mu g} \right)^{K_1} \left( \frac{H}{l} \right)^{K_2},$$

where  $\nu$  – air speed and free section;  $\rho_n$  – air density;  $l$  – the determining size of the particles (uses, as a rule, the weighted average particle length);  $\mu$  – dynamic air viscosity;  $H$  – layer height;  $B^{K_1}$ ,  $B^{K_2}$  – constants that are determined experimentally.

In equation (7)  $N_{uv}$  is a modified Nusselt criterion for the volumetric heat transfer coefficient. Its value can be determined from the following equation [17]:

$$(8) \quad N_{uv} = \frac{\rho_o l^2}{\lambda_n} \cdot \frac{N}{\Delta P},$$

where  $\rho_o$  – the density of the particles therefore in their natural structural state;  $\lambda_n$  – coefficient of mass conductivity of the air;  $\Delta P$  – average difference in partial vapor pressure near the surface of the particles and in the air.

From equations (7) and (8) we can obtain an expression for determining the drying speed in the first period:

$$(9) \quad N = B \frac{\lambda_n \Delta P}{\rho_o l^2} \cdot \left( \frac{\nu \rho_n l}{\mu g} \right)^{K_1} \cdot \left( \frac{H}{l} \right)^{K_2},$$

The average difference of partial pressures  $\Delta P$  in equation (9) can be expressed through the initial drying potential which is characterized by the difference between the moisture content of adiabatically saturated air and that entering the layer; the height of the layer  $H$  – due to the specific load of the material per unit plane of the grid on which it is located; air velocity on the free section  $V$  – due to the specific air flow rate  $G_n$ , so

$$(10) \quad \Delta P = z_1 (d_H - d_1) = z_1 \Delta d_1; \quad H = z_2 \cdot \rho; \quad V \rho_n = z_3 G_n \rho_n,$$

where  $z$ ,  $z_2$ ,  $z_3$  – coefficient of proportionality.

After some transformations, equation (9) gets:

$$(11) \quad N = (G_n \rho_n)^k p^{k_2} \Delta d_1 \left[ \frac{B z_1 z_2^k z_3^{k_1} \lambda_n}{\mu \cdot g \cdot \rho_o l^{2-k_1}} \right].$$

After substituting the value of  $N$  from equation (6) from equation (11), we obtain the equation for determining the total duration of drying of the pulp layer:

$$(12) \quad \tau = \frac{W_0 - W_{cr} + A \ln \frac{W_{cr} - W_p}{W_2 - W_p} + \beta (W_{cr} - W_2)}{G_n \rho_n^{k_1} p^{k_2} \Delta d_1 \left[ \frac{B z_1 z_2^k z_3^{k_1} \lambda_n}{\mu \cdot g \cdot \rho_o l^{2-k_1}} \right]}.$$

This analytical dependence determines the total drying time from a number of parameters, including initial, critical, equilibrium and final moisture content, specific flow rate of air blown through the material layer, specific load of the material layer, temperature and humidity, physical and chemical properties of the material  $m = 1$ ,  $A$  and  $\beta$ .

The initial moisture content is determined by the degree of mechanical extraction of green plants. This moisture content, as well as the final, are set by the conditions of the technological process. The initial drying potential of air is determined by the  $I-d$  diagram, based on the average values of its temperature and humidity. The values of the exponents  $k_1$  and  $k_2$ , as well as the coefficients  $A$ ,  $\beta$ ,  $B$ ,  $z_1$ ,  $z_2$ ,  $z_3$  are determined experimentally.

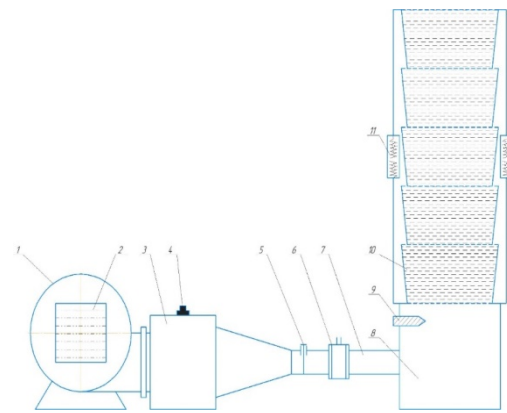


Fig. 1. The scheme of laboratory installation: 1 – the fan; 2 – electric heater; 3 – distribution chamber; 4 – temperature regulator; 5 – valve; 6 – diaphragm; 7 – air duct; 8 – mixing chamber; 9 – temperature sensor; 10 – loading container; 11 – device for sealing containers.

Experimental studies of the drying process of alfalfa pulp in a thick layer were performed on a laboratory installation, the scheme of which is shown in (Fig. 1).

The main elements of the laboratory installation are the fan 1 Ts 4-70 № 8, electric heater 2 PNE-67.5, distribution chamber 3, air duct 7, containers with mass 10, shut-off, regulating and measuring equipment. The air flow was monitored by means of a diaphragm 6 mounted on a straight section of the air duct 7. In the mixing chamber 8 is installed a thermometer 9 to monitor the air temperature at the inlet to the drying chamber. In the chamber are placed 5-10 (depending on the required height of the layer of container material) 10 for samples of the test material. They have the shape of a truncated quadrangular pyramid with an angle of inclination of the side surface of  $5^\circ$ , a height of  $0.2\text{ m}$  and an area of the lower base of  $0.1\text{ m}^2$ .

The bottom of each container is made of the net of mesh with  $1.5 \times 1.5\text{ mm}$  meshes, around the perimeter of which is glued with soft rubber. Sealing between the containers is provided by a tensioning device 11, and the side walls of the containers are insulated.

To automatically control the temperature of the drying agent (air) is used a sensor 4 [20, 21] installed in the distribution chamber 3. The laboratory unit has three drying columns for the experiment in three replications [22]. The air velocity in the working part of the channel was measured using a diaphragm and a traction meter. Simultaneously, psychrometric thermometers with a separation price of  $0.2$  degrees measured the air temperature at the entrance to the material layer.

The moisture content of the material during drying was determined by periodic weighing of containers with samples on laboratory scales TVE-12-05 [23]. The initial and final moisture content of the material was determined according to the standard method of DSTU 29144:2009 [24].

The mode parameters of the material (alfalfa pulp) and drying agent (air) during the experiments were as follows: the average initial temperature of the drying agent varied sequentially with an interval of  $10$  degrees from  $297$  to  $327\text{ K}$ , specific air flow – at intervals of  $200$ - $300\text{ m}^3 / (\text{h} \cdot \text{m}^2)$  from  $340$  to  $1600\text{ m}^3 / (\text{h} \cdot \text{m}^2)$ , and the specific load of the material layer varied from  $7$  to  $100\text{ kg} / \text{m}^2$ .

## Research results

Analysis of a large number of curves obtained at different modes allowed to determine the individual dependences of the drying rate in the first period and the total drying time of the alfalfa pulp layer on the initial drying potential (Fig. 2), specific air flow, specific layer load.

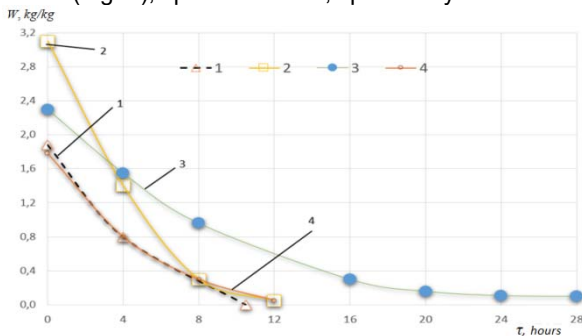


Fig. 2. Kinetics of drying from the initial drying potential  $\Delta d$  ( $\text{g.moist./kg.sp.}$ ) at  $P_{sh} = 21.0\text{ kg} / \text{m}^2$ ;  $G_n = 500\text{ m}^3 / \text{year}$ : 1 – 10.2; 2 – 4.5; 3 – 6.7; 4 – 10.0.

It is established that the drying rate of the layer in the first period is directly proportional to the initial drying potential of air:  $N \sim \Delta d$ , which agrees with equation (11). With an increase in the specific flow of air that is blown

through the layer of material, there is a significant decrease in the duration of drying (Fig. 3).

If we construct the dependence of  $N$  from  $G_n \rho_n$ , in logarithmic coordinates, we obtain a straight line whose tangent of the angle of inclination to the abscissa axis is equal to the exponent  $K_1$  of equations (11) and (12). Within the range of  $G_n$  from  $340$  to  $1300\text{ m}^3 / \text{h}$   $K_1 = 0.65$ , so  $N \sim \rho_n G_n^{0.65}$ . When analyzing the effect of the specific load of the alfalfa pulp layer on the drying speed and duration of the process, it was found that the slope of the drying curves decreases with increasing specific load (Fig. 4). The average drying speed decreases sharply (Fig. 5).

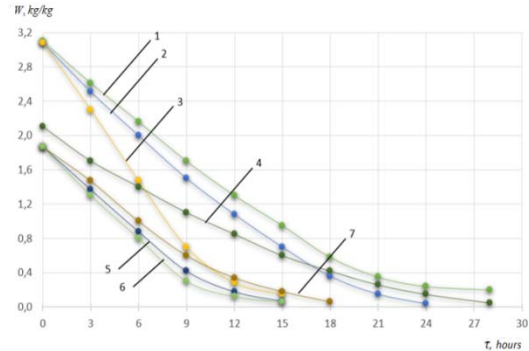


Fig. 3. Drying kinetics from proportion air flow  $G_n$  ( $\text{m}^3 / \text{h}$ ) at  $P_{sh} = 44.2\text{ kg} / \text{m}^2$ ;  $\Delta d = 10\text{ gr.moist} / \text{kg.sp.}$ : 1 – 500; 2 – 560; 3 – 1115; 4 – 340; 5 – 875; 6 – 910; 7 – 480.

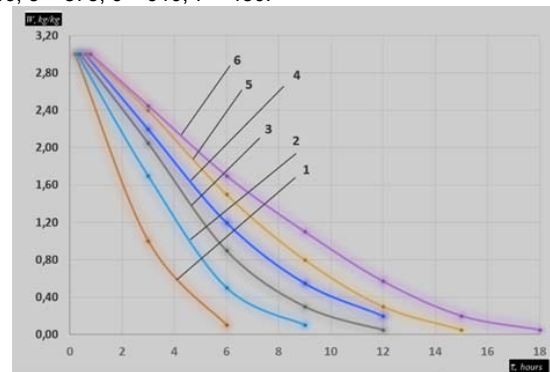


Fig. 4. Kinetics of drying from the proportion of specific load of the material  $P_{sh}$  ( $\text{kg} / \text{m}^2$ ) at  $\Delta d = 10,1\text{ gr.moist.} / \text{kg.sp.}$ ,  $G_n = 500\text{ m}^3 / \text{h}$ : 1 – 13.8; 2 – 21.6; 3 – 28.9; 4 – 36.1; 5 – 43.5; 6 – 50.5.

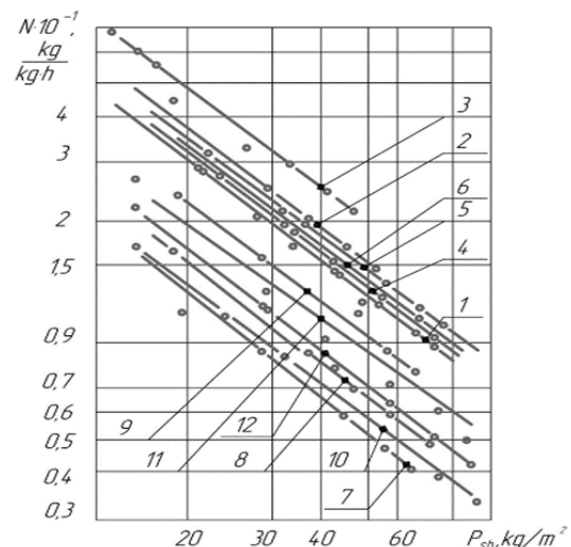


Fig. 5. The dependence of the drying rate of the material in the first period from the proportion of the specific load (experimental conditions are given in table. 1).

From fig. 5 it is shown that regardless of the drying mode, the dependence of  $N$  from  $P$  are parallel lines. The tangent of the angle of inclination of these lines to the abscissa is numerically equal to the exponent  $K_2$  of equations (11) and (12) and is - 0.972, so it is approaching to - 1. The multiplier in square brackets in these equations when changing the mode parameters of the layer and air remains constant and is equal to 0.0107.

Table 1. Conditions for conducting experiments.

№	Mode parameters of the material layer and air					
	$t_1, K$	$\varphi, \%$	$Gp, m^3 / h$	$\Delta d, g_{moist} / kg_{s.p.}$	$W_0, kg / kg$	$K_2$
1	320.8	11.0	500	9.35	3.10	0.96
2	326.6	7.5	560	10.90	3.10	0.92
3	324.2	9.0	1115	10.40	3.10	0.98
4	333.7	15.0	1060	7.60	1.88	0.99
5	315.1	14.0	1000	8.30	1.88	0.99
6	312.9	16.0	1040	7.50	1.88	0.97
7	302.1	38.0	340	4.00	2.28	0.95
8	303.3	35.0	480	4.40	2.28	0.93
9	303.5	35.5	980	4.60	2.28	0.95
10	297.4	45.0	560	2.80	1.62	0.94
11	298.9	44.0	972	3.40	1.62	0.98
12	304.0	32.5	1094	3.31	1.62	0.86

Thus, the processing of experimental data allowed to obtain the following equation to determine the drying rate of the layer in the first period.

$$(13) \quad N = \frac{0.0107}{P_{sh}} \Delta d_1 (G_n \rho_n)^{0.65}.$$

For further research, we will make some transformations in equation (5): let's take the integral, and then multiply both parts of the equation by  $N / (W_{cr} - W_2)$  and for  $m = 1$  we obtain:

$$(14) \quad \frac{N\tau_2}{W_{cr} - W_2} = \frac{A}{W_{cr} - W_2} \ln \frac{W_{cr} - W_p}{W_2 - W_p} + \beta.$$

To determine the coefficients  $A$  and  $\beta$  we have built by experimental curves of drying time for different values  $W_2$  the dependence of the value  $N\tau_2 / (W_{cr} - W_2)$  as a function from:

$$\left( \frac{1}{W_{cr} - W_2} \cdot \ln \cdot \frac{W_{cr} - W_p}{W_2 - W_p} \right) \text{ when } P_{sh} = \text{const.}$$

The result is a straight line which on the y-axis cuts a segment equal to  $\beta$ , and the tangent of the angle of inclination of this line to the abscissa determines the coefficient  $A$ .

It is established that the value of the coefficients  $A$  and  $\beta$  is influenced by the specific load of the material. The dependence of these coefficients on the value of  $P_{sh}$  is shown in (Fig. 6).

Presented in Fig. 6 (a, b) dependences can be described by empirical dependencies:

$$(15) \quad A = 13.25 \cdot P_{sh}^{-1}.$$

$$(16) \quad \beta = 0.24 (P_{sh} - 10)^{0.3}.$$

The results of processing of experimental data allow to obtain analytical dependences to determine the main operating parameters of the drying process of alfalfa pulp in a thick layer. For example, the required specific air flow rate can be determined from the following dependence:

$$(17) \quad G_n = \left\{ \frac{[W_0 - W_{cr} + \ln \frac{W_{cr} - W_p}{W_2 - W_p} + \beta (W_{cr} - W_2) \cdot P_{sh}]^{1.54}}{0.0107 \rho_n^{0.65} \Delta d_1 \cdot \tau} \right\}.$$

Similarly, you can get the dependences to determine the drying time in the first and second period for any current moisture content  $W$ :

$$(18) \quad \tau_1 = \frac{P_{sh} (W_0 - W_{cr})}{0.0107 (\rho_n \cdot G_n)^{0.65} \Delta d_1}.$$

$$(19) \quad \tau_2 = \frac{[13.5 \ln \frac{W_0 - W_p}{W - W_p} + 0.24 P_{sh} (P_{sh} - 10)^{0.3} (W_0 - W)]}{0.0107 (\rho_n G_n)^{0.65} \Delta d_1}.$$

From equations (18) and (19) it follows that the duration of the drying process of the alfalfa pulp layer in the first period does not depend on the properties of the material, but is a function of temperature, humidity and specific air flow, as well as specific load per unit area of the dryer. In the second period, the duration of the drying process, in addition to these factors, depends on the properties of the material, which is taken into account by the coefficients  $m$ ,  $A$ ,  $\beta$ .

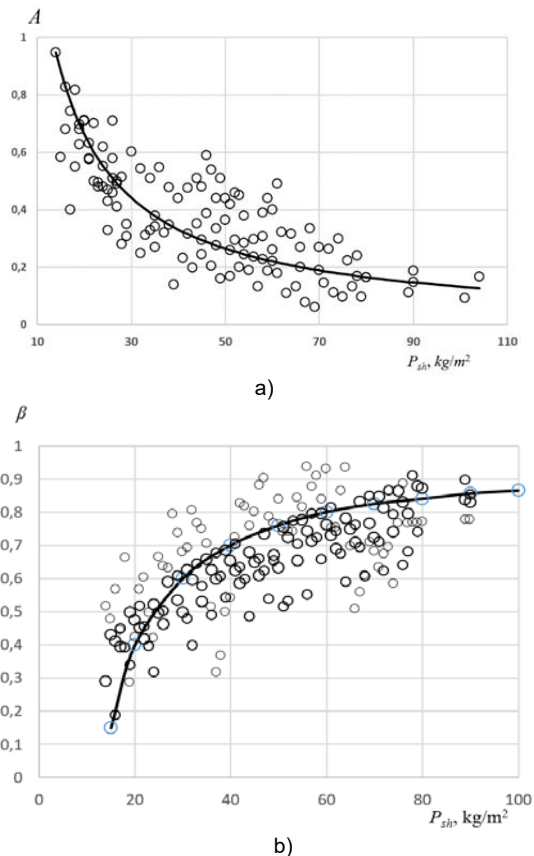


Fig. 6. Dependence of dimensionless coefficients  $A$  (a) and  $\beta$  (b) on the specific load of the material.

To verify the obtained analytical dependences, the calculated data on the drying time of the pulp layer were compared with experimental ones. The experimental conditions are given in table 1. It is established that the deviation of the experimental and calculated values of the drying time is within  $\pm 9\%$ , which is an acceptable result for such processes.

Thus, according to the known temperature and humidity, the average initial moisture content of the material, the specific load of the material layer per unit area of the dryer, the drying time, you can use dependence (17) to determine the rational flow of air blown through the layer. So you can choose a rational equipment (fan) when designing plants for drying pulp.

Equilibrium  $W_p$  and critical  $W_{cr}$  moisture content are also present in the analytical dependences. The authors have already written about the equilibrium moisture content and methods of its determination [5]. The critical moisture content of the material can be determined from the expression for the consolidated drying rate  $\Psi$ , which at  $W = W_{cr}$  is equal to one. From equation (2) taking into account (15) and (16) we obtain:

$$(20) \quad W_{cr} = \frac{13.25}{P_{sh} - 0.24 P_{sh}(P_{sh}-10)^{0.3}} + W_p.$$

As you can see, the critical moisture content (so the moisture content at which the first drying period ends and the second begins) does not depend on the properties of the material, as mentioned above (formula 18).

## Conclusions

Duration of drying in the first period of alfalfa pulp in the thick layer does not depend on the properties of the material, but only from the parameters of the layer and air that blows it.

We have obtained the dependences for determining the rational parameters of the drying process of alfalfa pulp. These dependences can be used to select the equipment of the dryer for drying alfalfa pulp.

**Acknowledgements.** This research was supported and funded by the Ministry of Education and Science of Ukraine under grant No. 0121U108589.

**Authors:** SPIRIN Anatolii – PhD in Engineering, Associate Professor, Faculty of Engineering and Technology, Vinnytsia National Agrarian University (21008, 3 Sonyachna str., Vinnytsia, Ukraine, e-mail: [spirinanatoly1@gmail.com](mailto:spirinanatoly1@gmail.com)); KUPCHUK Ihor – PhD in Engineering, Associate Professor, Deputy Dean for Scientific Research, Faculty of Engineering and Technology, Vinnytsia National Agrarian University (21008, 3 Sonyachna str., Vinnytsia, Ukraine, e-mail: [kupchuk.igor@i.ua](mailto:kupchuk.igor@i.ua)); TVERDOKHLIB Ihor – PhD in Engineering, Associate Professor, Faculty of Engineering and Technology, Vinnytsia National Agrarian University (21008, 3 Sonyachna str., Vinnytsia, Ukraine, e-mail: [igor.tverdokhlib@yahoo.com](mailto:igor.tverdokhlib@yahoo.com)); POLIEVODA Yurii – PhD in Engineering, Associate Professor, Faculty of Engineering and Technology, Vinnytsia National Agrarian University (21008, 3 Sonyachna str., Vinnytsia, Ukraine, e-mail: [vinyura36@gmail.com](mailto:vinyura36@gmail.com)); KOVALOVA Kateryna – PhD in Pedagogical, Associate Professor, Department of Ukrainian and foreign languages, Vinnytsia National Agrarian University (21008, 3 Sonyachna str., Vinnytsia, Ukraine, e-mail: [katrin.viter@gmail.com](mailto:katrin.viter@gmail.com)); DMYTRENKO Victor – PhD in Engineering, Senior Research Fellow, Institute of Potato Growing, The National Academy of Agrarian Sciences of Ukraine (07853, 22 Chkalova st., Nemishayeve, Borodyansky district, Kyiv region, Ukraine, e-mail: [Vik8320@meta.ua](mailto:Vik8320@meta.ua)).

## REFERENCES

- Petrova Z., Paziuk V., Tokarchuk O., Polievoda Y. Special aspects of soybean drying with high seedling vigor, UPB Scientific bulletin, Series D: Mechanical Engineering, University Politehnica of Bucharest, 83 (2021), nr. 2, 327–336.
- Mazur V., Tkachuk O., Panytsyeva H., Kupchuk I., Mordvaniuk M., Chynchyk O. Ecological suitability peas (*Pisum Sativum*) varieties to climate change in Ukraine, *Agraarteacus*, 32 (2021), nr 2, 276–283. <https://doi.org/10.15159/jas.21.26>
- Snezhkin J., Paziuk V., Petrova Zh., Tokarchuk O. Determination of the energy efficient modes for barley seeds drying. *INMATEH - Agricultural Engineering, Romania*, 61, (2020), nr. 2, 183–193.
- Kaletnik G., Honcharuk I., Okhota Y. The Waste-free production development for the energy autonomy formation of Ukrainian agricultural enterprises, *Journal of Environmental Management and Tourism*, 11 (2020), nr. 3, 513–522. DOI: 10.14505/jemt.v11.3(43).02.
- Poberezhets Ju., Chudak R., Kupchuk I., Yaropud V., Rutkevych V. Effect of probiotic supplement on nutrient digestibility and production traits on broiler chicken, *Agraarteacus*, 32 (2021), nr. 2, 296–302. DOI: 10.15159/jas.21.28.
- Spirin A. V., Tverdokhlib I. V. Equilibrium moisture content of alfalfa processing products, *Vibrations in engineering and technology*, 96 (2019), nr. 1, 118–122.
- Paziuk V., Vyshnevskiy V., Tokarchuk O., Kupchuk I. Substantiation of the energy efficient schedules of drying grain seeds, *Bulletin of the Transilvania University of Braşov, Series II: Forestry, Wood Industry, Agricultural Food Engineering*, 63 (2021), nr. 14, 137–146. DOI: 10.31926/but.fwiafe.2021.14.63.2.13.
- Haponiuk O. I., Ostapchuk M. V., Stankevych H. M., Haponiuk I. I. Active ventilation and grain drying, *Odessa, Polihraf*, (2014), 324 p.
- Kotov B., Spirin A., Kalinichenko R., Bandura V., Polievoda Y., Tverdokhlib I. Determination the parameters and modes of new heliocollectors constructions work for drying grain and vegetable raw material by active ventilation, *Czech Academy of Agricultural Sciences, Prague, Research in Agricultural Engineering*, 65 (2019), nr. 1, 20–24. <https://doi.org/10.17221/73/2017-RAE>.
- Kotov . I., Kuzmenko V. F. Mathematical model of the dynamics of drying of leaf-stem materials in active ventilation, *Proceedings of the Tavriya State Agrotechnological University*, 13 (2013), 32–38.
- Palamarchuk I. P., Tsurkan O. V., Prysyzhnyuk D. V., Polievoda Y. A. Substantiation of the scheme of the vibroozonating dryer for post-harvest processing of grain, *Scientific works of the National University of Food Technologies*, 22 (2016), nr. 6, 151–156.
- Kotov B. I., Spirin A. V., Kalinichenko R. A. Warmth and mass transfer when dry silky and agricultural materials in a crappy, unstable ball, *Machinery, energy and transport of agro-industrial complex*, 94 (2016), nr. 2, 41–44.
- Kotov B. I., Kalinichenko R. A., Spirin A. V. Modeling the modes of drying of dispersed materials in continuous column dryers, *Machinery, energy and transport of agro-industrial complex*, 6 (2016), 69–74.
- Paziuk V. M., Petrova Zh. O., Tokarchuk O. A., Yaropud V. M. Research of rational modes of drying rape seed, *INMATEH – Agricultural Engineering, Romania*, 58 (2019), nr. 2, 303–310.
- Paziuk V. M., Liubin M. V., Yaropud V. M., Tokarchuk O. A., Tokarchuk D. M. Research on the rational regimes of wheat seeds drying, *INMATEH – Agricultural Engineering, Romania*, 56 (2018), nr. 3, 39–48.
- Bandura V., Kalinichenko R., Kotov B., Spirin A. Theoretical rationale and identification of heat and mass transfer processes in vibration dryers with IR-energy supply, *Eastern-European Journal of Enterprise Technologies*, 94 (2018), nr.4, 50–58.
- Kotov B. I., Spirin A. B., Tverdokhlib I. V., Polievoda Y. A., Hryshchenko V. O., Kalinichenko R. A. Theoretical researches on cooling process regularity of the grain material in the layer, *INMATEH – Agricultural Engineering*, 54 (2018), nr. 1, 87–94.
- Gunko I., Hraniak V., Yaropud V., Kupchuk I., Rutkevych V. Optical sensor of harmful air impurity concentration. *Przegląd Elektrotechniczny*, 7 (2021), 76–79. doi:10.15199/48.2021.07.15.
- Kuznietsova I., Bandura V., Paziuk V., Tokarchuk O., Kupchuk I. Application of the differential scanning calorimetry method in the study of the tomato fruits drying process, *Agraarteacus*, 31 (2020), nr. 2, 173–180. DOI: 10.15159/jas.20.14.
- Hraniak, V. F., Kukharchuk, V. V., Bogachuk, V. V., Vedmitskiy Y. G. at all. Phase noncontact method and procedure for measurement of axial displacement of electric machine's rotor. *Proc. SPIE 10808, Photonics Applications in Astronomy, Communications, Industry, and High-Energy Physics Experiments 2018*, 7 p. <https://doi.org/10.1117/12.2501611>
- Borysiuk D., Spirin A., Kupchuk I., Tverdokhlib I., Zelinskiy V., Smyrnov Ye., Ognevyy V. The methodology of determining the place of installation of accelerometers during vibrodiagnostic of controlled axes of wheeled tractors. *Przegląd Elektrotechniczny*, 97(2021), nr 10, 44–48. <https://doi.org/10.15199/48.2021.10.09>
- Kupchuk I., Yaropud V., Hraniak V., Poberezhets Ju., Tokarchuk O., Hontar V., Didyk A. Multicriteria compromise optimization of feed grain grinding process. *Przegląd Elektrotechniczny*, 97 (2021), nr 11, 179–183. <https://doi.org/10.15199/48.2021.11.33>
- Rutkevych V., Kupchuk I., Yaropud V., Hraniak V., Burlaka S. Numerical simulation of the liquid distribution problem by an adaptive flow distributor. *Przegląd Elektrotechniczny*, 98 (2022), nr 2, 64–69. <https://doi.org/10.15199/48.2022.02.13>
- Yanovych V., Honcharuk T., Honcharuk I., Kovalova K. Design of the system to control a vibratory machine for mixing loose materials. *Eastern-European Journal of Enterprise Technologies*, 90 (2017), nr 6(3), 4–13.