

Lecture Notes in Civil Engineering

Simone Pascuzzi
Francesco Santoro *Editors*

Farm Machinery and Processes Management in Sustainable Agriculture

XI International Scientific Symposium
2022

 Springer

Lecture Notes in Civil Engineering

Volume 289

Series Editors

Marco di Prisco, Politecnico di Milano, Milano, Italy

Sheng-Hong Chen, School of Water Resources and Hydropower Engineering,
Wuhan University, Wuhan, China

Ioannis Vayas, Institute of Steel Structures, National Technical University of
Athens, Athens, Greece

Sanjay Kumar Shukla, School of Engineering, Edith Cowan University, Joondalup,
WA, Australia

Anuj Sharma, Iowa State University, Ames, IA, USA

Nagesh Kumar, Department of Civil Engineering, Indian Institute of Science
Bangalore, Bengaluru, Karnataka, India

Chien Ming Wang, School of Civil Engineering, The University of Queensland,
Brisbane, QLD, Australia

Lecture Notes in Civil Engineering (LNCE) publishes the latest developments in Civil Engineering—quickly, informally and in top quality. Though original research reported in proceedings and post-proceedings represents the core of LNCE, edited volumes of exceptionally high quality and interest may also be considered for publication. Volumes published in LNCE embrace all aspects and subfields of, as well as new challenges in, Civil Engineering. Topics in the series include:

- Construction and Structural Mechanics
- Building Materials
- Concrete, Steel and Timber Structures
- Geotechnical Engineering
- Earthquake Engineering
- Coastal Engineering
- Ocean and Offshore Engineering; Ships and Floating Structures
- Hydraulics, Hydrology and Water Resources Engineering
- Environmental Engineering and Sustainability
- Structural Health and Monitoring
- Surveying and Geographical Information Systems
- Indoor Environments
- Transportation and Traffic
- Risk Analysis
- Safety and Security

To submit a proposal or request further information, please contact the appropriate Springer Editor:

- Pierpaolo Riva at pierpaolo.riva@springer.com (Europe and Americas);
- Swati Meherishi at swati.meherishi@springer.com (Asia—except China, and Australia, New Zealand);
- Wayne Hu at wayne.hu@springer.com (China).

All books in the series now indexed by Scopus and EI Compendex database!

Simone Pascuzzi · Francesco Santoro
Editors

Farm Machinery and Processes Management in Sustainable Agriculture

XI International Scientific Symposium 2022

 Springer

Editors

Simone Pascuzzi
DiSAAT
University of Bari Aldo Moro
Bari, Italy

Francesco Santoro
DiSAAT
University of Bari Aldo Moro
Bari, Italy

ISSN 2366-2557

ISSN 2366-2565 (electronic)

Lecture Notes in Civil Engineering

ISBN 978-3-031-13089-2

ISBN 978-3-031-13090-8 (eBook)

<https://doi.org/10.1007/978-3-031-13090-8>

© The Editor(s) (if applicable) and The Author(s), under exclusive license to Springer Nature Switzerland AG 2023

This work is subject to copyright. All rights are solely and exclusively licensed by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors, and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, expressed or implied, with respect to the material contained herein or for any errors or omissions that may have been made. The publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

This Springer imprint is published by the registered company Springer Nature Switzerland AG
The registered company address is: Gewerbestrasse 11, 6330 Cham, Switzerland

Preface

The Russian-Ukrainian war is the most serious geopolitical conflict since the Second World War and will have certainly more significant global consequences than the previous financial or health crises suffered in the last twenty years.

In this particular critical moment, it is necessary to carefully analyze and evaluate the foreseeable repercussions on food and energy supplies and the potential impact on the international scene. At the same time, it appears indispensable and urgent to respond flexibly to current dynamics and make strategic choices consistent with long-term interests.

The direct and indirect criticalities generated by the difficult situation that has developed in recent times have already determined negative impacts on the current management of agricultural production and food products, with high-risk consequences for the stability of numerous agri-food chains.

These critical issues immediately have a different impact depending on the sector such as, for example:

- for cereal crops, protein, and oil crops, there is the sudden unavailability of raw materials due to the closure of important markets, the consequent sharp rise in prices also due to limitations in logistics and procurement;
- in the fruit and vegetable sector, there may be an oversupply on domestic markets and a drop in the remuneration of producers;
- in the nursery and horticultural sector in hot greenhouses, the interruption of production processes may occur due to the increase in fuel prices for heating;
- in breeding, the unavailability of basic raw materials for the production of feed and therefore for nutrition, also exacerbated by an unsustainable increase in energy costs, could lead to the impossibility of completing the production cycles, forcing farmers to resort to the slaughter of heads in full production.

In the medium to long terms, these criticalities can aggravate some structural problems of agricultural systems such as, for example:

- the growing dependence on foreign countries for genetic materials (varieties and hybrids) used for national crops, such as corn and wheat;

- the continuing difficult situation for many companies linked to the scarce availability of necessary manpower and production costs that often exceed the remuneration of the products;
- the increase in fuel costs, with an immediate impact on fruit processing and conditioning plants and on transport to markets.

In this difficult and cyclical phase of instability, the eleventh edition of the “Farm Machinery and Process Management in Sustainable Agriculture” International Symposium was an opportunity to present and discuss some proposals based on objective criteria to be implemented in the short and medium terms to address the main problems and possible solutions for agriculture and for the entire agri-food system.

The FMPMSA International Symposium, in large part, in responding to the ambitious goal of proposing scientific and technological solutions as well as structural measures useful for increasing the resilience of agri-food systems.

Bari, Italy

Simone Pascuzzi
Francesco Santoro

Contents



The Structure of Engine Power of Agricultural Tractors Registered in Poland Between 2010 and 2020	1
Artur Przywara, Artur Kraszkiewicz, Milan Koszel, Atanas Zdravkov Atanasov, and Stanisław Parafiniuk	
Tillage Quality and Draught Force of a Novel Plough Concept with Cambered Disc	15
Gerhard Moitzi, Christian Rechberger, Franz-Ferdinand Huber, Matthias Trimmel, and Helmut Wagentristsl	
Theoretical Study of the Trajectory of Movement of a Ploughing Aggregate with a Reversible Plough on the Headlands	27
Volodymyr Bulgakov, Simone Pascuzzi, Valerii Adamchuk, Volodymyr Nadykto, Semjons Ivanovs, Aivars Aboltins, Hryhoriy Kaletnik, Francesco Santoro, Francesco Vicino, and Janusz Nowak	
Research of the Possibilities to Improve the Quality of Potatoes Harvesting by Including an Experimental Heap Leveler-Distributor in the Design of Harvesting Machines	37
Semjons Ivanovs, Volodymyr Bulgakov, Simone Pascuzzi, Valerii Adamchuk, Viktor Kornuchin, Zinovii Ruzhylo, Oleksandra Trokhaniak, Janusz Nowak, Zbigniew Kiernicki, Francesco Santoro, and Oksana Bulgakova	
Theoretical Studies of the Relationship Between the Parameters of the Bridge Tractor and the Engineering Area of the Field	49
Volodymyr Bulgakov, Stanislav Nikolaenko, Simone Pascuzzi, Valerii Adamchuk, Volodymyr Kuvachov, Valentyna Krutyakova, Francesco Santoro, and Janusz Nowak	

Research into Power and Load Parameters of Flexible Screw Conveyors for Transportation of Agricultural Materials	61
Volodymyr Bulgakov, Simone Pascuzzi, Valerii Adamchuk, Jüri Olt, Zinovii Ruzhylo, Oleksandra Trokhaniak, Francesco Santoro, Margus Arak, Janusz Nowak, and Hristo Beloev	
Assessment of a Big Square Baler Able to Reduce Soil Impurities During Baling Process. First Evaluations	77
Arrigo Salvatore Guerrieri, Francesco Santoro, Francesco Vicino, and Simone Pascuzzi	
The Methane Potential of Corn Cob Cores	83
Artur Pawłowski, Dawid Wojcieszak, and Jacek Przybył	
Energy Comparison of Corn Stover Fraction	89
Dawid Wojcieszak, Artur Pawłowski, and Jacek Przybył	
Economic Effects of Food Industry Waste Management in the Context of Sustainable Development	97
Agnieszka Starek-Wójcicka, Monika Stoma, Emilia Osmólska, Leszek Rydzak, and Paweł Sobczak	
Ranking of Plant Biomass by Fuel Value Index	107
Artur Kraszkiewicz, Artur Przywara, Milan Koszel, and Stanisław Parafiniuk	
Energetic Potential of Dairy Cow Breeding in Poland	115
Wiktor Bojarski, Jakub Pulka, Patrycja Pochwatka, Piotr Bresz, Mateusz Nowak, and Jacek Dach	
Effect of Mechanical Treatment on the Efficiency of Methane Fermentation of Biowaste	123
Piotr Bresz, Jakub Pulka, and Wiktor Bojarski	
Effect of Nozzle Condition and Type in the Spray Quality in Wheat Plants	131
Alaa Subr, Marek Milanowski, and Stanisław Parafiniuk	
Problems with System of Sprayers Testing in Poland Based on 20 Years of Experience	139
Zbigniew Czaczyk, Jacek Król, Hubert Nagengast, and Daniel Alankiewicz	
Changes in Soil pH and Their Influence on Sustainable Development in the Agriculture	145
Wioletta Żukiewicz-Sobczak, Paweł Sobczak, Katarzyna Grotkiewicz, Anna Domańska, Jacek Mazur, Patrycja Łusiak, Konrad Żukiewicz, and Małgorzata Bernatek	

Phosphorus Balance Trend in Albania Agriculture During the Period 1950–2019	159
Fran Gjoka, Enkeleda Shkurta, Liri Miho, and Thoma Nasto	
Applicability and Efficiency of Remote Monitoring of Agricultural Crops	169
Asparuh Atanasov, Radko Mihaylov, and Gallina Mihova	
Image Analysis in the Assessment of Homogeneity of Fine-Grained Mixtures	179
Dominika B. Matuszek, Łukasz A. Biłos, and Jolanta B. Królczyk	
The Use of Farm Digital Tools in Crop Production in Wallonia: Situation, Key Points and Actors	191
Thi Minh Hop Ho and Philippe Burny	
Effect of Digestate Fertilization on the Quality of Beans	201
Milan Koszel, Stanisław Parafiniuk, Sławomir Kocira, Atanas Z. Atanasov, Artur Przywara, and Artur Kraszkiewicz	
Online Pest Warning System—Support for Agriculture and Transfer from Science to Practice	209
Tratwal Anna, Jakubowska Magdalena, and Baran Marcin	
Selected Problems on Data Used in Precision Agriculture	217
Edmund Lorencowicz and Jacek Uziak	
Estimation of Workload Level of Dynamic and Static Warehouse Assemblers in Logistic and Ergonomic Aspect	227
Mateusz Gawliński and Katarzyna Łyp-Wrońska	
Monitoring Agrometeorological Factors and Weight of the Bee Hive During Black Locust (<i>Robinia pseudoacacia</i>) Flowering	239
Atanas Z. Atanasov, Ivaylo S. Hristakov, Milan Koszel, and Artur Przywara	
The Impact of Allelic State of <i>dhn1</i> and <i>rsp41</i> Genes on Grain Moisture Content of Maize Hybrids Within Marker Assisted Selection (MAS) for Drought Resistance	253
Larysa Prysiazhniuk, Yurii Honcharov, and Larysa Korol	
Pollen Concentration of <i>Ailanthus Altissima</i> on the South Transdanubia Region in Hungary	265
Viktor J. Vojnich, Árpád Ferencz, Tamás Tóth, Károly Tempfli, and Donát Magyar	
Social Networks for Sustainable Development in Greece: The Case of Messenia	275
Athanasios Papageorgiou	

Theoretical Study of the Trajectory of Movement of a Ploughing Aggregate with a Reversible Plough on the Headlands



Volodymyr Bulgakov, Simone Pascuzzi , Valerii Adamchuk, Volodymyr Nadykto, Semjons Ivanovs, Aivars Aboltins, Hryhoriy Kaletnik, Francesco Santoro , Francesco Vicino, and Janusz Nowak

Abstract Ploughing with reversible ploughs is increasingly used. Their main advantage is that the aggregates based on them allow ploughing without formation of dump ridges and breakup furrows (i.e. ensure formation of a smooth field surface). The trajectory of the movement of the ploughing aggregate with a reversible plough on the headlands has its own specifics and length due to the fact that the aggregate moves across the field in a shuttle way (i.e., processing is constantly carried out at the butt in relation to the previous pass). This trajectory depends on the length of the cultivated field and the working width of the plough. In comparison with the conventional aggregates the total length of the path of movement of the ploughing aggregates with reversible ploughs on the headland under certain conditions may be much larger. As estimated indicators in the work there are taken the total lengths of the trajectories of movement of the ploughing aggregates with reversible and conventional ploughs on the headland. On the basis of theoretical studies comparative calculated graphic

V. Bulgakov

National University of Life and Environmental Sciences of Ukraine, Kyiv, Ukraine

S. Pascuzzi (✉) · F. Santoro · F. Vicino

Department of Agricultural and Environmental Science, University of Bari Aldo Moro, Bari, Italy
e-mail: simone.pascuzzi@uniba.it

V. Adamchuk

Institute of Mechanics and Automation of Agricultural Production of the National Academy of Agrarian Sciences of Ukraine, Glevakha, Vasylykiv District, Kyiv Region, Ukraine

V. Nadykto

Dmytro Motornyi Tavsia State Agrotechnological University, Melitopol, Ukraine

S. Ivanovs · A. Aboltins

Latvia University of Life Sciences and Technologies, Jelgava, Latvia

H. Kaletnik

Vynnytsia National Agrarian University, 3 Soniachna Str., Vynnytsia UA 21008, Ukraine

J. Nowak

Department of Operation of Machines and Management of Production Processes, University of Life Sciences in Lublin, 13, Akademicka Str., 20-950 Lublin, Poland

© The Author(s), under exclusive license to Springer Nature Switzerland AG 2023

S. Pascuzzi and F. Santoro (eds.), *Farm Machinery and Processes Management*

in Sustainable Agriculture, Lecture Notes in Civil Engineering 289,

https://doi.org/10.1007/978-3-031-13090-8_3

dependences of the length of the trajectory of the movement of the ploughing aggregates were constructed for various lengths of the track (length of the cultivated field) and various plough widths. It will be an obvious advantage of the ploughing aggregate as part of a wheeled tractor with a minimum turning radius of not more than 5.3 m with a field length of 1400 m.

Keywords Turn · Headland · Ploughing width · Length of the field · Shuttle-like movement

1 Introduction

Reversible ploughs of various designs are widely used in the world [1–4].

The developers of these machines, together with the researchers, pay great attention to the improvement of the plough bodies and other elements [5–8]. In agrotechnical terms, they are interested to improve the running stability and performance quality of reversible ploughs both in a horizontal and a longitudinal-vertical plane [9, 10].

It should be noted that during the main operations the mode and trajectory of movement of the ploughing aggregates with reversible and conventional ploughs have no fundamental difference. This difference manifests itself when running of these ploughing aggregates on the headland.

The main advantage of the reversible ploughs is their ability to perform ploughing without tailing ridges and back furrows (Fig. 1) [11]. In this case the machine-and-tractor aggregate moves in a shuttle-like manner. In the process of moving on the headland, it makes loopy and, as a rule, pear-shaped turns. But the execution of such a maneuver is more complicated than, for instance, a loopless turn. And this complexity is the higher, the smaller is the width of the ploughing aggregate [12, 13].

When ploughing with a conventional plough, the ploughing aggregate with a working width B_p also performs loopy pear-shaped turns. But it does this only at the initial stage of work. And this stage continues until, after n passes of the aggregate, the width of the ploughed area (S_p) becomes equal to, or greater than twice, the minimum turning radius (R_o) of the tractor [14]: $S_p = n \cdot B_p \geq 2 R_o$. After that such a ploughing aggregate makes ordinary loopless turns with a rectilinear section.

As a result, it may turn out that, under certain conditions of work on the headlands of the field, the total length of the path of movement of the ploughing aggregates with reversible and conventional ploughs will be different. Because of this, the time spent by them for non-useful work will also be different. An aggregate with a large value of such time will have a lower performance and worse indicators of the specific fuel consumption. A priori assuming an increase in the non-productive time, spent by the ploughing aggregate with a reversible plough, the researchers propose certain solutions to this problem. One of them is the equipment of the ploughing aggregate with a reversible plough of special navigation systems [15]. Another solution is to



Fig. 1 Ploughing with a reversible plough

complicate the design of the tractor itself [16, 17]. It is a special device in the form of an additional support wheel which, after the unit has entered the headland, raises the front steering wheels of the tractor. As a result, turning of the aggregate takes place relative to the support point of the left or right rear wheel of the tractor that is braked during the turn. According to research data such a change in the design of the tractor reduces the width of the turning lane of the aggregate by 50%. In addition, the reduction in turning time reaches 35%. It should be emphasized that in practice the arable plots quite often have a shape that differs to varying degrees from the rectangular one. The choice of the optimal trajectory for turning the ploughing aggregate with a reversible plough, when working under such conditions, is a subject of research [18–22].

However, the authors of this article did not find studies that would allow giving a comparative assessment of the modes of movement of the ploughing aggregate on the headland, based on a reversible and a simple plough. Moreover, there are practically no such data for individual ploughing aggregate, gained on the basis either of a reverse plough or a conventional plough. As a result, this state of affairs does not allow one to decide more or less unequivocally on the expediency of using a reversible plough instead of a conventional one. In view of the foregoing, the present article is devoted to solving this problem”.

2 Materials and Methods

As indicators for estimation here were selected the total lengths of the trajectories (paths) of movement the ploughing aggregates with reversible ($\sum L_{xp}$) and conventional ($\sum L_{xs}$) ploughs on the headland.

For their calculation, we used our previously obtained theoretical assumptions (Bulgakov et al., 2016):

$$\sum L_{xp} = (7R_o + 2E) \cdot \left[\text{Integer} \left(\frac{\sqrt{2 \cdot (8R_o^2 + B_p L_p)}}{B_p} \right) - 1 \right] \quad (1)$$

$$\begin{aligned} \sum L_{xs} = & (7R_o + 2E) \cdot \left[\text{Integer} \left(\frac{2R_o}{B_p} \right) - 1 \right] + (1.7R_o + 2E) \\ & \cdot \left[\text{Integer} \left(\frac{\sqrt{2 \cdot (8R_o^2 + B_p L_p)}}{B_p} \right) - \text{Integer} \left(\frac{2R_o}{B_p} \right) \right] \\ & + B_p \sum_{i=0}^{n_{bp}} i \end{aligned} \quad (2)$$

where E – the path of movement of the ploughing aggregate on the headland before it begins to turn, m; L_p – the length of the arable area of the field, m; n_{bp} – the number of the loopless turns, performed by the ploughing aggregate with a conventional plough. Their number is determined from the following equation:

$$n_{bp} = \text{Integer} \left(\frac{\sqrt{2 \cdot (8R_o^2 + B_p L_p)}}{B_p} \right) - \text{Integer} \left(\frac{2R_o}{B_p} \right) \quad (3)$$

The designations of the remaining parameters, included in Eqs. (1)–(3), are indicated above in the text of the article.

In the research there were evaluated ploughing aggregates the ploughs of which are equipped with 0.35 m wide bodies. The smallest working width of the compared ploughing aggregates $B_p = 1.75$ m, and the largest - $B_p = 3.15$ m. These values correspond to the plough designs with 5 and 9 bodies, respectively.

A tractor was selected as the base one the minimum turning radius of which was changed within a 4–7 m range. The following values of parameter E corresponded to the ploughing aggregates composed on the basis of such a tractor were: 8.5; 9.5; 10.5; 11.5; 12.5 m.

The value of the length of the arable plot in the theoretical calculations was changed within a range $L_p = 600$ –1400 m.

3 Results and Discussion

Dependences (1) and (2) were obtained by comparing the operation of the ploughing aggregates with reversible and conventional ploughs on an arable plot of optimal width (C_{opt} , m). The value of this indicator is determined from the following relationship [23, 24]:

$$C_{opt} = \sqrt{2 \cdot (8R_o^2 + B_p L_p)} \tag{4}$$

The results of calculations using dependencies (1) and (2) show that, when the operating width B_p of the compared ploughs changes from 1.75 to 3.15 m, the values of the optimal width of the arable plots C_{opt} change from 50 to about 95 m (Fig. 2).

The smallest range of variation of this parameter (from 50 to 63 m) occurs at the field length $L_p = 600$ m (the red line 1, Fig. 2) but the largest (from 72 to 93 m) at $L_p = 1400$ m (red line 3). This fact indicates that the intensity of growth of the optimal width of the arable land is directly dependent on the increase in the length of the field. This fact indicates that the intensity of the growth of the optimal width of the arable land is directly dependent on the increase in the length of the field.

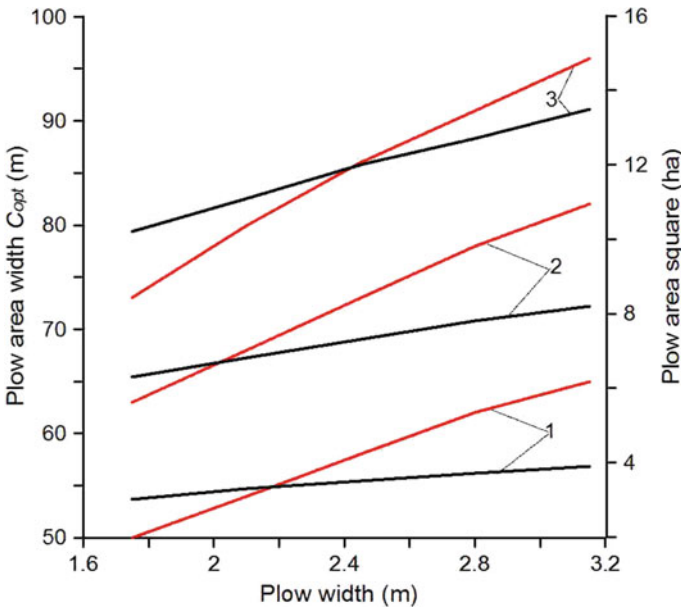


Fig. 2 Dependence of the optimal width of the arable plot (—) and its area (—) upon the operating width of the plough for various lengths of the field: 1 – $L_p = 600$ m; 2 – $L_p = 1000$ m; 3 – $L_p = 1400$ m

A quantitatively different but qualitatively similar nature of the change corresponds to the dynamics of the growth of the arable land area as parameters B_p and L_p increase (the black lines, Fig. 2).

When processing plots with such optimal values of the width and area, it turned out that expedience of using a ploughing aggregate with a reversible plough depends significantly on the length of the field. With the value of this parameter at the level of 600 m, the path travelled by the ploughing aggregate with a reversible plow on the headland for all values of the machine-tractor unit operating width is greater (curves 1, Fig. 3). The equality of the values of the indicators ΣL_{xp} (the reversible plough) and ΣL_{xs} (the ordinary plough) takes place at point A. This corresponds to the maximum value of parameter $B_p = 3.15$ m. At the minimum value of parameter $B_p = 1.75$ m indicator ΣL_{sp} is by 13% higher than the similar indicator ΣL_{xs} .

Analysis of these results leads to the conclusion that, when the length of the working area of the cultivated field is 600 m, the use of the ploughing aggregate with a reversible plow is not expedient.

When the field length is 1000 m and the plough working width is 1.75 m, the conventional ploughing aggregate has again an advantage, though a minimal one. The equality of the values of indicators ΣL_{xp} and ΣL_{xs} occurs at point B (Curves 2, Fig. 3), which corresponds to the plough width of 1.9 m. With a further increase in the value of this design parameter, the advantage passes to the ploughing aggregate with a reversible plough. At $B_p = 3.15$ m indicator ΣL_{xp} becomes less by 13% than the similar indicator ΣL_{xs} .

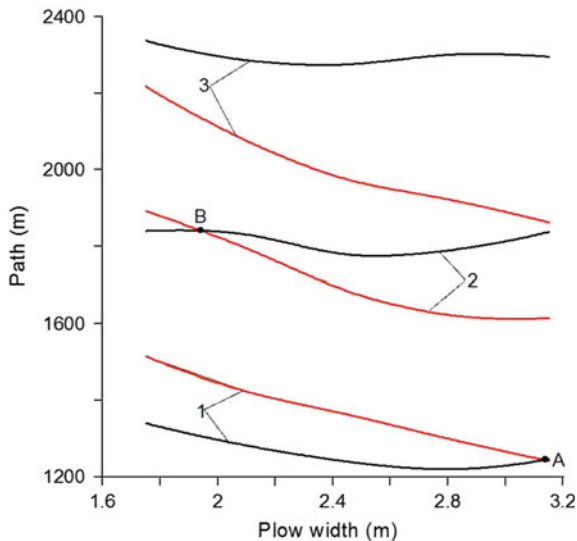


Fig. 3 The path of movement of the ploughing aggregate with a reversible (—) and a conventional (—) plough on the headland upon the width of the plough at different values of the length of the field: 1 — $L_p = 600$ m; 2 — $L_p = 1000$ m; 3 — $L_p = 1400$ m

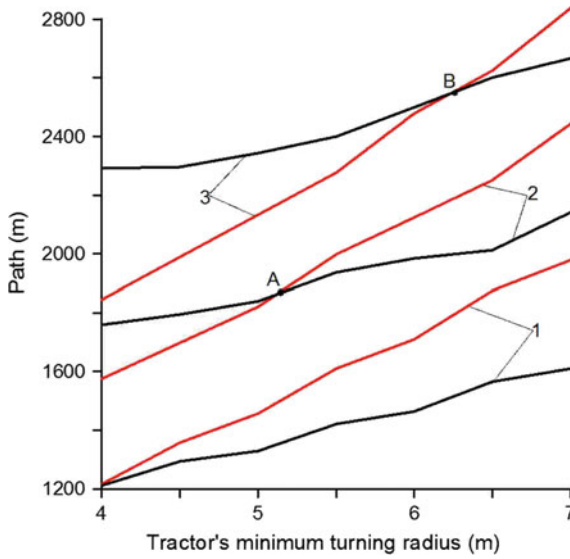


Fig. 4 The path of movement of the ploughing aggregate with a reversible (—) and a conventional (—) plough on the headland upon the minimum turning radius of the tractor at various values of field length: 1 – $L_p = 600$ m; 2 – $L_p = 1000$ m; 3 – $L_p = 1400$ m

The ploughing aggregate with a reversible plough gains full advantage when working on a field the length of which is 1400 m (Curves 3, Fig. 3). In this case the decrease in indicator ΣL_{xp} as compared to the similar indicator ΣL_{xs} increases from 5% (at $B_p = 1.75$ m) to 20% (at $B_p = 3.15$ m).

When the length of the field is 600 m, the length of the trajectory of the aggregate with a reversible plough will be longer than usual for any value of the minimum turning radius (Curves 1, Fig. 4). When the length of the field is 1000 m, the situation depends on the value of parameter R_o . At $R_o \leq 5.3$ m, the aggregate with a reversible plow has the best performance. In this case the value of indicator ΣL_{xp} is less than the value of indicator ΣL_{xs} (Curves 2, Fig. 4). At point B, which corresponds to the value of parameter R_o approximately 5.3 m, the difference between the values of these indicators is equal to zero. With further increase in the minimum turning radius of the tractor (and in this case, of the entire aggregate), a ploughing aggregate with a conventional plough becomes more efficient. A qualitatively similar result takes place when the length of the arable field is 1400 m. The only difference is that the preference of the ploughing aggregate with the reversible plough is maintained when the value of parameter R_o is increased to about 6.6 m (Curves 3, Fig. 4). At $L_p = 1400$ m the efficiency of the ploughing aggregate with a reversible plough has the greatest value when parameter R_o has a minimum value, i.e., 4 m. In this case, the value of the estimation indicator ΣL_{xp} is by 20% less than the value of indicator ΣL_{xs} . It should be added to the above analysis that the practitioners are aware of the technological methods that allow the operation of the ploughing aggregate with

a conventional plough virtually without any dump ridges and breakup furrows. One should not forget the fact that the ordinary plough is almost three times cheaper and much less complicated than the reverse one. All this indicates that without justified analysis the use of the latter may not be economically profitable. That is why the above research results may be useful when substantiating the choice of the type of the plough.

4 Conclusions

From the point of view of the length of the trajectory of movement the expediency of using a ploughing aggregate with the reversible plough essentially depends on the length of the field and the working width of the aggregate. With the value of this parameter at the level of 600 m, the use of a ploughing aggregate with the reversible plough instead of the usual one is characterised by an increase in the total path of its movement on the headland. When the working width of the aggregate is increased from 1.75 to 3.15 m, this growth takes place at any (from those considered in the calculations) minimum turning radius of the tractor, and it reaches 13%.

When the length of the field is 1000 m, the advantage of the ploughing aggregate with a reversible plough over the conventional one takes place at a working width of more than 1.9 m, and with a minimum tractor turning radius of less than 5.3 m.

Full advantage of the ploughing aggregate as part of a wheeled tractor with a minimum turning radius of not more than 6.3 m and a reversible plough takes place at the length of the field 1400 m. In comparison with the usual one, the total path of movement of such an aggregate on the headland, depending on its working width, is reduced by 5–20%.

References

1. Balwani SN, Gulhane UD, Sahu AR (2016) Design, modification and analysis of sha of two furrow reversible plough. *Int J Sci Technol Eng* 3:108–116
2. Chandra Mouli K, Arunkumar S, Satwik B, Ram SB, Rushi Tej J, Chaitanya AS (2018) Design of reversible plough attachment. *Mater Today Proc* 5:23702–23709. <https://doi.org/10.1016/J.MATPR.2018.10.160>
3. Yin Y, Guo S, Meng Z, Qin W, Li B, Luo C (2018) Method and system of plowing depth online sensing for reversible plough. *IFAC-PapersOnLine* 51:326–331. <https://doi.org/10.1016/j.ifacol.2018.08.199>
4. Bulgakov V, Pascuzzi S, Nadykto V, Ivanovs S, Adamchuk V (2021) Experimental study of the implement-and-tractor aggregate used for laying tracks of permanent traffic lanes inside controlled traffic farming systems. *Soil Tillage Res* 208:104895. <https://doi.org/10.1016/j.still.2020.104895>
5. Belousov SV, Trubilin EI (2013) The development of a reversible plough design for heavy soil treatment. *Sci Kuban* 1:31–37

6. Pascuzzi S, Anifantis AS, Santoro F (2020) The concept of a compact profile agricultural tractor suitable for use on specialised tree crops. *Agriculture* 10:123. <https://doi.org/10.3390/agriculture10040123>
7. Guerrieri AS, Anifantis AS, Santoro F, Pascuzzi S (2019) Study of a large square baler with innovative technological systems that optimize the baling effectiveness. *Agriculture* 9(5):86
8. Khalaf AAS, Salem NM, Khalaf AAS (2013) The dynamic properties of vertisols as affected by different types of plough under dry farming conditions. *Int Res J Agric Sci Soil Sci* 3:322–327. <https://doi.org/10.14303/irjas.2013.082>
9. Bulgakov V, Pascuzzi S, Adamchuk V, Kuvachov V, Nozdrovicky L (2019) Theoretical study of transverse offsets of wide span tractor working implements and their influence on damage to row crops. *Agriculture* 9:144
10. Trendafilov K (2010) Theoretical determination of the width of strip for turning when ploughing with trailed and semi-mounted reversible ploughs in a field with irregular shape. *Agric Sci Technol* 2:218–220
11. Pascuzzi S, Santoro F (2017) Analysis of the almond harvesting and hulling mechanization process. A case study. *Agriculture (Switzerland)* 7(12):100
12. Manetto G, Cerruto E, Pascuzzi S, Santoro F (2017) Improvements in citrus packing lines to reduce the mechanical damage to fruit. *Chem Eng Trans* 58:391–396
13. Bulgakov V et al (2016) Theoretical premises for enhancement of efficiency in the use of reversible ploughs. *Mech Agric Conserv Resour* 62:30–34
14. Baldoin C, Balsari P, Cerruto E, Pascuzzi S, Raffaelli M (2008) Improvement in Pesticide application on greenhouse crops: results of a survey about greenhouse structures in Italy. *Acta Hortic* 801:609–614. <https://doi.org/10.17660/ActaHortic.2008.801.69>
15. Heiß A, Paraforos DS, Griepentrog HW (2019) Determination of cultivated area, field boundary and overlapping for a plowing operation using ISO 11783 communication and D-GNSS position data. *Agriculture* 9:1–17. <https://doi.org/10.3390/agriculture9020038>
16. Zeleniy PV, Scherbakova OK (2016) Mathematical model and methodology for calculation of minimization on turning radius of tractor unit with replaceable supporting and maneuvering device. *Sci Tech* 15:216–224. <https://doi.org/10.21122/2227-1031-2016-15-3-216-224>
17. Bulgakov V, Pascuzzi S, Anifantis AS, Santoro F (2019) Oscillations analysis of front-mounted beet topper machine for biomass harvesting. *Energies* 12:2774
18. Trendafilov K (2017) Analysis of non-working moves performed by semi-mounted reversible plough in a headland. *Appl Res Tech Technol Educ* 5:79–85. <https://doi.org/10.15547/artte.2017.02.001>
19. Bulgakov V et al (2021) Study of the steering of a wide span vehicle controlled by a local positioning system. *J Agric Eng LII*:1144. <https://doi.org/10.4081/jae.2021.1144>
20. Bulgakov V, Pascuzzi S, Ivanovs S, Nadykto V, Nowak J (2020) Kinematic discrepancy between driving wheels evaluated for a modular traction device. *Biosys Eng* 196:88–96. <https://doi.org/10.1016/j.biosystemseng.2020.05.017>
21. Pascuzzi S, Blanco I, Anifantis AS, Scarascia Mugnozza G (2016) Hazards assessment and technical actions due to the production of pressured hydrogen within a pilot photovoltaic-electrolyzer-fuel cell power system for agricultural equipment. *J Agric Eng XLVII*:507:89–93
22. Bulgakov V, Pascuzzi S, Adamchuk V, Ivanovs S, Pylypaka S (2019) A theoretical study of the limit path of the movement of a layer of soil along the plough mouldboard. *Soil Tillage Res* 195:104406. <https://doi.org/10.1016/j.still.2019.104406>
23. Bulgakov V, Pascuzzi S, Beloev H, Ivanovs S (2019) Theoretical investigations of the headland turning agility of a trailed asymmetric implement-and-tractor aggregate. *Agriculture* 9:224. <https://doi.org/10.3390/agriculture9100224>
24. Pascuzzi S, Santoro F, Manetto G, Cerruto E (2018) Study of the correlation between foliar and patternator deposits in a Tendone vineyard. *Agric Eng Int CIGR J* 20(3):97–107